

KDD90CNE



Product family Hood DownDraft **Hood Type** Fully integrated Design Extraction Extraction **Electronic control** Yes Perimeter extraction Yes Material Glass Type of steel **Brushed**

Hood width 90 cm



Aesthetics

EAN code

Universale Glass Type **Aesthetic** Black Colour Serigraphy colour Black Silver **Finishing** Glass Logo Silk screen

8017709305796

Controls



Control setting

Touch control Led color White

Display

Digital

Programs / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options





Technical Features





No. of lights





KITRBDD - Kit Optional

1

Free outlet maximum capacity

725 m³/h

SMEG SPA

05/05/2024



Light type **LED Light Power** 7 W Dimmer mode Yes Light color temperature 4000 °K

scale (°K)

Motor power 270 W

No. of filters

Anti-grease filters Aluminium Yes

Filter replacement

indicator

Vent outlet 150 mm

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dB(A)]
Speed 1	160	40
Speed 2	290	53
Speed 3	350	54
Speed 4	430	60
Intensive speed	700	70

Accessories Included

Tube reduction Motorised opening Yes Yes

Performance / Energy Label

Α

Annual Efficiency 58 kWh/a Airborne acoustical A-54 dB(A) Consumption (AEChood) weighted sound Power **Emission at maximum** Energy efficieency class A speed (SPEmax) (EEC) Airbourne acoustical A- 70 dB(A) Fluid Dynamic Efficiency 30 weighted sound power (FDE) emission at boost speed Fluid Dynamic Efficiency A (SPEboost) class (FDEC) **Power Consumption in** 0.49 W Lighting Efficiency (LE) 29 lux/W Off mode (Po) Lighting Efficiency Class A Time increase factor (F) 0.9 (LEC) **Energy Efficiency Index** 53.8 **Grease Filtering** 65,1 % Measured air flow rate 397 m³/h Efficiency (GFE) at best efficiency point **Grease Filtering** (Qbep) Efficiency Class (GFEC) Measured air pressure 441 Pa Air flow at minumum 160 m³/h at best efficiency point speed (Qmin) (Pbep) Air flow at maximum 350 m³/h Measured electric 162 W speed (Qmax) power input at best Air flow at boost speed 700 m³/h efficiency point (Wbep) (Qboost) **Nominal Power** 7 W Airbourne acouistical A- 40 dB(A) consumption of the light weighted sound Power system (WL) **Emission at minimum** Average illumination of 200 lux speed (SPEmin) the light on the cooking

SMEG SPA 05/05/2024

surface (Emiddle)



Sound power level at highest setting (Lwa)

54 dB(A)

Electrical Connection

Plug (F;E) Schuko Electrical connection 277 W


rating

Voltage 220-240 V

Frequency (Hz)
Power supply cable length

50-60 Hz 1500 mm

Also available

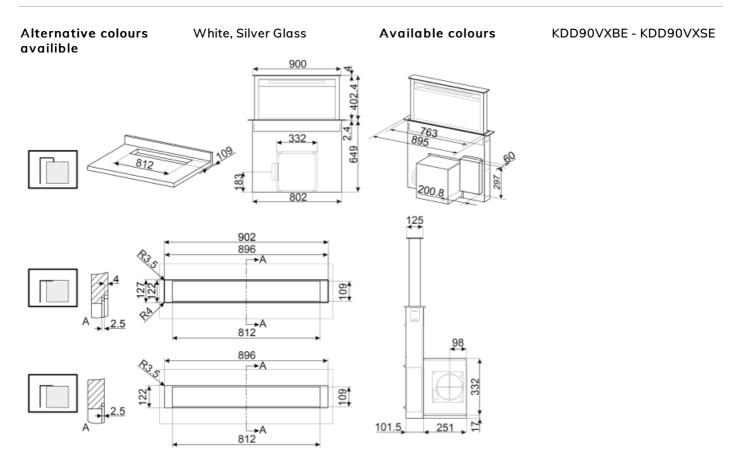

SMEG SPA 05/05/2024



Not included accessories

KITFCDD



Charcoal filter for hood Down Draft Kit 1 piece Dishwasher safe



RCKF2 Remote control

KITRBDD

kit remote blower for DD hood. Cable lenght: 7 meters.

SMEG SPA 05/05/2024



Symbols glossary (TT)



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Electronic display: to give a visual reminder of the options selected.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Intensive/turbo setting: when extra fast extraction is required.



Dimmering Lights

SMEG SPA 05/05/2024