

KDD90CNE2




Product family

Hood Type	Downdraft Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Painted material
EAN code	8017709346126
Hood width	90 cm
Aesthetics	Universal
Colour	Black
Finishing	Glass
Glass Type	Black
Serigraphy colour	Silver
Logo	Silk screen



Controls



Control setting	Touch control
Led colour	White

Display

Digital

Program / Functions

No. of speeds

4

Intensive speed



24h air filter function



Other functions

Delay_function

Time-setting options



Technical Features



Remote motor

KITRBDD - Kit Optional

Free outlet maximum capacity

740 m³/h

No. of lights

1

Motor power

250 W

Light type

LED

No. of filters

2

Light power

5 W

Anti-grease filters

Aluminium

Dimmer mode

Yes

Filter replacement indicator

Yes

Light colour

4000 K

temperature scale (K)

Vent outlet 150 mm

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	200	43
Speed 2	280	49
Speed 3	350	53
Speed 4	440	57
Intensive speed	720	68

Accessories Included

Remote control	Optional	Tube reduction	Yes
Sliding door	Yes		

Performance / Energy Label


	Annual Efficiency Consumption (AEChood)	57 kWh/year	Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)	43 dBA
	Energy efficiency class (A EEC)		Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)	53 dBA
	Fluid Dynamic Efficiency (FDE)	29.30	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	68 dBA
	Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.9
	Lighting Efficiency (LE)	40 lux/W	Energy Efficiency Index per first cavity	53.1
	Lighting Efficiency Class (LEC)	A		
	Grease Filtering Efficiency (GFE)	65.1 %	Measured air flow rate at best efficiency point (Qbep)	398 m ³ /h
	Grease Filtering Efficiency Class (GFEC)	D	Measured air pressure at best efficiency point (Qbep)	429 Pa
	Air flow at minimum speed (Qmin)	200 m ³ /h	Measured electric power input at best efficiency point (Wbep)	162 W
	Maximum extraction rate	350 m ³ /h	Normal Power of the light system (WI)	5 W
	Intensive extraction rate	720 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	200 lux
			Sound power level at highest setting (Lwa)	49 dBA

Electrical Connection

Nominal power	255 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	(F;E) Schuko
Frequency (Hz)	50-60 Hz		

Also available

Alternative colours available White, Silver Glass

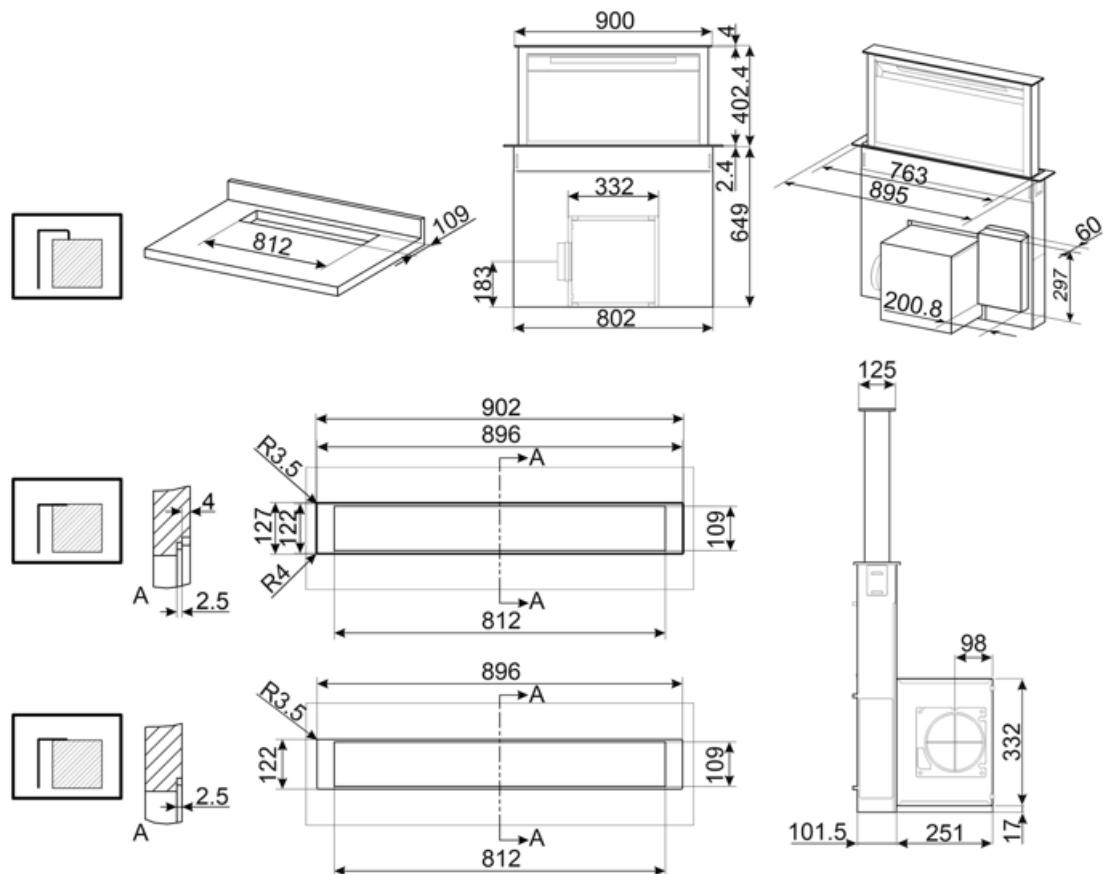

Compatible Accessories

KITFCDD



Charcoal filter for hood Down Draft Kit 1 piece Dishwasher safe

KITRBDD

kit remote blower for DD hood



RCKF2

Remote control

Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	A: Product drying performance, measured from A+++ to D / G depending on the product family		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Electronic display: to give a visual reminder of the options selected.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Perimeter extraction panels: very efficient and aid noise reduction.
	Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.		Intensive/turbo setting: when extra fast extraction is required.
	Dimmering Lights		