


KDD90CNE2



| | |
|-----------------------------|---------------------------------------|
| Product family | Hood |
| Hood Type | Downdraft Cooker Hoods |
| Design | Fully integrated |
| Extraction | Ducted out or re-circulation possible |
| Electronic control | Yes |
| Perimeter extraction | Yes |
| Material | Painted material |
| EAN code | 8017709346126 |
| Hood width | 90 cm |
| Aesthetics | Universal |
| Colour | Black |
| Finishing | Glass |
| Glass Type | Black |
| Serigraphy colour | Silver |
| Logo | Silk screen |



Controls



| | | | |
|------------------------|---------------|----------------|---------|
| Control setting | Touch control | Display | Digital |
| Led colour | White | | |

Program / Functions

| | |
|--|---|
| No. of speeds | 4 |
| Intensive speed |  |
| 24h air filter function |  |
| Other functions | |
|  Delay_function | |
| Time-setting options |  |

Technical Features



| | | | |
|----------------------|------------------------|-------------------------------------|-----------------------|
| Remote motor | KITRBDD - Kit Optional | Free outlet maximum capacity | 740 m ³ /h |
| No. of lights | 1 | Motor power | 250 W |
| Light type | LED | No. of filters | 2 |
| Light power | 5 W | Anti-grease filters | Aluminium |
| Dimmer mode | Yes | | |

| | | | |
|------------------------------------|--------|------------------------------|--------|
| Light colour temperature scale (K) | 4000 K | Filter replacement indicator | Yes |
| | | Vent outlet | 150 mm |

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|---|----------------------------------|
| Speed 1 | 200 | 43 |
| Speed 2 | 280 | 49 |
| Speed 3 | 350 | 53 |
| Speed 4 | 440 | 57 |
| Intensive speed | 720 | 68 |

Accessories Included

| | | | |
|----------------|----------|----------------|-----|
| Remote control | Optional | Tube reduction | Yes |
| Sliding door | Yes | | |

Performance / Energy Label




| | | | |
|--|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEChood) | 57 kWh/year | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 43 dBA |
| Energy efficiency class (EEC) | A | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 53 dBA |
| Fluid Dynamic Efficiency (FDE) | 29.30 | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 68 dBA |
| Fluid Dynamic Efficiency class (FDEC) | A | Time increase factor (F) | 0.9 |
| Lighting Efficiency (LE) | 40 lux/W | Energy Efficiency Index per first cavity | 53.1 |
| Lighting Efficiency Class (LEC) | A | Measured air flow rate at best efficiency point (Qbep) | 398 m ³ /h |
| Grease Filtering Efficiency (GFE) | 65.1 % | Measured air pressure at best efficiency point (Qbep) | 429 Pa |
| Grease Filtering Efficiency Class (GFEC) | D | Measured electric power input at best efficiency point (Wbep) | 162 W |
| Air flow at minumum speed (Qmin) | 200 m ³ /h | Normal Power of the light system (WI) | 5 W |
| Maximum extraction rate | 350 m ³ /h | Average illumination of the light on the cooking surface (Emiddle) | 200 lux |
| Intensive extraction rate | 720 m ³ /h | Sound power level at highest setting (Lwa) | 49 dBA |

Electrical Connection

| | | | |
|----------------|-----------|---------------------------|--------------|
| Nominal power | 255 W | Power supply cable length | 1500 mm |
| Voltage | 220-240 V | Plug | (F;E) Schuko |
| Frequency (Hz) | 50-60 Hz | | |

Also available

Alternative colours available White, Silver Glass

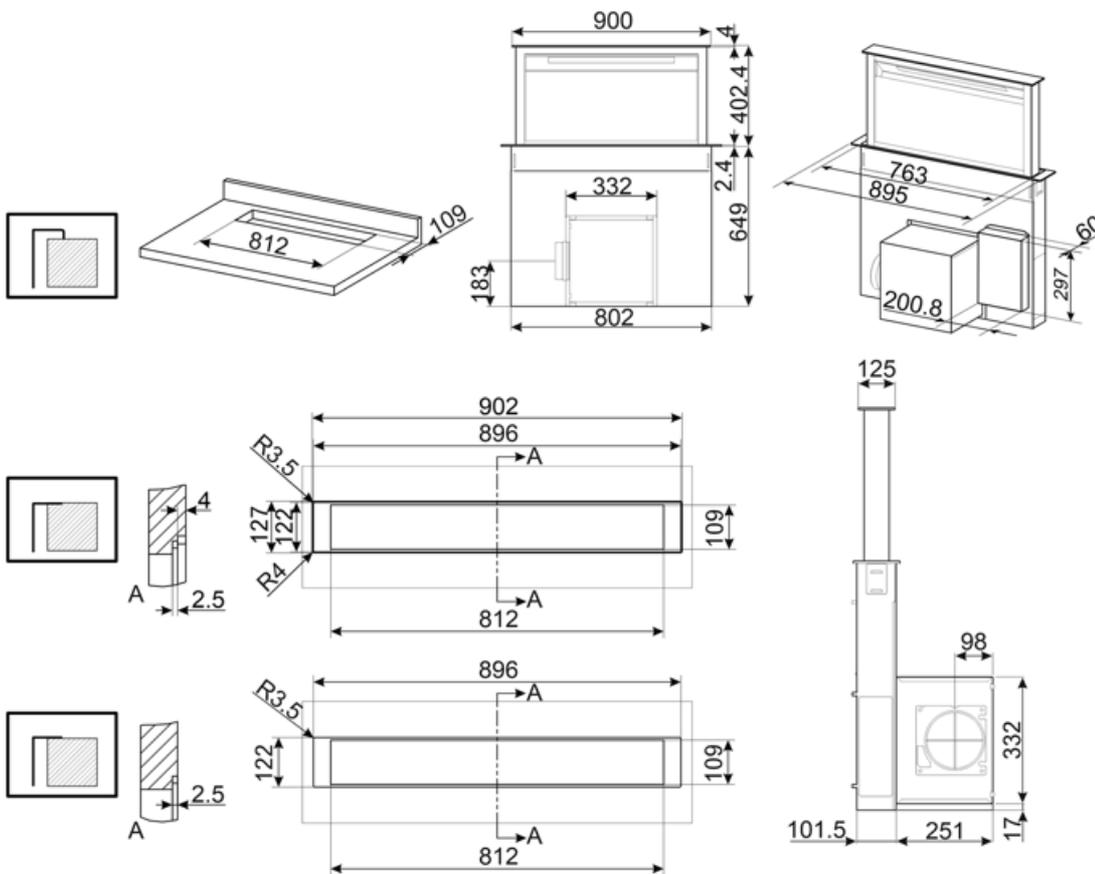

Compatible Accessories



KITFCDD

Charcoal filter for hood Down Draft Kit 1 piece Dishwasher safe



RCKF2

Remote control

KITRBDD

kit remote blower for DD hood

Symbols glossary

| | | | |
|---|---|--|--|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | A: Product drying performance, measured from A+++ to D / G depending on the product family |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Delay timer: can be set to run the programme at a convenient time or to take advantage of off-peak energy periods. |  | Electronic display: to give a visual reminder of the options selected. |
|  | Warning light(s): to advise when filters need changing. |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |
|  | Perimeter extraction panels: very efficient and aid noise reduction. |  | Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button. |
|  | Intensive/turbo setting: when extra fast extraction is required. |  | Dimmering Lights |