

KDD90CNE2



Product family	Hood
Hood Type	DownDraft
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Painted material
EAN code	8017709346126
Hood width	90 cm
Aesthetic	Universale
Colour	Black
Finishing	Glass
Glass Type	Black
Serigraphy colour	Silver
Logo	Silk screen



Controls



Control setting	Touch control	Display	Digital
Led color	White		

Program / Functions

No. of speeds	4
Intensive speed	
24h air filter function	
Other functions	Delay_function
Time-setting options	

Technical Features



Remote motor	KITRBDD - Kit Optional	Free outlet maximum capacity	740 m³/h
No. of lights	1	Motor power	250 W
Light type	LED	No. of filters	2
Light Power	5 W	Anti-grease filters	Aluminium
Dimmer mode	Yes	Filter replacement indicator	Yes
Light color temperature scale (K)	4000 K		

Vent outlet

150 mm

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	200	43
Speed 2	280	49
Speed 3	350	53
Speed 4	440	57
Intensive speed	720	68

Accessories included

Remote control	Optional	Tube reduction	Yes
Motorised opening	Yes		

Performance / Energy Label


	Annual Efficiency Consumption (AEChood)	57 kWh/a	Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)	43 dBA
	Energy efficicency class (EEC)	A	Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)	53 dBA
	Fluid Dynamic Efficiency (FDE)	29.30	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	68 dBA
	Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.9
	Lighting Efficiency (LE)	40 lux/W	Energy Efficiency Index	53.1
	Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	398 m ³ /h
	Grease Filtering Efficiency (GFE)	65.1 %	Measured air pressure at best efficiency point (Pbep)	429 Pa
	Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	162 W
	Air flow at minumum speed (Qmin)	200 m ³ /h	Nominal Power consumption of the light system (WL)	5 W
	Air flow at maximum speed (Qmax)	350 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	200 lux
	Air flow at boost speed (Qboost)	720 m ³ /h	Sound power level at highest setting (Lwa)	49 dBA

Electrical Connection

Electrical connection rating	255 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	(F;E) Schuko
Frequency (Hz)	50-60 Hz		

Also available

Alternative colours available

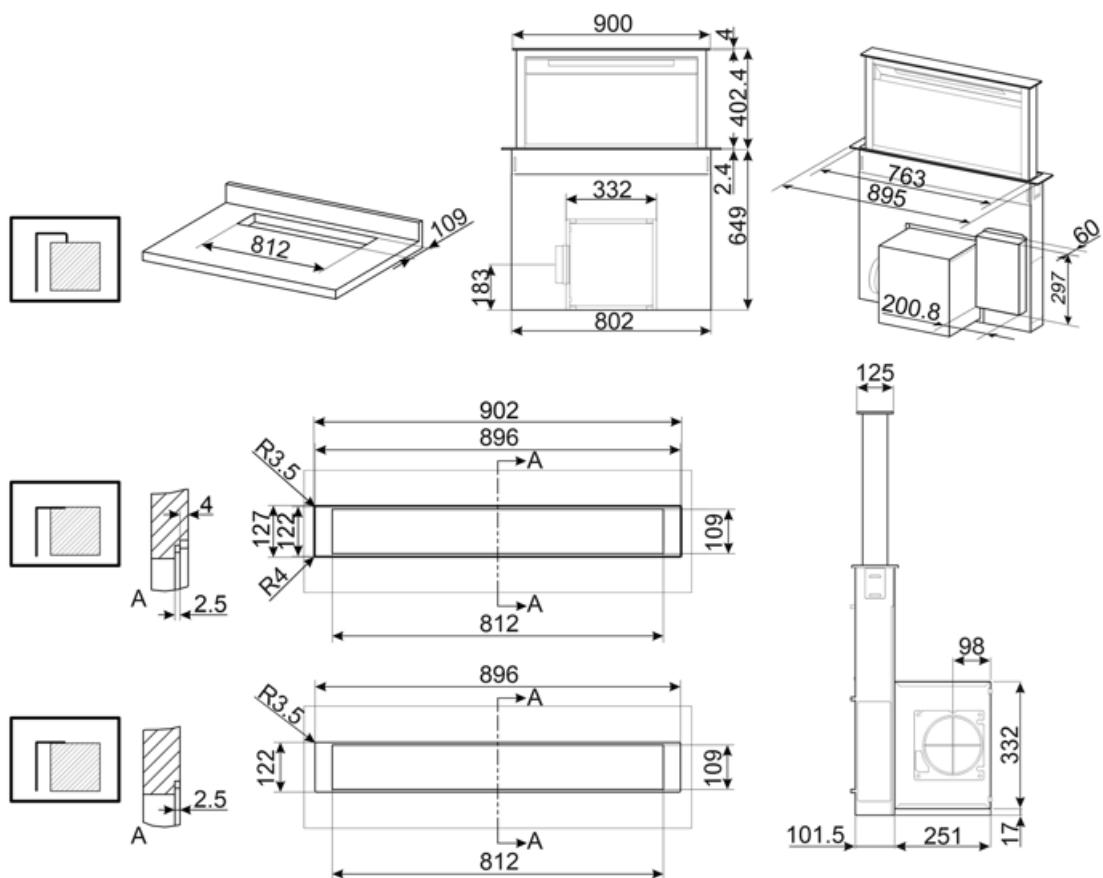

Compatible Accessories

KITFCDD



Charcoal filter for hood Down Draft Kit 2 pieces. Dishwasher safe

KITRBDD

kit remote blower for DD hood. Cable lenght: 7 meters.



RCKF2

Remote control

Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Dimmering Lights



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Electronic display: to give a visual reminder of the options selected.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.