

KDD90CNE2

Perimeter extraction



Product family Hood **Hood Type** DownDraft Design Fully integrated Extraction Extraction **Electronic control** Yes

Material Painted material EAN code 8017709346126

Yes

Hood width 90 cm **Aesthetic** Universale Colour Black **Finishing** Glass Glass Type Black Serigraphy colour Silver Silk screen Logo



Controls





Control setting Touch control

White Led color

Display

Digital

Program / Functions

No. of speeds Intensive speed

24h air filter function

Other functions

Time-setting options



Delay_function



Technical Features









Remote motor KITRBDD - Kit Optional

No. of lights Light type **LED Light Power** 5 W Dimmer mode Yes Light color temperature 4000 K

scale (K)

Free outlet maximum

capacity

Motor power 250 W No. of filters

Anti-grease filters Filter replacement

indicator

740 m³/h

Aluminium Yes

SMEG SPA 12/6/2025



Vent outlet

150 mm

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	200	43
Speed 2	280	49
Speed 3	350	53
Speed 4	440	57
Intensive speed	720	68

Accessories included

Remote control Optional Motorised opening Yes

Tube reduction

Yes

Performance / Energy Label

	A
	f

Annual Efficiency 57 kWh/a Airbourne acouistical A- 43 dBA Consumption (AEChood) Energy efficieency class A speed (SPEmin) (EEC) Fluid Dynamic Efficiency 29.30 (FDE) Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Lighting Efficiency (LE) 40 lux/W Lighting Efficiency Class A (LEC) (SPEboost) **Grease Filtering** 65.1 % Efficiency (GFE) **Grease Filtering** D Efficiency Class (GFEC) Air flow at minumum 200 m³/h (Qbep) speed (Qmin) Air flow at maximum 350 m³/h speed (Qmax) (Pbep) Air flow at boost speed 720 m³/h (Qboost) **Nominal Power** system (WL)

weighted sound Power **Emission at minimum** Airborne acoustical A-53 dBA weighted sound Power **Emission at maximum** Airbourne acoustical A- 68 dBA weighted sound power emission at boost speed Time increase factor (F) 0.9 **Energy Efficiency Index** 53.1 Measured air flow rate 398 m³/h at best efficiency point Measured air pressure 429 Pa at best efficiency point Measured electric 162 W power input at best efficiency point (Wbep) 5 W consumption of the light Average illumination of 200 lux

the light on the cooking surface (Emiddle) Sound power level at 49 dBA highest setting (Lwa)

SMEG SPA 12/6/2025



Electrical Connection

Electrical connection

255 W

rating


Voltage 220-240 V Frequency (Hz) 50-60 Hz Power supply cable

1500 mm

length

Plug (F;E) Schuko

Also available

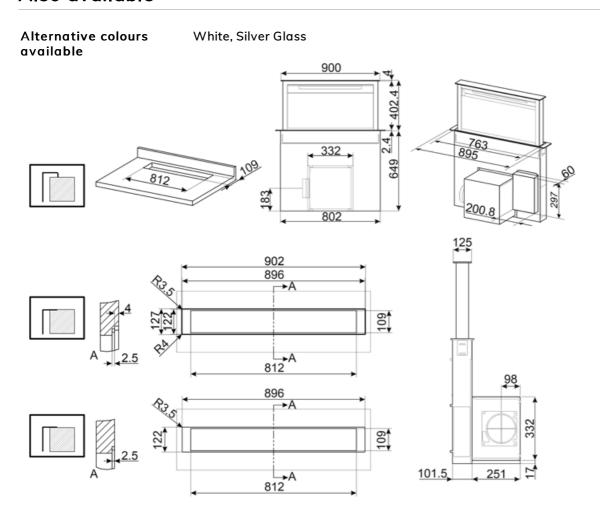

SMEG SPA 12/6/2025



Compatible Accessories

KITFCDD



Charcoal filter for hood Down Draft Kit 2 pieces. Dishwasher safe

RCKF2



Remote control

KITRBDD

kit remote blower for DD hood. Cable lenght: 7 meters.

SMEG SPA 12/6/2025



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Electronic display: to give a visual reminder of the options selected.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Intensive/turbo setting: when extra fast extraction is required.



Dimmering Lights

SMEG SPA 12/6/2025