

KDD90VXSE



Product family	Hood
Tipo de Exaustor	Fully Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709270407
Aesthetic	Universal
Colour	Silver
Acabamento	Satin
Glass Type	Silver
Cor da serigrafia	Serigrafia em branco
Logotipo	Logotipo serigrafado



Controls



Control setting	Touch control	Display	Digital
Led color	Ice		

Program / Functions

No. of speeds	4
Intensive speed	
24h air filter function	
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	No

Technical Features



Hood without motor	No	Motor power	270 W
Remote motor	KITRBDD - Kit Optional	No. of filters	2
No. of lights	1	Anti-grease filters	Aluminium
Light type	LED	Charcoal filters included	No
Light Power	7 W	Filter replacement indicator	Yes

Dimmer mode	Yes	Vent outlet	150 mm
Escala de temperatura de cor clara (°K)	4000 °K	Non return valve	No
Free outlet maximum capacity	725 m³/h		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	160	40
Speed 2	290	53
Speed 3	350	54
Speed 4	430	60
Intensive speed	700	70

Accessories Included

Remote control	No	Tube reduction	Yes
Sliding door	Yes		

Performance / Energy Label



Consumo anual de energia (CAE exaustor)	58 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	40 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	54 dBA
Fluid Dynamic Efficiency (FDE)	30	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	29 lux/W	Energy Efficiency Index	53,8
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	397 m³/h
Grease Filtering Efficiency (GFE)	65,1 %	Measured air pressure at best efficiency point (Pbep)	441 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	162 W
Air flow at minumum speed (Qmin)	160 m³/h	Nominal Power consumption of the light system (WL)	7 W
Air flow at maximum speed (Qmax)	350 m³/h	Average illumination of the light on the cooking surface (Emiddle)	200 lux
Air flow at boost speed (Qboost)	700 m³/h		




Sound power level at
highest setting (Lwa) 54 dBA

Electrical Connection

Plug	(F;E) Schuko	Frequency (Hz)	50-60 Hz
Electrical connection rating	277 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V		

Also available

Outras cores disponíveis	Branca, Preta	Códigos das outras cores disponíveis	KDD90VXBE - KDD90VXNE
--------------------------	---------------	---	-----------------------

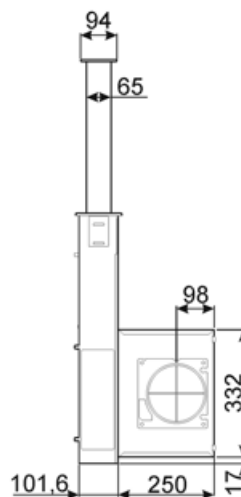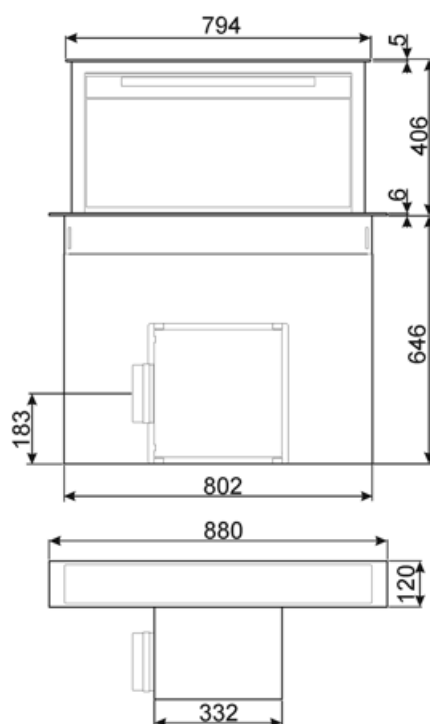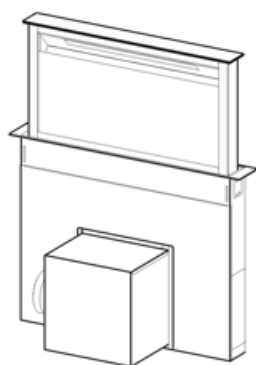

Compatible Accessories



KITFCDD

Filtro de carvão para exaustor de bancada Kit 1 peça Pode ser lavado na máquina lava-louça



KITVENT150

Motor entrada 150 mm com válvula de não retorno



KITRBDD

kit ventilador remoto para exaustor DD

RCKF2

Comando à distância

Symbols glossary

	24h: Quando selecionada, esta função refresca o ar durante cerca de 10 minutos a cada hora durante um período de 24 horas, a uma velocidade mínima e a um nível de ruído imperceptível.		R: Desempenho de secagem do produto, medido de A++ a D/G, dependendo da família de produtos
	Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.		Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.
	Visor eletrônico: para exibir um lembrete visual das opções selecionadas.		Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.
	Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.		Painéis de extração de perímetro: muito eficiente e ajuda na redução de ruído.
	Controles táteis: O controles táteis, fáceis de usar, permitem que o aparelho seja programado com o toque de um botão.		Configuração intensiva/turbo: quando a extração extra rápida é necessária.
	Luzes de escurecimento		

Benefit (TT)

Dimmering & Tunable lights

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones

Perimetral aspiration

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture