

# KDE600EX

Product family Hood

Hood Type Decorative wall hood

DesignChimneyExtractionExtractionMaterialStainless steelType of steelBrushed

**EAN code** 8017709235154

Aesthetic Universale Colour Stainless steel

Finishing Satin

Components finishing Stainless steel

Serigraphy colour Black
Logo Silk screen



#### **Controls**

Control setting Buttons

# **Program / Functions**

No. of speeds 3

### **Technical Features**





No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersAluminiumLight Power3 WVent outlet150 mmLight color temperature2700 °KMinimum distance from700 mm

scale (°K) GAS hob

Free outlet maximum 588 m³/h Minimum distance from 500 mm

capacity ELECTRIC hob

Motor power 180 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	202	42
Speed 2	307	52



Speed 5	53	65
---------	----	----

### **Accessories Included**

Tube reduction Yes

## Performance / Energy Label

**Annual Efficiency** 103 kWh/a

Consumption (AEChood) Energy efficieency class D

(EEC)

Fluid Dynamic Efficiency 12,6

(FDE)

Fluid Dynamic Efficiency E

class (FDEC)

Lighting Efficiency (LE) 16,1 lux/W

Lighting Efficiency Class C

(LEC)

**Grease Filtering** 76 %

Efficiency (GFE)

**Grease Filtering** C Efficiency Class (GFEC)

Air flow at minumum

speed (Qmin)

Air flow at maximum

speed (Qmax)

Voltage

Airbourne acouistical A- 44 dBA

67 dBA

255 Pa

50-60 Hz

1500 mm

weighted sound Power **Emission at minimum** 

speed (SPEmin)

Airborne acoustical Aweighted sound Power

**Emission at maximum** speed (SPEmax)

Time increase factor (F) 1.5

Measured air flow rate 320 m<sup>3</sup>/h at best efficiency point

(Qbep)

Measured air pressure

at best efficiency point

(Pbep)

Measured electric 180 W

power input at best efficiency point (Wbep)

**Nominal Power** 6 W

consumption of the light

system (WL)

Average illumination of 97 lux

the light on the cooking

surface (Emiddle)

Sound power level at 67 dBA

highest setting (Lwa)

#### **Electrical Connection**

Not present Frequency (Hz) Plug **Electrical connection** 186 W Power supply cable

rating length 220-240 V


208 m<sup>3</sup>/h

559 m<sup>3</sup>/h

## Optional accessories

Charcoal filter KITFC450



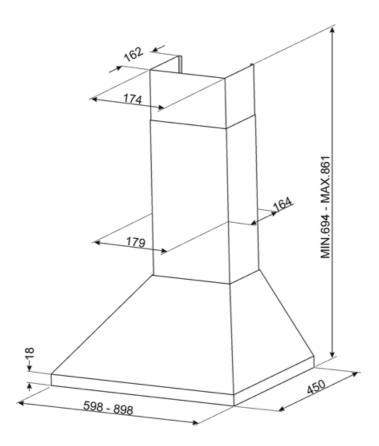



# **Compatible Accessories**

### KITFC450

Charcoal filters ROUND Kit 2 pieces KDE600XE KDE900XE





# Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.