

# KDE600EX

|                |                      |
|----------------|----------------------|
| Product family | Hood                 |
| Hood Type      | Decorative wall hood |
| Design         | Chimney              |
| Extraction     | Extraction           |
| Material       | Stainless steel      |
| Type of steel  | Brushed              |
| EAN code       | 8017709235154        |
| Hood width     | 60 cm                |



## Aesthetics

|           |                 |                      |                 |
|-----------|-----------------|----------------------|-----------------|
| Aesthetic | Universale      | Components finishing | Stainless steel |
| Colour    | Stainless steel | Serigraphy colour    | Black           |
| Finishing | Satin           | Logo                 | Silk screen     |



## Controls

|                 |         |
|-----------------|---------|
| Control setting | Buttons |
|-----------------|---------|

## Programme / Functions

|               |   |
|---------------|---|
| No. of speeds | 3 |
|---------------|---|

## Technical Features

|  |   |                                    |           |
|--|---|------------------------------------|-----------|
|  |  |                                    |           |
| No. of lights  | 2   | No. of filters                     | 2         |
| Light type   | LED   | Anti-grease filters                | Aluminium |
| Light Power  | 3 W   | Vent outlet                        | 150 mm    |
| Light color temperature scale (°K)   | 2700 °K   | Minimum distance from GAS hob      | 700 mm    |
| Free outlet maximum capacity   | 588 m³/h  | Minimum distance from ELECTRIC hob | 500 mm    |
| Motor power  | 180 W   | Non return valve                   | Yes       |

|            | Extraction rate IEC<br>61591 [m³/h] | Noise level IEC 60704-2-13<br>[dB(A)] |
|------------|-------------------------------------|---------------------------------------|
| Speed<br>1 | 202                                 | 42                                    |
| Speed<br>2 | 307                                 | 52                                    |
| Speed<br>3 | 553                                 | 65                                    |

## Accessories Included

Tube reduction Yes

## Performance / Energy Label



Annual Efficiency Consumption (AEChood) 103 kWh/a

Energy efficiency class (EEC) D

Fluid Dynamic Efficiency (FDE) 12.6

Fluid Dynamic Efficiency class (FDEC) E

Lighting Efficiency (LE) 16.1 lux/W

Lighting Efficiency Class (LEC) C

Grease Filtering Efficiency (GFE) 76 %

Grease Filtering Efficiency Class (GFEC) C

Air flow at minumum speed (Qmin) 208 m³/h

Air flow at maximum speed (Qmax) 559 m³/h

Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin) 44 dB(A)

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 67 dB(A)

Time increase factor (F) 1.5

Measured air flow rate at best efficiency point (Qbep) 320 m³/h

Measured air pressure at best efficiency point (Pbep) 255 Pa

Measured electric power input at best efficiency point (Wbep) 180 W

Nominal Power consumption of the light system (WL) 6 W

Average illumination of the light on the cooking surface (Emiddle) 97 lux

Sound power level at highest setting (Lwa) 67 dB(A)

## Electrical Connection

Plug Not present

Electrical connection rating 186 W

Voltage 220-240 V

Frequency (Hz) 50-60 Hz


Power supply cable length 1500 mm

## Optional accessories

---

Charcoal filter

KITFC450

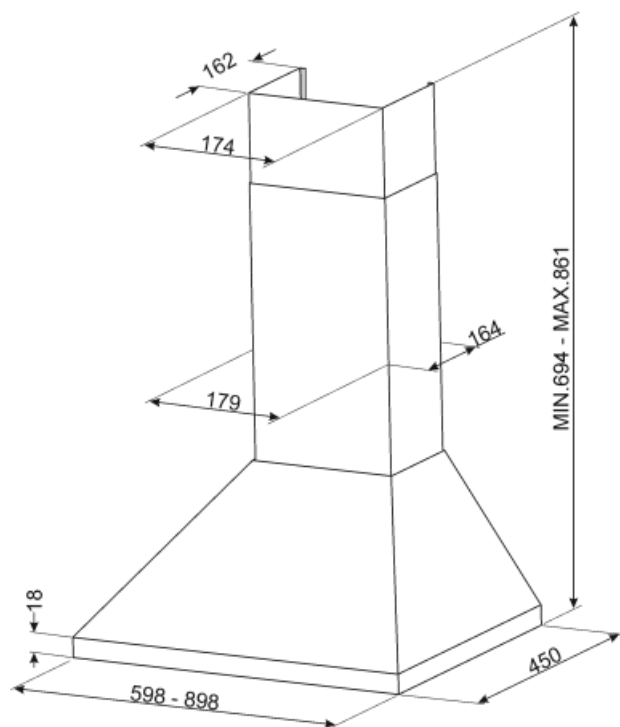

---

## Not included accessories

---

**KITFC450**

Charcoal filters ROUND Kit 2 pieces KDE600XE KDE900XE



---

## Symbols glossary (TT)

---



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.