

KDE900EX

Product family

Hood Type Decorative wall hood

Hood

Design Chimney Extraction Extraction Material Stainless steel Type of steel Brushed

EAN code 8017709235161

Hood width 90 cm



Aesthetics

Universale Components finishing **Aesthetic** Stainless steel Stainless steel Serigraphy colour Colour Black **Finishing** Satin Silk screen

Logo

Controls

Control setting Buttons

Programs / Functions

3 No. of speeds

Technical Features



No. of lights No. of filters

Light type LED Anti-grease filters Aluminium **Light Power** 3 W Vent outlet 150 mm Light color temperature 2700 °K Minimum distance from 700 mm

GAS hob scale (°K)

180 W

Free outlet maximum 588 m³/h Minimum distance from 500 mm

capacity **ELECTRIC hob**

Motor power Non return valve Yes

27/07/2024 **SMEG SPA**



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	202	42
Speed 2	307	52
Speed 3	553	65

Accessories Included

Tube reduction Yes

Performance / Energy Label

D | A ---

Annual Efficiency 103 kWh/a Consumption (AEChood) Energy efficieency class D (EEC)

Fluid Dynamic Efficiency 12.6 (FDE) Fluid Dynamic Efficiency E

class (FDEC)

Lighting Efficiency (LE) 16.1 lux/W

Lighting Efficiency Class C (LEC)

Grease Filtering 76 % Efficiency (GFE)

Grease Filterina C Efficiency Class (GFEC)

Air flow at minumum 208 m³/h

speed (Qmin)

Air flow at maximum 559 m³/h

speed (Qmax)

Voltage

Airbourne acouistical A- 44 dB(A)

weighted sound Power Emission at minimum speed (SPEmin)

Airborne acoustical A-67 dB(A) weighted sound Power **Emission at maximum** speed (SPEmax)

Time increase factor (F) Measured air flow rate 320 m³/h

at best efficiency point (Qbep)

Measured air pressure 255 Pa at best efficiency point

(Pbep) Measured electric

180 W power input at best efficiency point (Wbep)

Nominal Power 6 W consumption of the light

system (WL)

Average illumination of 97 lux the light on the cooking

surface (Emiddle) Sound power level at 67 dB(A) highest setting (Lwa)

Electrical Connection

Plug Not present Frequency (Hz) 50-60 Hz **Electrical connection** 186 W Power supply cable 1500 mm

rating

220-240 V


SMEG SPA 27/07/2024

length



Optional accessories

Charcoal filter KITFC450

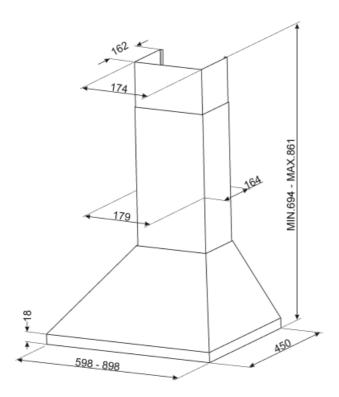

SMEG SPA 27/07/2024



Not included accessories

KITFC450

Charcoal filters ROUND Kit 2 pieces KDE600XE KDE900XE



SMEG SPA 27/07/2024



Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

SMEG SPA 27/07/2024