

KDE900EX

| | |
|-----------------------------|----------------------|
| Product family | Hood |
| Hood Type | Decorative wall hood |
| Design | Chimney |
| Extraction | Extraction |
| Material | Stainless steel |
| Type of steel | Brushed |
| EAN code | 8017709235161 |
| Hood width | 90 cm |
| Aesthetic | Universale |
| Colour | Stainless steel |
| Finishing | Satin |
| Components finishing | Stainless steel |
| Serigraphy colour | Black |
| Logo | Silk screen |



Controls

| | |
|------------------------|---------|
| Control setting | Buttons |
|------------------------|---------|

Program / Functions

| | |
|----------------------|---|
| No. of speeds | 3 |
|----------------------|---|

Technical Features



| | | | |
|--|----------|---|-----------|
| No. of lights | 2 | No. of filters | 3 |
| Light type | LED | Anti-grease filters | Aluminium |
| Light Power | 3 W | Vent outlet | 150 mm |
| Light color temperature scale (K) | 2700 K | Minimum distance from GAS hob | 700 mm |
| Free outlet maximum capacity | 588 m³/h | Minimum distance from ELECTRIC hob | 500 mm |
| Motor power | 180 W | Non return valve | Yes |

| | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|---------|---|---|
| Speed 1 | 202 | 42 |
| Speed 2 | 307 | 52 |

| | | |
|---------|-----|----|
| Speed 3 | 553 | 65 |
|---------|-----|----|

Accessories included

Tube reduction Yes

Performance / Energy Label


| | | | | |
|--|---|-----------|--|----------|
|   | Annual Efficiency Consumption (AEChood) | 103 kWh/a | Airbourne acoustical A- weighted sound Power | 44 dBA |
| Energy efficiency class (EEC) | D | | Emission at minimum speed (SPEmin) | |
| Fluid Dynamic Efficiency (FDE) | 12,6 | | Airborne acoustical A- weighted sound Power | 67 dBA |
| Fluid Dynamic Efficiency class (FDEC) | E | | Emission at maximum speed (SPEmax) | |
| Lighting Efficiency (LE) | 16,1 lux/W | | Time increase factor (F) | 1,5 |
| Lighting Efficiency Class (LEC) | C | | Measured air flow rate at best efficiency point (Qbep) | 320 m³/h |
| Grease Filtering Efficiency (GFE) | 76 % | | Measured air pressure at best efficiency point (Pbep) | 255 Pa |
| Grease Filtering Efficiency Class (GFEC) | C | | Measured electric power input at best efficiency point (Wbep) | 180 W |
| Air flow at minimum speed (Qmin) | 208 m³/h | | Nominal Power consumption of the light system (WL) | 6 W |
| Air flow at maximum speed (Qmax) | 559 m³/h | | Average illumination of the light on the cooking surface (Emiddle) | 97 lux |
| | | | Sound power level at highest setting (Lwa) | 67 dBA |

Electrical Connection

| | | | |
|------------------------------|-----------|---------------------------|-------------|
| Electrical connection rating | 186 W | Power supply cable length | 1500 mm |
| Voltage | 220-240 V | Plug | Not present |
| Frequency (Hz) | 50-60 Hz | | |

Optional accessories

Charcoal filter KITFC450

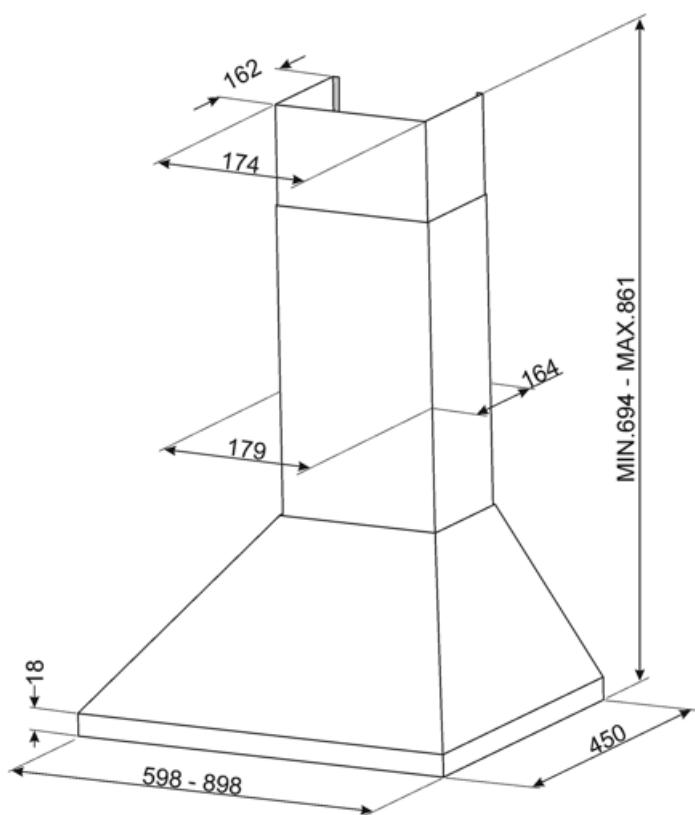



Compatible Accessories

KITFC450

Charcoal filters ROUND Kit 2 pieces



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.