

# KDH12WLD



**Product family**

Hood

**Hood Type**

Downdraft Cooker Hoods

**Design**

Fully integrated

**Extraction**

Ducted out or re-circulation possible

**Electronic control**

Yes

**Perimeter extraction**

Yes

**Material**

Glass

**EAN code**

8017709277826

**Hood width**

12 cm

**Aesthetics**

Universal

**Colour**

Black

**Finishing**

Glass

**Glass Type**

ceramic Eclipse

**Serigraphy colour**


White

**Logo**

Silk screen



## Controls



**Control setting**

Touch control

**Display**

Digital

**Led colour**

Ice

## Program / Functions

**No. of speeds**

3

**Intensive speed**



**Time-setting options**



## Technical Features



**Free outlet maximum capacity**

570 m<sup>3</sup>/h

**Anti-grease filters**

Stainless steel

**Motor power**

145 W

**Filter replacement indicator**

Yes

**No. of filters**

1

	<b>Extraction rate IEC 61591 [m<sup>3</sup>/h]</b>	<b>Noise level IEC 60704-2-13 [dBA]</b>
Speed 1	370	62
Speed 2	420	66

Speed 3	470	69
Intensive speed	550	72

## Accessories Included


Sliding door Yes

## Performance / Energy Label

Annual Efficiency Consumption (AEChood)	37 kWh/year	Airbourne acoustical A- weighted sound Power	62 dBA
Energy efficiency class ( EEC)	A+	Emission at minimum speed (SPEmin)	
Fluid Dynamic Efficiency (FDE)	32	Airborne acoustical A- weighted sound Power	69 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Emission at maximum speed (SPEmax)	
Lighting Efficiency Class (LEC)	NA	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	72 dBA
Grease Filtering Efficiency (GFE)	75,1 %	Time increase factor (F)	0,8
Grease Filtering Efficiency Class (GFEC)	C	Energy Efficiency Index per first cavity	43,4
Air flow at minimum speed (Qmin)	370 m <sup>3</sup> /h	Measured air flow rate at best efficiency point (Qbep)	295 m <sup>3</sup> /h
Maximum extraction rate	470 m <sup>3</sup> /h	Measured air pressure at best efficiency point (Qbep)	490 Pa
Intensive extraction rate	550 m <sup>3</sup> /h	Measured electric power input at best efficiency point (Wbep)	125 W
		Sound power level at highest setting (Lwa)	72 dBA

## Electrical Connection

Nominal power	145 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm

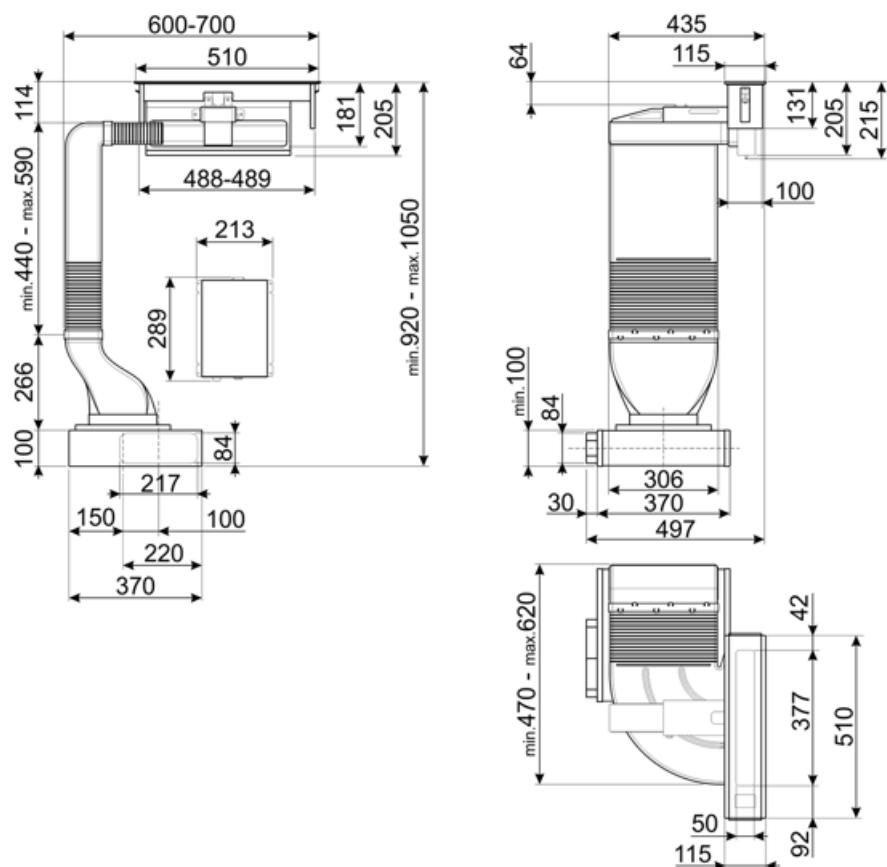

## Compatible Accessories



### CFKDH12HP

Ceramic filter for Domino Hood KDH12WLD Kit 1 piece High performances. Regenerable into oven Magnetic Metallic grid included.



### FLMSTPKDH12

Metallic flame guard hob aspiration hood Kit 1 piece



### CFKDH12STD

Charcoal filter for hob aspiration hood Kit 1 piece



### FLTKDH

Anti-Odour Filter Ceramic regenerable suitable for Recirculating kit (accessory CFKDH12HP)

### GRIDKDH12

Metallic grid for standard charcoal filter hob aspiration hood Kit 1 piece

## Symbols glossary



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**A+:** Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



**Warning light(s):** to advise when filters need changing.



**Touch controls:** Easy to use touch controls allow the appliance to be programmed at the touch of a button.



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**Electronic display:** to give a visual reminder of the options selected.



**Perimeter extraction panels:** very efficient and aid noise reduction.



**Intensive/turbo setting:** when extra fast extraction is required.