

# KDH12WLD



**Product family** Hood

**Hood Type Downdraft Cooker Hoods** 

Design Fully integrated

Extraction Ducted out or re-circulation possible

**Electronic control** Yes Perimeter extraction Yes Material Glass

EAN code 8017709277826

Hood width 12 cm **Aesthetics** Universal Colour Black **Finishing** Glass

Glass Type ceramic Eclipse

Serigraphy colour White Silk screen Logo



### **Controls**





**Control setting** Touch control

Led colour lce Display

Digital

# **Program / Functions**

No. of speeds Intensive speed

Time-setting options

## **Technical Features**





Free outlet maximum capacity

570 m<sup>3</sup>/h

Anti-grease filters

Stainless steel

Filter replacement Yes

indicator

Motor power No. of filters

145 W

1

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	370	62
Speed 2	420	66

**SMEG SPA** 25/11/2025



Speed 3	470	69
Intensive speed	550	72

### Accessories Included

Sliding door Yes

## Performance / Energy Label

<	A*	A"

**Annual Efficiency** 37 kWh/year Consumption (AEChood) Energy efficiency class ( A+ EEC) Fluid Dynamic Efficiency 32 (FDE) Fluid Dynamic Efficiency A class (FDEC) Lighting Efficiency Class NA (LEC) **Grease Filtering** 75.1 % Efficiency (GFE) **Grease Filtering** C Efficiency Class (GFEC) Air flow at minumum 370 m<sup>3</sup>/h speed (Qmin) Maximum extraction 470 m<sup>3</sup>/h rate Intensive extraction rate 550 m<sup>3</sup>/h

Airbourne acouistical A- 62 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-69 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 72 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) 0.8 **Energy Efficiency Index** 43.4 per first cavity Measured air flow rate 295 m<sup>3</sup>/h at best efficiency point (Qbep) Measured air pressure 490 Pa at best efficiency point (Qbep) Measured electric 125 W power input at best efficiency point (Wbep)

Sound power level at

highest setting (Lwa)


72 dBA


### **Electrical Connection**

Nominal power 145 W Frequency (Hz) 50-60 Hz Voltage 220-240 V Power supply cable 1500 mm length

**SMEG SPA** 25/11/2025





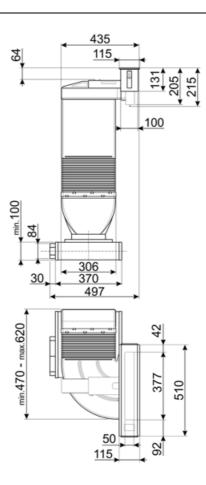

SMEG SPA 25/11/2025



# **Compatible Accessories**

### CFKDH12HP



Ceramic filter for Domino Hood KDH12WLD Kit 1 piece High performances. Regenerable into oven Magnetic Metallic grid included.

### FLMSTPKDH12



Metallic flame guard hob aspiration hood Kit 1 piece

#### **GRIDKDH12**

Metallic grid for standard charcoal filter hob aspiration hood Kit 1 piece

### CFKDH12STD



Charcoal filter for hob aspiration hood Kit 1 piece

#### **FLTKDH**



Anti-Odour Filter Ceramic regenerable suitable for Recirculating kit (accessory CFKDH12HP)

SMEG SPA 25/11/2025



## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Electronic display: to give a visual reminder of the options selected.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 25/11/2025