KDH12WLD



Product family	Hood
Hood Type	Downdraft Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709277826
Hood width	12 cm
Aesthetics	Universal
Colour	Black
Finishing	Glass
Glass Type	ceramic Eclipse
Serigraphy colour	White
Logo	Silk screen

Controls

Control setting	Touch control	**Display**	Digital
Led colour	Ice		

Program / Functions

No. of speeds	3
Intensive speed	BOOST
Time-setting options	

Technical Features

Free outlet maximum capacity	570 m³/h	**Anti-grease filters**	Stainless steel
Motor power	145 W	**Filter replacement indicator**	Yes
No. of filters	1		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	370	62
Speed 2	420	66

Speed 3	470	69
Intensive speed	550	72

Accessories Included

Sliding door	Yes

Performance / Energy Label




Annual Efficiency Consumption (AEChood)	37 kWh/year
Energy efficiency class (EEC)	A+
Fluid Dynamic Efficiency (FDE)	32
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency Class (LEC)	NA
Grease Filtering Efficiency (GFE)	75,1 %
Grease Filtering Efficiency Class (GFEC)	C
Air flow at minumum speed (Qmin)	370 m³/h
Maximum extraction rate	470 m³/h
Intensive extraction rate	550 m³/h

Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	62 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	69 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dBA
Time increase factor (F)	0,8
Energy Efficiency Index per first cavity	43,4
Measured air flow rate at best efficiency point (Qbep)	295 m³/h
Measured air pressure at best efficiency point (Qbep)	490 Pa
Measured electric power input at best efficiency point (Wbep)	125 W
Sound power level at highest setting (Lwa)	72 dBA

Electrical Connection

Nominal power	145 W
Voltage	220-240 V
Frequency (Hz)	50-60 Hz
Power supply cable length	1500 mm

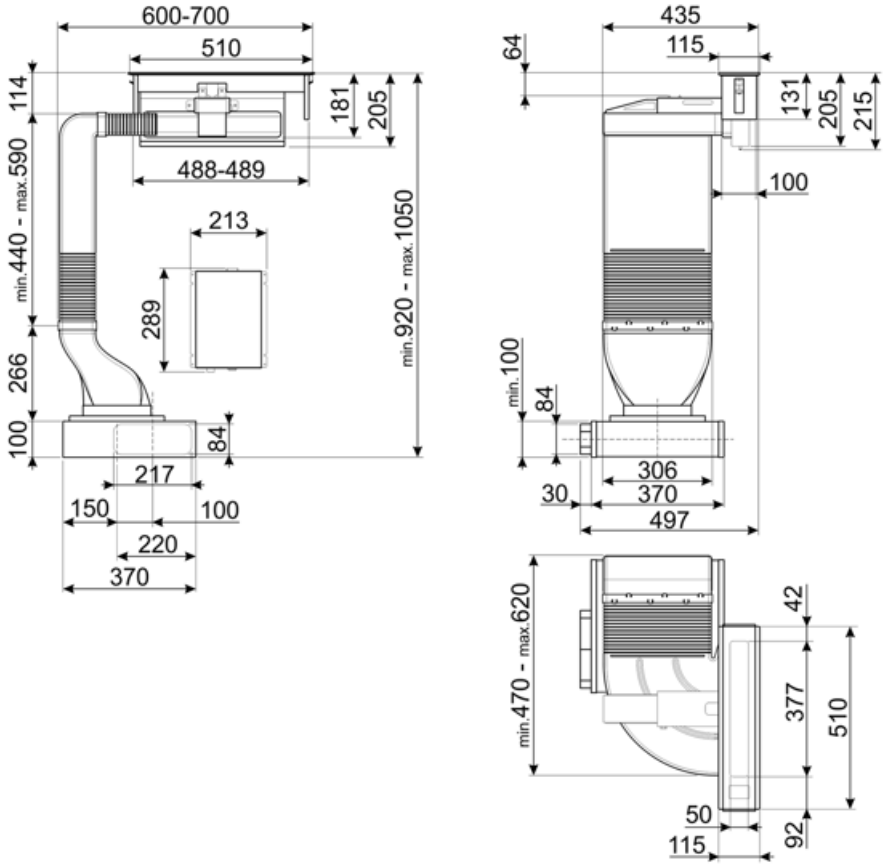
600-700
510
114
181
205
488-489
min.440 - max.590
213
289
min.920 - max.1050
266
100
84
217
150
100
220
370
435
115
64
131
205
215
100
min.100
84
306
30
370
497
min.470 - max.620
42
377
510
50
92
115

Compatible Accessories



CFKDH12HP

Ceramic filter for Domino Hood KDH12WLD Kit 1 piece High performances. Regenerable into oven Magnetic Metallic grid included.



FLMSTPKDH12

Metallic flame guard hob aspiration hood Kit 1 piece

GRIDKDH12


Metallic grid for standard charcoal filter hob aspiration hood Kit 1 piece



CFKDH12STD

Charcoal filter for hob aspiration hood Kit 1 piece

FLTKDH



Anti-Odour Filter Ceramic regenerable suitable for Recirculating kit (accessory CFKDH12HP)

Symbols glossary



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Electronic display: to give a visual reminder of the options selected.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.