

KDH12WLD



Product family	Hood
Hood Type	Downdraft Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709277826
Hood width	12 cm



Aesthetics

Aesthetics	Universal	Glass Type	ceramic Eclipse
Colour	Black	Serigraphy colour	White
Finishing	Glass	Logo	Silk screen

Controls



Control setting	Touch control	Display	Digital
Led colour	Ice		

Programs / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

Technical Features



Free outlet maximum capacity	570 m³/h	Anti-grease filters	Stainless steel
Motor power	145 W	Filter replacement indicator	Yes
No. of filters	1		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dB(A)]
Speed 1	370	62
Speed 2	420	66
Speed 3	470	69
Intensive speed	550	72

Accessories Included

Sliding door Yes

Performance / Energy Label

A+

Annual Efficiency Consumption (AEChood) 37 KWh/year

Energy efficiency class (EEC) A+

Fluid Dynamic Efficiency (FDE) 32

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency Class (LEC) NA

Grease Filtering Efficiency (GFE) 75,1 %

Grease Filtering Efficiency Class (GFEC) C

Air flow at minumum speed (Qmin) 370 m³/h

Maximum extraction rate 470 m³/h

Intensive extraction rate 550 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 62 dB(A)

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 69 dB(A)

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 72 dB(A)

Power Consumption in Off mode (Po) 0,49 W

Time increase factor (F) 0,8

Energy Efficiency Index per first cavity 43,4

Measured air flow rate at best efficiency point (Qbep) 295 m³/h

Measured air pressure at best efficiency point (Qbep) 490 Pa



Measured electric power input at best efficiency point (Wbep) 125 W

Sound power level at highest setting (Lwa) 72 dB(A)

Electrical Connection

Nominal power 145 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz
Power supply cable length 1500 mm

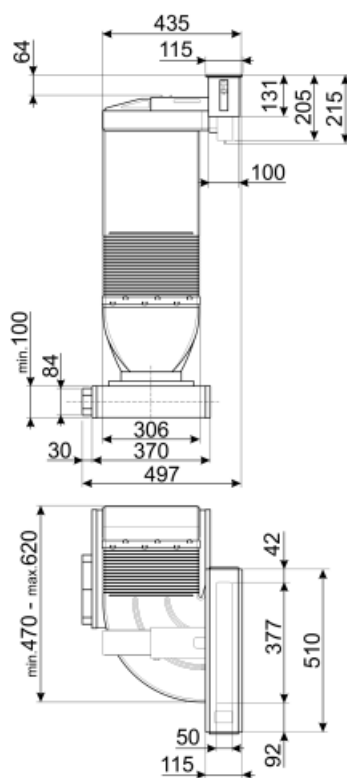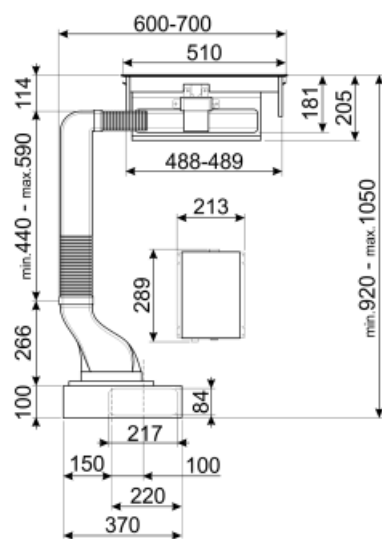

Not included accessories



CFKDH12STD

Charcoal filter for hob aspiration hood
Kit 1 piece



CFKDH12HP

Ceramic filter for Domino Hood
KDH12WLD Kit 1 piece High
performances. Regenerable into oven
Magnetic Metallic grid included.




FLMSTPKDH12

Metallic flame guard hob aspiration
hood Kit 1 piece

GRIDKDH12

Metallic grid for standard charcoal
filter hob aspiration hood Kit 1 piece



FLTKDH

Anti-Odour Filter Ceramic regenerable
suitable for Recirculating kit
(accessory CFKDH12HP)

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Electronic display: to give a visual reminder of the options selected.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Intensive/turbo setting: when extra fast extraction is required.