

KDH12WLD



Product family

Hood

Hood Type

DownDraft

Design

Fully integrated

Extraction

Extraction

Electronic control

Yes

Perimeter extraction

Yes

Material

Glass

EAN code

8017709277826

Hood width

12 cm

Aesthetic

Universale

Colour

Black

Finishing

Glass

Glass Type

ceramic Eclipse

Serigraphy colour


White

Logo

Silk screen



Controls



Control setting

Touch control

Display

Digital

Led color

Ice

Program / Functions

No. of speeds

3

Intensive speed



Time-setting options



Technical Features



Free outlet maximum capacity

570 m³/h

Anti-grease filters

Stainless steel

Motor power

145 W

Filter replacement indicator

Yes

No. of filters

1

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	370	62
Speed 2	420	66

Speed 3	470	69
Intensive speed	550	72

Accessories included


Motorised opening Yes

Performance / Energy Label

Annual Efficiency Consumption (AEChood)	37 kWh/a	Airbourne acoustical A- weighted sound Power	62 dBA
Energy efficiency class (EEC)	A+	Emission at minimum speed (SPEmin)	
Fluid Dynamic Efficiency (FDE)	32	Airborne acoustical A- weighted sound Power	69 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Emission at maximum speed (SPEmax)	
Lighting Efficiency Class (LEC)	NA	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	72 dBA
Grease Filtering Efficiency (GFE)	75,1 %	Time increase factor (F)	0,8
Grease Filtering Efficiency Class (GFEC)	C	Energy Efficiency Index	43,4
Air flow at minimum speed (Qmin)	370 m³/h	Measured air flow rate at best efficiency point (Qbep)	295 m³/h
Air flow at maximum speed (Qmax)	470 m³/h	Measured air pressure at best efficiency point (Pbep)	490 Pa
Air flow at boost speed (Qboost)	550 m³/h	Measured electric power input at best efficiency point (Wbep)	125 W
		Sound power level at highest setting (Lwa)	72 dBA

Electrical Connection

Electrical connection rating	145 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm

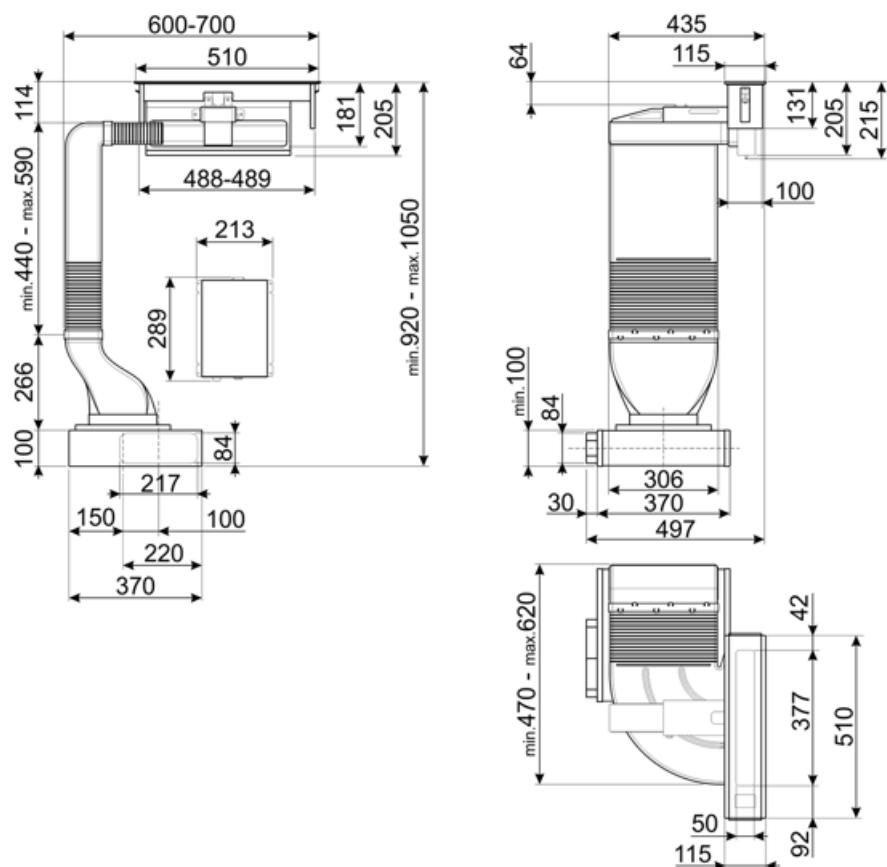

Compatible Accessories



CFKDH12HP

Ceramic filter for Domino Hood KDH12WLD Kit 1 piece High performances. Regenerable into oven Magnetic Metallic grid included.



FLMSTPKDH12

Metallic flame guard hob aspiration hood Kit 1 piece



CFKDH12STD

Charcoal filter for hob aspiration hood Kit 1 piece



FLTKDH

Anti-Odour Filter Ceramic regenerable suitable for Recirculating kit (accessory CFKDH12HP)

GRIDKDH12

Metallic grid for standard charcoal filter hob aspiration hood Kit 1 piece

Symbols glossary

 A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.	 Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
 Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.	 Electronic display: to give a visual reminder of the options selected.
 Warning light(s): to advise when filters need changing.	 Perimeter extraction panels: very efficient and aid noise reduction.
 Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.	 Intensive/turbo setting: when extra fast extraction is required.