

# KDH12WLD



|                      |                  |
|----------------------|------------------|
| Product family       | Hood             |
| Hood Type            | DownDraft        |
| Design               | Fully integrated |
| Extraction           | Extraction       |
| Electronic control   | Yes              |
| Perimeter extraction | Yes              |
| Material             | Glass            |
| EAN code             | 8017709277826    |
| Hood width           | 12 cm            |



## Aesthetics

|           |            |                   |                 |
|-----------|------------|-------------------|-----------------|
| Aesthetic | Universale | Glass Type        | ceramic Eclipse |
| Colour    | Black      | Serigraphy colour | White           |
| Finishing | Glass      | Logo              | Silk screen     |

## Controls



|                 |               |         |         |
|-----------------|---------------|---------|---------|
| Control setting | Touch control | Display | Digital |
| Led color       | Ice           |         |         |

## Programme / Functions

|                      |                                                                                     |
|----------------------|-------------------------------------------------------------------------------------|
| No. of speeds        | 3                                                                                   |
| Intensive speed      |  |
| Time-setting options |  |

## Technical Features



|                              |                       |                              |                 |
|------------------------------|-----------------------|------------------------------|-----------------|
| Free outlet maximum capacity | 570 m <sup>3</sup> /h | Anti-grease filters          | Stainless steel |
| Motor power                  | 145 W                 | Filter replacement indicator | Yes             |
| No. of filters               | 1                     |                              |                 |

|                 | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dB(A)] |
|-----------------|----------------------------------|------------------------------------|
| Speed 1         | 370                              | 62                                 |
| Speed 2         | 420                              | 66                                 |
| Speed 3         | 470                              | 69                                 |
| Intensive speed | 550                              | 72                                 |

## Accessories Included

Motorised opening      Yes




## Performance / Energy Label



|                                          |          |                                                                                |          |
|------------------------------------------|----------|--------------------------------------------------------------------------------|----------|
| Annual Efficiency Consumption (AEChood)  | 37 kWh/a | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 62 dB(A) |
| Energy efficiency class (EEC)            | A+       | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 69 dB(A) |
| Fluid Dynamic Efficiency (FDE)           | 32       | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 72 dB(A) |
| Fluid Dynamic Efficiency class (FDEC)    | A        | Power Consumption in Off mode (Po)                                             | 0,49 W   |
| Lighting Efficiency Class (LEC)          | NA       | Time increase factor (F)                                                       | 0,8      |
| Grease Filtering Efficiency (GFE)        | 75,1 %   | Energy Efficiency Index                                                        | 43,4     |
| Grease Filtering Efficiency Class (GFEC) | C        | Measured air flow rate at best efficiency point (Qbep)                         | 295 m³/h |
| Air flow at minumum speed (Qmin)         | 370 m³/h | Measured air pressure at best efficiency point (Pbep)                          | 490 Pa   |
| Air flow at maximum speed (Qmax)         | 470 m³/h | Measured electric power input at best efficiency point (Wbep)                  | 125 W    |
| Air flow at boost speed (Qboost)         | 550 m³/h | Sound power level at highest setting (Lwa)                                     | 72 dB(A) |

## Electrical Connection

|                              |           |                           |          |
|------------------------------|-----------|---------------------------|----------|
| Electrical connection rating | 145 W     | Frequency (Hz)            | 50-60 Hz |
| Voltage                      | 220-240 V | Power supply cable length | 1500 mm  |

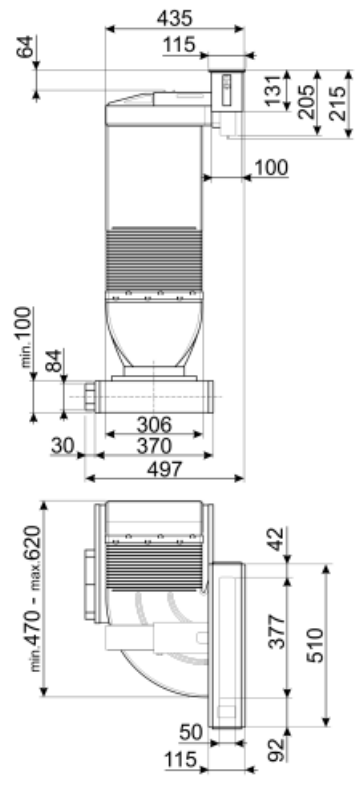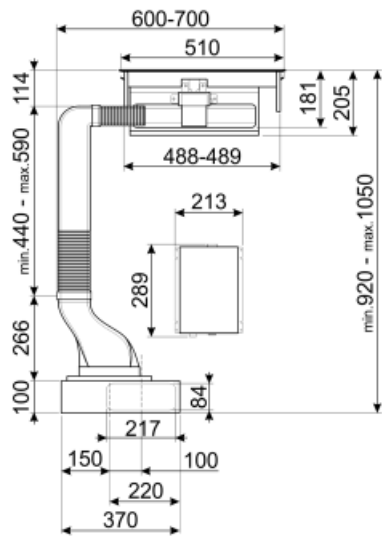

---

## Not included accessories

---

### CFKDH12STD

Charcoal filter for hob aspiration hood  
Kit 1 piece



### CFKDH12HP

Ceramic filter for Domino Hood  
KDH12WLD Kit 1 piece High  
performances. Regenerable into oven  
Magnetic Metallic grid included.



### FLMSTPKDH12

Metallic FLAME FRANGES hob  
aspiration hood Kit 1 piece




### GRIDKDH12

Metallic grid for standard charcoal  
filter hob aspiration hood Kit 1 piece

### FLTKDH









Anti-Odour Filter Ceramic regenerable  
suitable for Recirculating kit  
(accessory CFKDH12HP)



---

## Symbols glossary (TT)

---

|                                                                                  |                                                                                                                                                |                                                                                   |                                                                                                         |
|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
|  | A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.             |  | Electronic display: to give a visual reminder of the options selected.                                  |
|  | Warning light(s): to advise when filters need changing.                                                                                        |  | Perimeter extraction panels: very efficient and aid noise reduction.                                    |
|  | Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.                                      |  | Intensive/turbo setting: when extra fast extraction is required.                                        |