

KDH12WLD



Product family
Hood
Type
DownDraft
Design
Fully integrated
Extraction
Electronic control
Yes

Electronic control Yes
Perimeter extraction Yes
Material Glass

EAN code 8017709277826

Hood width 12 cm



Aesthetics

AestheticUniversaleGlass Typeceramic EclipseColourBlackSerigraphy colourWhite

ColourBlackSerigraphy colourWhiteFinishingGlassLogoSilk screen

Controls

9 [88]

Control setting Touch control Display Digital

Led color lce

Programme / Functions

No. of speeds Intensive speed

Time-setting options

Technical Features



Free outlet maximum 570 m³/h

capacity

Motor power 145 W No. of filters 1 Anti-grease filters Filter replacement indicator Stainless steel

lacement Yes



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	370	62
Speed 2	420	66
Speed 3	470	69
Intensive speed	550	72

Accessories Included

Motorised opening Yes

Performance / Energy Label

_		tr
/	Λ.	Ť
		Ď

Annual Efficiency 37 kWh/a Airbourne acouistical A- 62 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A+ speed (SPEmin) (EEC) Airborne acoustical A-69 dBA Fluid Dynamic Efficiency 32 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 72 dBA Lighting Efficiency Class NA weighted sound power (LEC) emission at boost speed **Grease Filtering** 75.1 % (SPEboost) Efficiency (GFE) Power Consumption in 0.49 W **Grease Filtering** C Off mode (Po) Efficiency Class (GFEC) Time increase factor (F) Air flow at minumum 370 m³/h **Energy Efficiency Index** speed (Qmin) Measured air flow rate 295 m³/h Air flow at maximum 470 m³/h at best efficiency point speed (Qmax) (Qbep) Air flow at boost speed 550 m³/h Measured air pressure 490 Pa (Qboost) at best efficiency point (Pbep) Measured electric 125 W power input at best efficiency point (Wbep) Sound power level at 72 dBA


Electrical Connection


Electrical connection 145 W Frequency (Hz) 50-60 Hz rating Power supply cable 1500 mm 220-240 V Voltage length

SMEG SPA 15/12/2024

highest setting (Lwa)





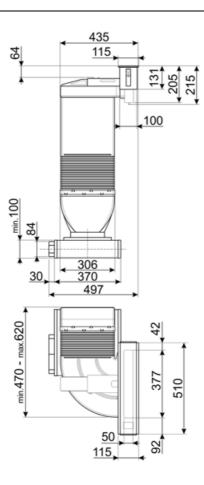



Not included accessories

CFKDH12STD

Charcoal filter for hob aspiration hood Kit 1 piece

CFKDH12HP

Ceramic filter for Domino Hood KDH12WLD Kit 1 piece High performances. Regenerable into oven Magnetic Metallic grid included.

FLMSTPKDH12

Metallic FLAME FRANGES hob aspiration hood Kit 1 piece

GRIDKDH12

Metallic grid for standard charcoal filter hob aspiration hood Kit 1 piece

FLTKDH

Anti-Odour Filter Ceramic regenerable suitable for Recirculating kit (accessory CFKDH12HP)





Symbols glossary (TT)



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Electronic display: to give a visual reminder of the options selected.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Intensive/turbo setting: when extra fast extraction is required.