

KDH12WLD



Product family	Hood
Tipo de Exaustor	Fully Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709277826
Hood width	
Aesthetic	Universal
Colour	Black
Acabamento	Glass
Glass Type	eclipse cerâmico
Cor da serigrafia	Serigrafia em branco
Logotipo	Logotipo serigrafado



Controls



Control setting	Touch control	Display	Digital
Led color	Ice		

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	No
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	No

Technical Features



Hood without motor	No	Anti-grease filters	Stainless steel
Remote motor	No	Charcoal filters included	No
Free outlet maximum capacity	570 m³/h	Filter replacement indicator	Yes
Motor power	145 W	Non return valve	No
No. of filters	1		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	370	62
Speed 2	420	66
Speed 3	470	69
Intensive speed	550	72

Accessories Included

Remote control	No	Tube reduction	No
Sliding door	Yes		

Performance / Energy Label



Consumo anual de energia (CAE exaustor) 37 kWh/a

Energy efficiency class (EEC) A+

Fluid Dynamic Efficiency (FDE) 32

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency Class (LEC) NA

Grease Filtering Efficiency (GFE) 75,1 %

Grease Filtering Efficiency Class (GFEC) C

Air flow at minumum speed (Qmin) 370 m³/h

Air flow at maximum speed (Qmax) 470 m³/h

Air flow at boost speed (Qboost) 550 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 62 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 69 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 72 dBA

Time increase factor (F) 0,8

Energy Efficiency Index 43,4

Measured air flow rate at best efficiency point (Qbep) 295 m³/h

Measured air pressure at best efficiency point (Pbep) 490 Pa



Measured electric power input at best efficiency point (Wbep) 125 W

Sound power level at highest setting (Lwa) 72 dBA

Electrical Connection

Electrical connection rating 145 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz
Comprimento do cabo de alimentação 1500 mm

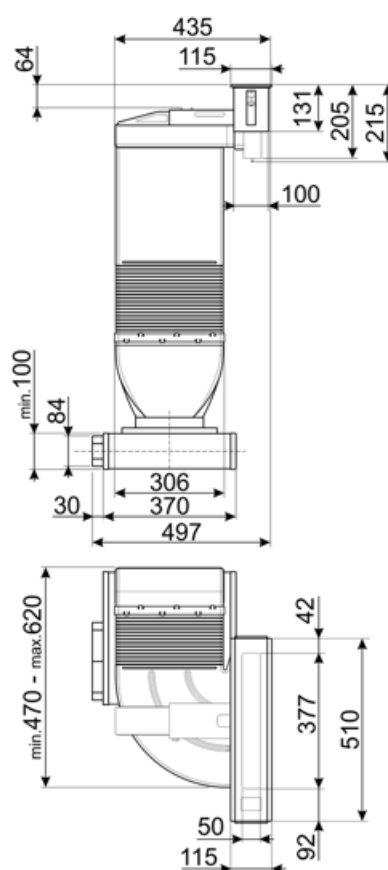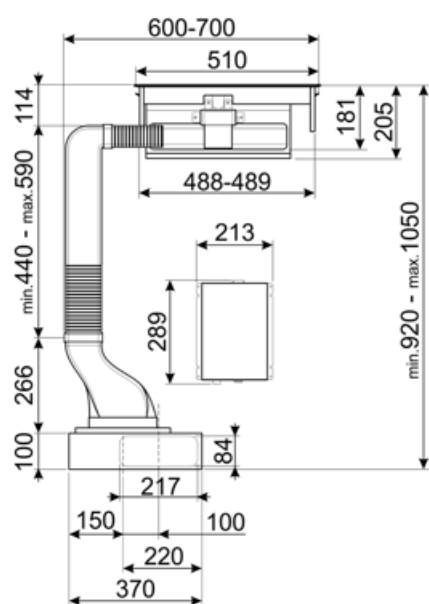

Compatible Accessories



CFKDH12HP

Filtro cerâmico para exaustor Domino KDH12WLD Kit 1 peça Alto desempenho. Regenerável no forno Grade metálica magnética incluída.



FLMSTPKDH12

CHAMA metálico FRANGES placa exaustor aspiração Kit 1 peça


GRIDKDH12

Grade metálica para filtro de carvão padrão exaustor aspiração para placa Kit 1 peça



CFKDH12STD

Filtro de carvão para exaustor de aspiração de placa Kit 1 peça



FLTKDH

Anti-Odor Filtro de cerâmica regenerável adequado para kit de recirculação (acessório CFKDH12HP)

Symbols glossary



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



A+: A classe de eficiência energética A+ ajuda a economizar até 10% de energia em comparação com a classe A. O desempenho máximo com consumo mínimo é garantido.



Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.



Controles táteis: Os controles táteis, fáceis de usar, permitem que o aparelho seja programado com o toque de um botão.



Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.



Visor eletrônico: para exibir um lembrete visual das opções selecionadas.



Painéis de extração de perímetro: muito eficiente e ajuda na redução de ruído.



Configuração intensiva/turbo: quando a extração extra rápida é necessária.

Benefit (TT)

Dimmering & Tunable lights

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones

Perimetral aspiration

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture