

KDIAM90AX

Product family	Hood
Hood Type	Canopy Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709217082
Hood width	90 cm
Aesthetics	Universal
Colour	Stainless steel
Finishing	Brushed
Logo	Embossed



Controls

Control setting	Electronic buttons	Led colour	White
-----------------	--------------------	------------	-------

Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

Technical Features




No. of lights	4	Anti-grease filters	Baffle
Light type	LED	Filter replacement indicator	Yes
Light power	1 W	Vent outlet	150 mm
Light colour temperature scale (K)	3000 K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	1400 m ³ /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	550 W	Non return valve	Yes
No. of filters	2		

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	552	46

Speed 2	950	63
Speed 3	1412	71
Intensive speed	1555	74


Electrical Connection

Nominal power	555 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	(I) Australia
Frequency (Hz)	50-60 Hz		

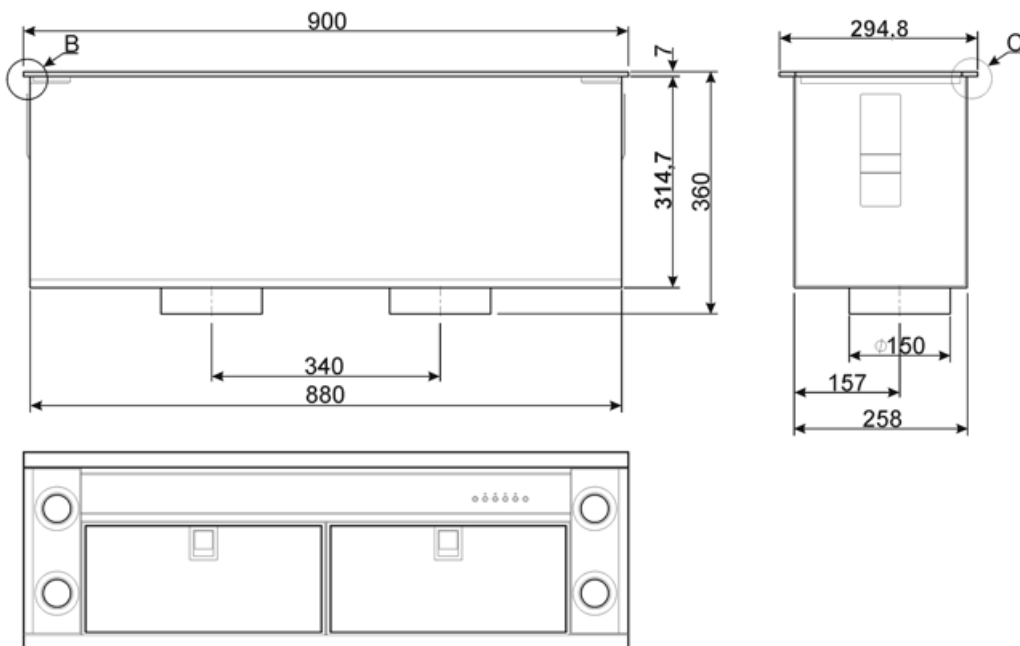

Compatible Accessories

AIRKITDIAM



air conveyor kit from the two hood motors in a single outlet with a diameter of 200 mm (the motors come out at 150 mm)

FLT6



Round Charcoal filters (kit 2 pieces)

Symbols glossary

- | | | | |
|--|---|---|--|
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Warning light(s): to advise when filters need changing. |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |
|  | Intensive/turbo setting: when extra fast extraction is required. | | |