

# KFAB75BL

Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	Angled
Extraction	Re-circulation only
Electronic control	Yes
Material	Painted material
Type of steel	Brushed
EAN code	8017709224868
Aesthetics	50's Style
Colour	Black
Finishing	Gloss
Logo	Applied



## Controls

Control setting	Electronic buttons	Led colour	White
-----------------	--------------------	------------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features



No. of lights	2	Anti-grease filters	Stainless steel
Light type	LED	Charcoal filters included	Yes
Light power	1 W	Filter replacement indicator	Yes
Light colour	4000 °K	Vent outlet	150 mm
temperature scale (°K)		Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	280 W	Non return valve	Yes
No. of filters	3		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	333	50

Speed 2	477	59
Speed 3	649	67
Intensive speed	797	72

## Accessories Included

Remote control	Yes	Sliding door	Yes
----------------	-----	--------------	-----

## Performance / Energy Label



Annual Efficiency Consumption (AEChood) 36 KWh/year

Energy efficiency class (EEC) A+

Fluid Dynamic Efficiency (FDE) 36.6

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 68.2 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 61.1 %

Grease Filtering Efficiency Class (GFEC) E

Air flow at mininum speed (Qmin) 333 m³/h

Maximum extraction rate 649 m³/h

Intensive extraction rate 797 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 50 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 67 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 72 dBA

Time increase factor (F) 0.7

Energy Efficiency Index per first cavity 39.7

Measured air flow rate at best efficiency point (Qbep) 421 m³/h

Measured air pressure at best efficiency point (Qbep) 422 Pa

Measured electric power input at best efficiency point (Wbep) 135 W

Normal Power of the light system (WI) 2 W

Average illumination of the light on the cooking surface (Emiddle) 150 lux

Sound power level at highest setting (Lwa) 67 dBA

## Electrical Connection

Battery type Alkaline-Manganese Dioxide (Zn/MnO<sub>2</sub>)

Nominal power 282 W

Current 1 A

Voltage 220-240 V

Frequency (Hz) 50-60 Hz

Power supply cable length 1500 mm



## Also available

Alternative colours  
available

White, Cream, Blue, Red

Available colours

KFAB75WH-KFAB75CR-  
KFAB75UJ-KFAB75RD

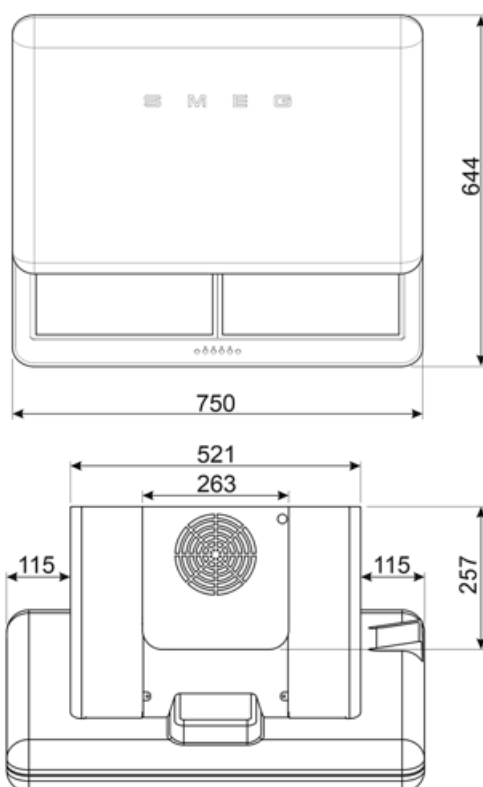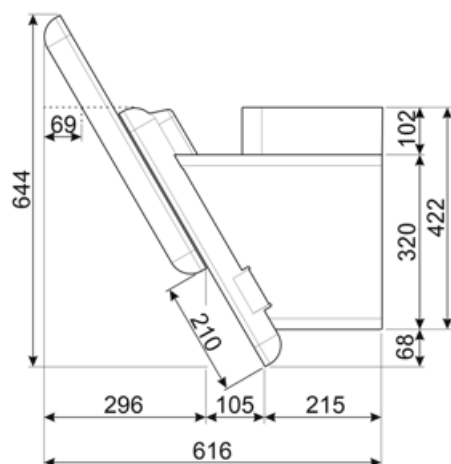


---

## Compatible Accessories

---

### FLTSI

Charcoal filters Kit 2 pieces



### KITCMNFABBL

Coppia di Camini (2 pezzi) dimensioni  
550 min 1035 max (263 \* 257 mm)  
KFAB75BL NERA



---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Charcoal filters:** Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



**Warning light(s):** to advise when filters need changing.



**Intensive/turbo setting:** when extra fast extraction is required.



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**A+: Energy efficiency class A+** helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.