

KFAB75BL

| | |
|--------------------|----------------------|
| Product family | Hood |
| Hood Type | Decorative wall hood |
| Design | Angled |
| Extraction | Recirculation |
| Electronic control | Yes |
| Material | Painted material |
| Type of steel | Brushed |
| EAN code | 8017709224868 |
| Hood width | 75 cm |




Aesthetics

| | | | |
|------------------|------------------|----------------|----------------|
| Aesthetic Colour | 50's Style Black | Finishing Logo | Glossy Applied |
|------------------|------------------|----------------|----------------|





Controls

| | | | |
|-----------------|--------------------|-----------|-------|
| Control setting | Electronic buttons | Led color | White |
|-----------------|--------------------|-----------|-------|

Programme / Functions

| | |
|----------------------|---|
| No. of speeds | 3 |
| Intensive speed |  |
| Time-setting options |  |

Technical Features

| | | | | | | | |
|--|---|---|---|------------------------------------|-----------------------|-------------------------------|-----------------|
|  |  |  |  | No. of lights | 2 | Anti-grease filters | Stainless steel |
| | | | | Light type | LED | Charcoal filters included | Yes |
| | | | | Light Power | 1 W | Filter replacement indicator | Yes |
| | | | | Light color temperature scale (°K) | 4000 °K | Vent outlet | 150 mm |
| | | | | Free outlet maximum capacity | 820 m ³ /h | Minimum distance from GAS hob | 650 mm |
| | | | | Motor power | 280 W | | |

| | | | |
|----------------|---|------------------------------------|--------|
| No. of filters | 3 | Minimum distance from ELECTRIC hob | 650 mm |
| | | Non return valve | Yes |

| | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dB(A)] |
|-----------------|----------------------------------|------------------------------------|
| Speed 1 | 333 | 50 |
| Speed 2 | 477 | 59 |
| Speed 3 | 649 | 67 |
| Intensive speed | 797 | 72 |

Accessories Included

| | | | |
|----------------|-----|-------------------|-----|
| Remote control | Yes | Motorised opening | Yes |
|----------------|-----|-------------------|-----|

Performance / Energy Label



| | | | |
|---|------------|---|----------|
| Annual Efficiency Consumption (AEC _{hood}) | 36 kWh/a | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE _{max}) | 67 dB(A) |
| Energy efficiency class (EEC) | A+ | Airbourne acoustical A-weighted sound power emission at boost speed (SPE _{boost}) | 72 dB(A) |
| Fluid Dynamic Efficiency (FDE) | 36,6 | Power consumption in stand-by mode (Ps) | 0,49 W |
| Fluid Dynamic Efficiency class (FDEC) | A | Time increase factor (F) | 0,7 |
| Lighting Efficiency (LE) | 68,2 lux/W | Energy Efficiency Index | 39,7 |
| Lighting Efficiency Class (LEC) | A | Measured air flow rate at best efficiency point (Q _{bep}) | 421 m³/h |
| Grease Filtering Efficiency (GFE) | 61,1 % | Measured air pressure at best efficiency point (P _{bep}) | 422 Pa |
| Grease Filtering Efficiency Class (GFEC) | E | Measured electric power input at best efficiency point (W _{bep}) | 135 W |
| Air flow at minimum speed (Q _{min}) | 333 m³/h | Nominal Power consumption of the light system (WL) | 2 W |
| Air flow at maximum speed (Q _{max}) | 649 m³/h | Average illumination of the light on the cooking surface (E _{middle}) | 150 lux |
| Air flow at boost speed (Q _{boost}) | 797 m³/h | Sound power level at highest setting (L _{wa}) | 67 dB(A) |
| Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPE _{min}) | 50 dB(A) | | |

Electrical Connection

| | | | |
|------------------------------|-------------|---------------------------|-----------|
| Plug | Not present | Voltage | 220-240 V |
| Electrical connection rating | 282 W | Frequency (Hz) | 50-60 Hz |
| Current | 1 A | Power supply cable length | 1500 mm |




Also available

Alternative colours available

White, Cream, Blue, Red

Available colours

KFAB75WH-KFAB75CR-KFAB75UJ-KFAB75RD

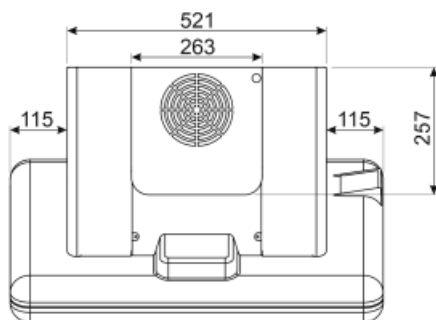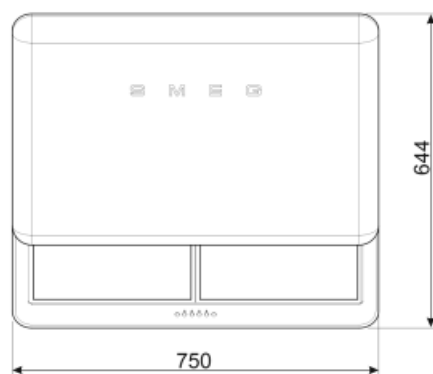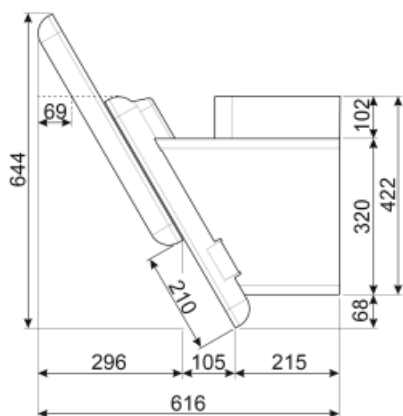

Not included accessories



KITCMNFABBL

Coppia di Camini (2 pezzi) dimensioni
550 min 1035 max (263 * 257 mm)
KFAB75BL NERA



FLTSI

Charcoal filters Kit 2 pieces

Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.