

KFAB75BL



| | |
|----------------------|----------------------|
| Product family | Hood |
| Tipo de Exaustor | Decorative wall hood |
| Design | Angled |
| Extraction | Recirculation |
| Electronic control | Yes |
| Perimeter extraction | No |
| Material | Painted material |
| Type of steel | Brushed |
| EAN code | 8017709224868 |
| Aesthetic | Estilo anos '50 |
| Colour | Black |
| Acabamento | Brilhante |
| Logotipo | Logotipo aplicado |



Controls

| | | | |
|-----------------|--------------------|-----------|-------|
| Control setting | Electronic buttons | Led color | White |
|-----------------|--------------------|-----------|-------|

Program / Functions

| | |
|-------------------------|---|
| No. of speeds | 3 |
| Intensive speed |  |
| 24h air filter function | No |
| Other functions | No |
| Time-setting options |  |
| Other options | No |
| Ventilação automática | No |

Technical Features



| | | | |
|---|-----------------------|------------------------------------|-----------------|
| Hood without motor | No | No. of filters | 3 |
| Remote motor | No | Anti-grease filters | Stainless steel |
| No. of lights | 2 | Charcoal filters included | Yes |
| Light type | LED | Filter replacement indicator | Yes |
| Light Power | 1 W | Vent outlet | 150 mm |
| Dimmer mode | No | Minimum distance from GAS hob | 650 mm |
| Escala de temperatura de cor clara (°K) | 4000 °K | Minimum distance from ELECTRIC hob | 650 mm |
| Free outlet maximum capacity | 820 m ³ /h | | |

Motor power 280 W Non return valve Yes

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|---|----------------------------------|
| Speed 1 | 333 | 50 |
| Speed 2 | 477 | 59 |
| Speed 3 | 649 | 67 |
| Intensive speed | 797 | 72 |

Accessories Included

Remote control Yes Tube reduction No
Sliding door Yes

Performance / Energy Label



| | | | |
|--|-----------------------|--|-----------------------|
| Consumo anual de energía (CAE exaustor) | 36 kWh/a | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 67 dBA |
| Energy efficiency class (EEC) | A+ | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 72 dBA |
| Fluid Dynamic Efficiency (FDE) | 36,6 | Power consumption in stand-by mode (Ps) | 0,49 W |
| Fluid Dynamic Efficiency class (FDEC) | A | Time increase factor (F) | 0,7 |
| Lighting Efficiency (LE) | 68,2 lux/W | Energy Efficiency Index | 39,7 |
| Lighting Efficiency Class (LEC) | A | Measured air flow rate at best efficiency point (Qbep) | 421 m ³ /h |
| Grease Filtering Efficiency (GFE) | 61,1 % | Measured air pressure at best efficiency point (Pbep) | 422 Pa |
| Grease Filtering Efficiency Class (GFEC) | E | Measured electric power input at best efficiency point (Wbep) | 135 W |
| Air flow at mininum speed (Qmin) | 333 m ³ /h | Nominal Power consumption of the light system (WL) | 2 W |
| Air flow at maximum speed (Qmax) | 649 m ³ /h | Average illumination of the light on the cooking surface (Emiddle) | 150 lux |
| Air flow at boost speed (Qboost) | 797 m ³ /h | Sound power level at highest setting (Lwa) | 67 dBA |
| Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 50 dBA | | |

Electrical Connection

Plug No Voltage 220-240 V



| | | | |
|-------------------------------------|--|---|----------|
| Battery type | Alkaline-Manganese Dioxide (Zn/MnO ₂) | Frequency (Hz) | 50-60 Hz |
| Electrical connection rating | 282 W | Comprimento do cabo de alimentação | 1500 mm |
| Current | 1 A | | |

Also available

Outras cores disponíveis Branca, Creme, Azul, Encarnada

Códigos das outras cores disponíveis


KFAB75WH-KFAB75CR-KFAB75UJ-KFAB75RD

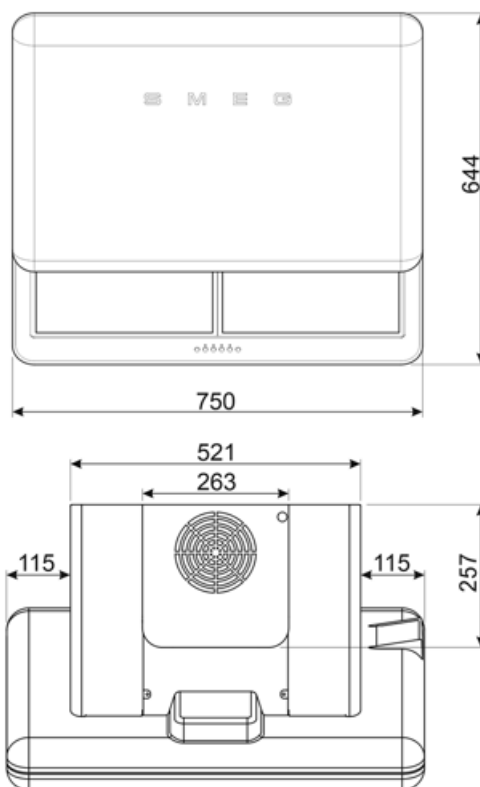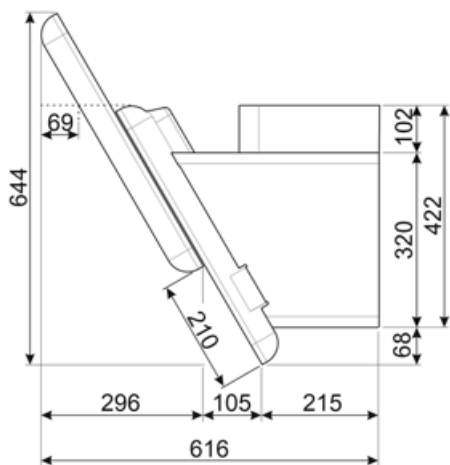

Compatible Accessories

FLTSI

Kit de filtros de carvão 2 peças



KITCMNFABBL

Par de chaminés (2 peças) dimensões
550 mín 1035 máx (263 * 257 mm)
KFAB75BL PRETO



Symbols glossary



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



Filtros de carvão: Extrair através de filtros de carvão ou diretamente para o exterior diminui consideravelmente os fortes odores de cozimento.



Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.



Configuração intensiva/turbo: quando a extração extra rápida é necessária.



Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.



A+: A classe de eficiência energética A+ ajuda a economizar até 10% de energia em comparação com a classe A. O desempenho máximo com consumo mínimo é garantido.



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.