

# KFAB75BL

Product family	Hood
Tipo de Exaustor	Decorative wall hood
Design	Angled
Extraction	Recirculation
Electronic control	Yes
Perimeter extraction	No
Material	Painted material
Type of steel	Brushed
EAN code	8017709224868
Aesthetic	Estilo anos '50
Colour	Black
Acabamento	Brilhante
Logotipo	Logotipo aplicado




## Controls

Control setting	Electronic buttons	Led color	White
-----------------	--------------------	-----------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	No
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	No

## Technical Features



Hood without motor	No	No. of filters	3
Remote motor	No	Anti-grease filters	Stainless steel
No. of lights	2	Charcoal filters included	Yes
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Dimmer mode	No	Minimum distance from GAS hob	650 mm
Escala de temperatura de cor clara (°K)	4000 °K	Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	820 m <sup>3</sup> /h		

Motor power 280 W Non return valve Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	333	50
Speed 2	477	59
Speed 3	649	67
Intensive speed	797	72

## Accessories Included

Remote control Yes Tube reduction No  
Sliding door Yes

## Performance / Energy Label



Consumo anual de energía (CAE exaustor)	36 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	50 dBA
Energy efficiency class (EEC)	A+	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Fluid Dynamic Efficiency (FDE)	36,6	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,7
Lighting Efficiency (LE)	68,2 lux/W	Energy Efficiency Index	39,7
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	421 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	61,1 %	Measured air pressure at best efficiency point (Pbep)	422 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	135 W
Air flow at minumum speed (Qmin)	333 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	649 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	150 lux
Air flow at boost speed (Qboost)	797 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	67 dBA

## Electrical Connection



<b>Plug</b>	No	<b>Voltage</b>	220-240 V
<b>Battery type</b>	Alkaline-Manganese Dioxide (Zn/MnO <sub>2</sub> )	<b>Frequency (Hz)</b>	50-60 Hz
<b>Electrical connection rating</b>	282 W	<b>Comprimento do cabo de alimentação</b>	1500 mm
<b>Current</b>	1 A		

## Also available

**Outras cores disponíveis** Branca, Creme, Azul, Encarnada

**Códigos das outras cores disponíveis**

KFAB75WH-KFAB75CR-KFAB75UJ-KFAB75RD

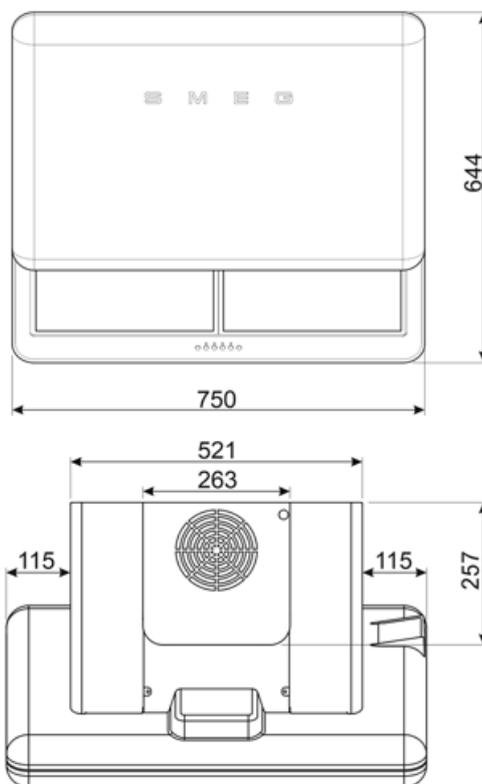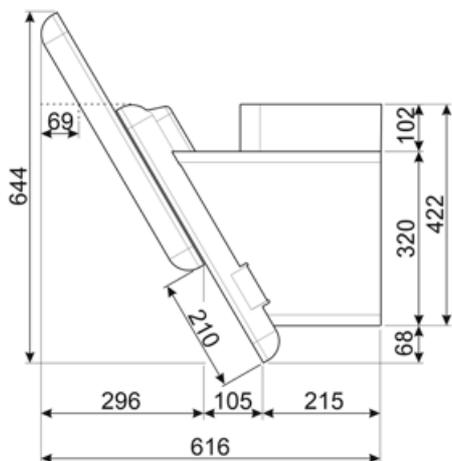

---

## Compatible Accessories

---

**FLTSI**

Kit de filtros de carvão 2 peças



**KITCMNFABBL**

Par de chaminés (2 peças) dimensões  
550 mín 1035 máx (263 \* 257 mm)  
KFAB75BL PRETO



## Symbols glossary



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.



A+: A classe de eficiência energética A+ ajuda a economizar até 10% de energia em comparação com a classe A. O desempenho máximo com consumo mínimo é garantido.



Filtros de carvão: Extrair através de filtros de carvão ou diretamente para o exterior diminui consideravelmente os fortes odores de cozimento.



Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.



Configuração intensiva/turbo: quando a extração extra rápida é necessária.