

# KFAB75CR

**Product family** Hood

**Hood Type** Decorative wall hood

Design Angled Recirculation Extraction

**Electronic control** Yes

Painted material Material

Type of steel Brushed

EAN code 8017709224875

Hood width 75 cm **Aesthetic** 50's Style Colour Cream **Finishing** Glossy Logo Applied



### **Controls**

Led color White Control setting Electronic buttons

## **Program / Functions**

No. of speeds Intensive speed

Time-setting options



### **Technical Features**









No. of lights 2

Light type **LED** Charcoal filters included Yes **Light Power** 1 W Filter replacement

Light color temperature 4000 K

scale (K) Free outlet maximum 820 m<sup>3</sup>/h

capacity

280 W Motor power

No. of filters 3 **Anti-grease filters** Stainless steel

650 mm

Yes

indicator

150 mm Vent outlet 650 mm

Minimum distance from GAS hob

Minimum distance from

**ELECTRIC hob** 

Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	333	50



Speed 2	477	59
Speed 3	649	67
Intensive speed	797	72

649 m<sup>3</sup>/h

#### Accessories included

Remote control Yes Motorised opening Yes

## Performance / Energy Label

A A A	
Annual Efficiency Consumption (AEChood)	36 kWh/a
Energy efficicency class (EEC)	A+
Fluid Dynamic Efficiency (FDE)	36.6
Fluid Dynamic Efficiency class (FDEC)	Α
Lighting Efficiency (LE)	68.2 lux/W
Lighting Efficiency Class (LEC)	Α
Grease Filtering Efficiency (GFE)	61.1 %
Grease Filtering Efficiency Class (GFEC)	E
Air flow at minumum speed (Qmin)	333 m³/h

Air flow at boost speed 797 m<sup>3</sup>/h

Airbourne acouistical A- 50 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-67 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 72 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) 0.49 **Energy Efficiency Index** 39.7 Measured air flow rate 421 m<sup>3</sup>/h at best efficiency point (Qbep) Measured air pressure 422 Pa at best efficiency point (Pbep) Measured electric 135 W power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 150 lux the light on the cooking surface (Emiddle) Sound power level at 67 dBA highest setting (Lwa)

#### **Electrical Connection**

Air flow at maximum

speed (Qmax)

(Qboost)

Battery type	Alkaline-Manganese	Frequency (Hz)	50-60 Hz
Electrical connection	Dioxide (Zn/MnO2 ) 282 W	Power supply cable length	1500 mm
rating		Plug	Not present



Current 1 A

Voltage 220-240 V


# Also available


Alternative colours available

White, Black, Blue, Red

**Available colours** 

KFAB75WH-KFAB75BL-KFAB75UJ-KFAB75RD

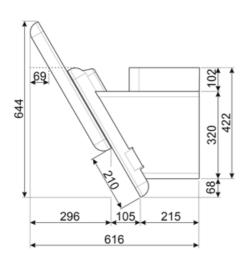

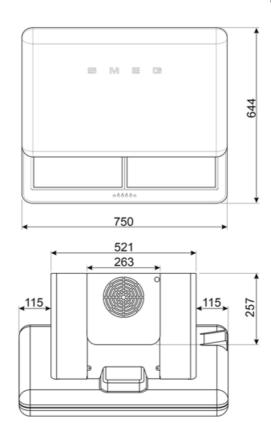



# **Compatible Accessories**

#### **FLTSI**

Charcoal filters Kit 2 pieces



#### **KITCMNFABCR**

Chimneys (2 pieces) Dimensions 550 min. 1035 max. (263x257) For KFAB75CR Cream



# Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.