

# KFAB75UJ

Product family	Hood
Hood Type	Decorative wall hood
Design	Angled
Extraction	Recirculation
Electronic control	Yes
Material	Painted material
Type of steel	Brushed
EAN code	8017709251475
Hood width	75 cm



## Aesthetics

Aesthetic	50's Style	Finishing	Glossy
Colour	Decorated / Special	Logo	Applied
Decoration / Special colour	Union Jack		





## Controls

Control setting	Electronic buttons	Led color	White
-----------------	--------------------	-----------	-------

## Programme / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features

					
No. of lights	2	Anti-grease filters	Stainless steel		
Light type	LED	Charcoal filters included	Yes		
Light Power	1 W	Filter replacement indicator	Yes		
Light color temperature scale (°K)	4000 °K	Vent outlet	150 mm		

Free outlet maximum capacity	820 m³/h	Minimum distance from GAS hob	650 mm
Motor power	280 W	Minimum distance from ELECTRIC hob	650 mm
No. of filters	3	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	333	50
Speed 2	477	59
Speed 3	649	67
Intensive speed	797	72

## Accessories Included

Remote control	Yes	Motorised opening	Yes
----------------	-----	-------------------	-----

## Performance / Energy Label

A\*




Annual Efficiency Consumption (AEChood)	36 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dB(A)
Energy efficiency class (EEC)	A+	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dB(A)
Fluid Dynamic Efficiency (FDE)	36,6	Power consumption in stand-by mode (Ps)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,7
Lighting Efficiency (LE)	68,2 lux/W	Energy Efficiency Index	39,7
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	421 m³/h
Grease Filtering Efficiency (GFE)	61,1 %	Measured air pressure at best efficiency point (Pbep)	422 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	135 W
Air flow at minumum speed (Qmin)	333 m³/h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	649 m³/h	Average illumination of the light on the cooking surface (Emiddle)	150 lux
Air flow at boost speed (Qboost)	797 m³/h	Sound power level at highest setting (Lwa)	67 dB(A)
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	50 dB(A)		

## Electrical Connection

Electrical connection rating	282 W	Frequency (Hz)	50-60 Hz
Current	1 A	Power supply cable length	1500 mm
Voltage	220-240 V		

## Also available

Alternative colours available	White, Black, Cream, Red	Available colours	KFAB75WH-KFAB75BL-KFAB75CR-KFAB75RD
-------------------------------	--------------------------	-------------------	-------------------------------------

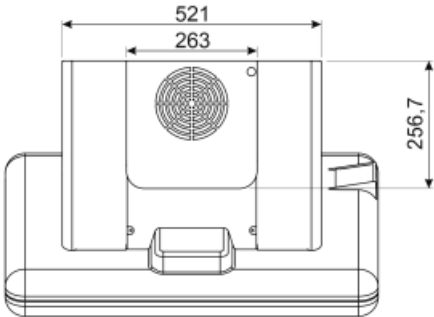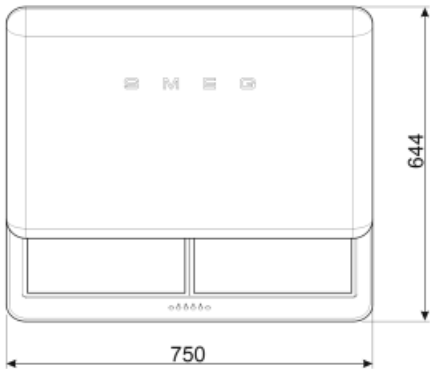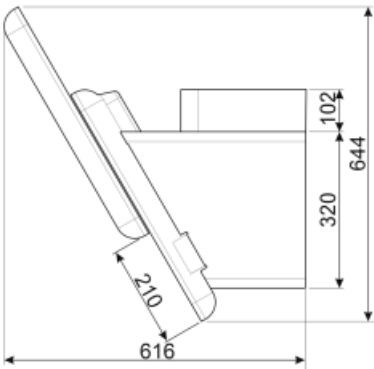

---


## Not included accessories

---



### KITCMNFABUJ

Coppia di Camini (2 pezzi) dimensioni  
550 min 1035 max (263 \* 257 mm)  
KFAB75UJ Cappa Union JACK Camini  
BLU



### FLTSI

Charcoal filters Kit 2 pieces

---

## Symbols glossary (TT)

---



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.