

# KFAB75UJ

Product family Hood

Hood Type Decorative wall hood

Design Angled Extraction Recirculation

Electronic control Yes

Material Painted material

Type of steel Brushed

EAN code 8017709251475

Hood width75 cmAesthetic50's Style

Colour Decorated / Special

Decoration / Special colour Union Jack
Finishing Glossy
Logo Applied



#### **Controls**

Control setting Electronic buttons Led color White

### **Program / Functions**

No. of speeds Intensive speed

Time-setting options





#### **Technical Features**









No. of lights 2 Light type LED Light Power 1 W

Light color temperature

scale (K)

Free outlet maximum 820 m³/h

capacity

Motor power 280 W

No. of filters 3

Anti-grease filters Stainless steel

650 mm

Charcoal filters included Yes Filter replacement Yes

indicator

Vent outlet 150 mm Minimum distance from 650 mm

GAS hob

Minimum distance from

ELECTRIC hob

Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	333	50

4000 K



Speed 2	477	59
Speed 3	649	67
Intensive speed	797	72

649 m<sup>3</sup>/h

# Accessories included

Remote control Yes Motorised opening Yes

# Performance / Energy Label

A F	
Annual Efficiency	36 kWh/a
Consumption (AEChood)	
Energy efficicency class (EEC)	A+
Fluid Dynamic Efficiency (FDE)	36,6
Fluid Dynamic Efficiency class (FDEC)	Α
Lighting Efficiency (LE)	68,2 lux/W
Lighting Efficiency Class (LEC)	Α
Grease Filtering Efficiency (GFE)	61,1 %
Grease Filtering Efficiency Class (GFEC)	E
Air flow at minumum	333 m³/h

Air flow at boost speed 797 m<sup>3</sup>/h

speed (Qmin)

speed (Qmax)

(Qboost)

Air flow at maximum

Airbourne acouistical A- weighted sound Power Emission at minimum speed (SPEmin)	50 dBA
Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	72 dBA
Time increase factor (F)	0,7
Energy Efficiency Index	39,7
Measured air flow rate at best efficiency point (Qbep)	421 m³/h
Measured air pressure at best efficiency point (Pbep)	422 Pa
Measured electric power input at best efficiency point (Wbep)	135 W
Nominal Power consumption of the light system (WL)	2 W
Average illumination of the light on the cooking surface (Emiddle)	150 lux
Sound power level at	67 dBA

highest setting (Lwa)

### **Electrical Connection**

Battery type	Alkaline-Manganese Dioxide (Zn/MnO2 )	Frequency (Hz) Power supply cable	50-60 Hz 1500 mm
Electrical connection rating	282 W	length Plug	Not present



Current 1 A

Voltage 220-240 V


### Also available


Alternative colours available

White, Black, Cream, Red

**Available colours** 

KFAB75WH-KFAB75BL-KFAB75CR-KFAB75RD



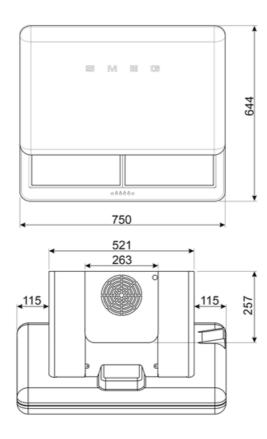



# **Compatible Accessories**

#### **FLTSI**

Charcoal filters Kit 2 pieces





#### **KITCMNFABUJ**

Chimneys (2 pieces) Dimensions 550 min. 1035 max. (263x257) For KFAB75UJ Blue



### Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.