

# KFAB75UJ

|                             |                      |
|-----------------------------|----------------------|
| Product family              | Hood                 |
| Hood Type                   | Decorative wall hood |
| Design                      | Angled               |
| Extraction                  | Recirculation        |
| Electronic control          | Yes                  |
| Material                    | Painted material     |
| Type of steel               | Brushed              |
| EAN code                    | 8017709251475        |
| Hood width                  | 75 cm                |
| Aesthetic                   | 50's Style           |
| Colour                      | Decorated / Special  |
| Decoration / Special colour | Union Jack           |
| Finishing                   | Glossy               |
| Logo                        | Applied              |




## Controls

|                 |                    |           |       |
|-----------------|--------------------|-----------|-------|
| Control setting | Electronic buttons | Led color | White |
|-----------------|--------------------|-----------|-------|

## Program / Functions

|                      |   |
|----------------------|---|
| No. of speeds        | 3   |
| Intensive speed      |  |
| Time-setting options |  |

## Technical Features



|                                   |                       |                                    |                 |
|-----------------------------------|-----------------------|------------------------------------|-----------------|
| No. of lights                     | 2                     | Anti-grease filters                | Stainless steel |
| Light type                        | LED                   | Filter replacement indicator       | Yes             |
| Light Power                       | 1 W                   | Vent outlet                        | 150 mm          |
| Light color temperature scale (K) | 4000 K                | Minimum distance from GAS hob      | 650 mm          |
| Free outlet maximum capacity      | 820 m <sup>3</sup> /h | Minimum distance from ELECTRIC hob | 650 mm          |
| Motor power                       | 280 W                 | Non return valve                   | Yes             |
| No. of filters                    | 3                     |                                    |                 |

|         | Extraction rate IEC 61591 [m <sup>3</sup> /h] | Noise level IEC 60704-2-13 [dBA] |
|---------|---|----------------------------------|
| Speed 1 | 333   | 50                               |

|                 |     |    |
|-----------------|-----|----|
| Speed 2         | 477 | 59 |
| Speed 3         | 649 | 67 |
| Intensive speed | 797 | 72 |

## Accessories included



|                   |     |                           |     |
|-------------------|-----|---------------------------|-----|
| Remote control    | Yes | Charcoal filters included | Yes |
| Motorised opening | Yes |                           |     |

## Performance / Energy Label



|  |                       |  |                       |
|--|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEChood)  | 36 kWh/a              | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 50 dBA                |
| Energy efficiency class (EEC)            | A+                    | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 67 dBA                |
| Fluid Dynamic Efficiency (FDE)           | 36,6                  | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 72 dBA                |
| Fluid Dynamic Efficiency class (FDEC)    | A                     | Time increase factor (F)   | 0,7                   |
| Lighting Efficiency (LE)                 | 68,2 lux/W            | Energy Efficiency Index  | 39,7                  |
| Lighting Efficiency Class (LEC)          | A                     | Measured air flow rate at best efficiency point (Qbep)                         | 421 m <sup>3</sup> /h |
| Grease Filtering Efficiency (GFE)        | 61,1 %                | Measured air pressure at best efficiency point (Pbep)                          | 422 Pa                |
| Grease Filtering Efficiency Class (GFEC) | E                     | Measured electric power input at best efficiency point (Wbep)                  | 135 W                 |
| Air flow at mininum speed (Qmin)         | 333 m <sup>3</sup> /h | Nominal Power consumption of the light system (WL)                             | 2 W                   |
| Air flow at maximum speed (Qmax)         | 649 m <sup>3</sup> /h | Average illumination of the light on the cooking surface (Emiddle)             | 150 lux               |
| Air flow at boost speed (Qboost)         | 797 m <sup>3</sup> /h | Sound power level at highest setting (Lwa)                                     | 67 dBA                |




## Electrical Connection

|              |   |                           |          |
|--------------|---|---------------------------|----------|
| Battery type | Alkaline-Manganese Dioxide (Zn/MnO <sub>2</sub> ) | Frequency (Hz)            | 50-60 Hz |
|              |   | Power supply cable length | 1500 mm  |

|                              |           |      |             |
|------------------------------|-----------|------|-------------|
| Electrical connection rating | 282 W     | Plug | Not present |
| Current                      | 1 A       |      |             |
| Voltage                      | 220-240 V |      |             |

## Also available

|                               |                          |                   |                                     |
|-------------------------------|--------------------------|-------------------|-------------------------------------|
| Alternative colours available | White, Black, Cream, Red | Available colours | KFAB75WH-KFAB75BL-KFAB75CR-KFAB75RD |
|-------------------------------|--------------------------|-------------------|-------------------------------------|

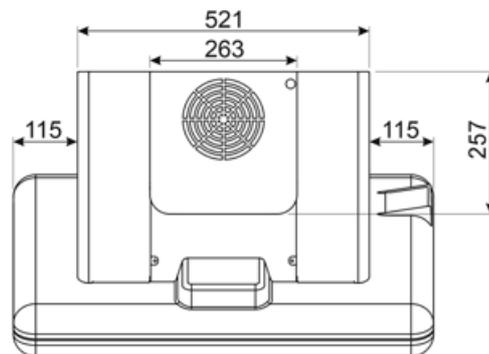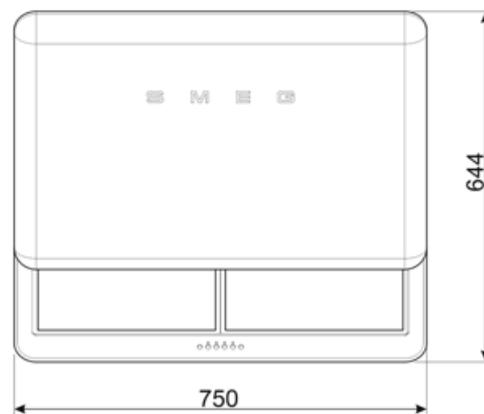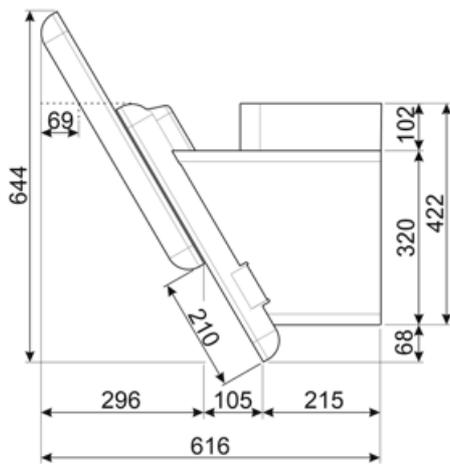

---

## Compatible Accessories

---

### FLTSI

Charcoal filters Kit 2 pieces



### KITCMNFABUJ

Chimneys (2 pieces) Dimensions 550 min. 1035 max. (263x257) For KFAB75UJ Blue



## Symbols glossary



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Charcoal filters:** Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



**Warning light(s):** to advise when filters need changing.



**Intensive/turbo setting:** when extra fast extraction is required.



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**A+:** Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.