

# KFAB75UJ

Product family	Hood
Hood Type	Decorative wall hood
Design	Angled
Extraction	Recirculation
Electronic control	Yes
Material	Painted material
Type of steel	Brushed
EAN code	8017709251475
Hood width	75 cm
Aesthetic	50's Style
Colour	Decorated / Special
Decoration / Special colour	Union Jack
Finishing	Glossy
Logo	Applied




## Controls

Control setting	Electronic buttons	Led color	White
-----------------	--------------------	-----------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features



No. of lights	2	Anti-grease filters	Stainless steel
Light type	LED	Charcoal filters included	Yes
Light Power	1 W	Filter replacement indicator	Yes
Light color temperature scale (K)	4000 K	Vent outlet	150 mm
Free outlet maximum capacity	820 m <sup>3</sup> /h	Minimum distance from GAS hob	650 mm
Motor power	280 W	Minimum distance from ELECTRIC hob	650 mm
No. of filters	3	Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	333	50

Speed 2	477	59
Speed 3	649	67
Intensive speed	797	72

## Accessories included

Remote control	Yes	Motorised opening	Yes
----------------	-----	-------------------	-----

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	36 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	50 dBA
Energy efficiency class (EEC)	A+	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Fluid Dynamic Efficiency (FDE)	36,6	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,7
Lighting Efficiency (LE)	68,2 lux/W	Energy Efficiency Index	39,7
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	421 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	61,1 %	Measured air pressure at best efficiency point (Pbep)	422 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	135 W
Air flow at mininum speed (Qmin)	333 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	649 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	150 lux
Air flow at boost speed (Qboost)	797 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	67 dBA

## Electrical Connection

Battery type	Alkaline-Manganese Dioxide (Zn/MnO <sub>2</sub> )	Frequency (Hz)	50-60 Hz
Electrical connection rating	282 W	Power supply cable length	1500 mm
		Plug	Not present

Current 1 A  
Voltage 220-240 V




## Also available

Alternative colours available

White, Black, Cream, Red

Available colours

KFAB75WH-KFAB75BL-  
KFAB75CR-KFAB75RD

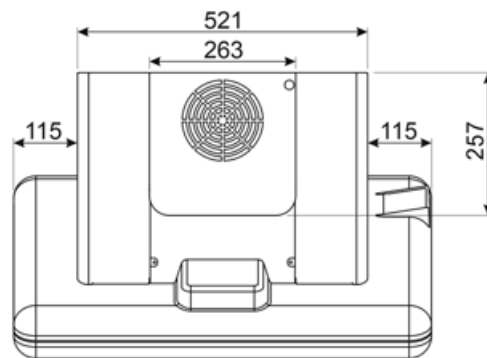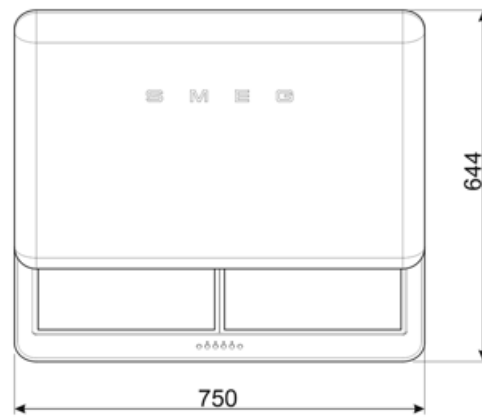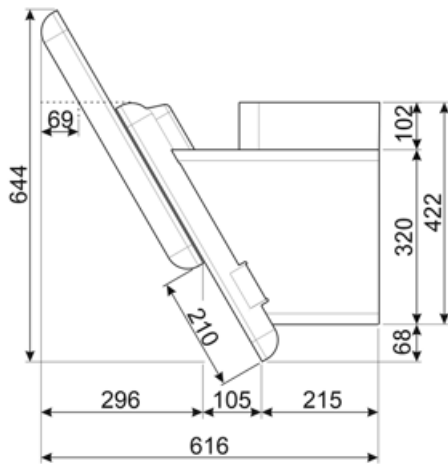


---

## Compatible Accessories

---

### FLTSI

Charcoal filters Kit 2 pieces



### KITCMNFABUJ

Chimneys (2 pieces) Dimensions 550 min. 1035 max. (263x257) For KFAB75UJ Blue



## Symbols glossary



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Charcoal filters:** Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



**Warning light(s):** to advise when filters need changing.



**Intensive/turbo setting:** when extra fast extraction is required.



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**A+:** Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.