

# KFAB75WH

Product family	Hood
Hood Type	Decorative wall hood
Design	Angled
Extraction	Recirculation
Electronic control	Yes
Material	Painted material
Type of steel	Brushed
EAN code	8017709224899
Hood width	75 cm
Aesthetic	50's Style
Colour	White
Finishing	Glossy
Logo	Applied



## Controls

Control setting	Electronic buttons	Led color	White
-----------------	--------------------	-----------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features



No. of lights	2	Anti-grease filters	Stainless steel
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Light color temperature scale (K)	4000 K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	820 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	280 W	Non return valve	Yes
No. of filters	3		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	333	50

Speed 2	477	59
Speed 3	649	67
Intensive speed	797	72

## Accessories included



Remote control Yes  
Motorised opening Yes

Charcoal filters included Yes

## Performance / Energy Label



Annual Efficiency Consumption (AEC<sub>hood</sub>) 36 kWh/a  
Energy efficiency class (EEC) A+  
Fluid Dynamic Efficiency (FDE) 36,6  
Fluid Dynamic Efficiency class (FDEC) A  
Lighting Efficiency (LE) 68,2 lux/W  
Lighting Efficiency Class (LEC) A  
Grease Filtering Efficiency (GFE) 61,1 %  
Grease Filtering Efficiency Class (GFEC) E  
Air flow at minimum speed (Q<sub>min</sub>) 333 m<sup>3</sup>/h  
Air flow at maximum speed (Q<sub>max</sub>) 649 m<sup>3</sup>/h  
Air flow at boost speed (Q<sub>boost</sub>) 797 m<sup>3</sup>/h

Airborne acoustical A-weighted sound Power Emission at minimum speed (SPE<sub>min</sub>) 50 dBA  
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE<sub>max</sub>) 67 dBA  
Airborne acoustical A-weighted sound power emission at boost speed (SPE<sub>boost</sub>) 72 dBA  
Time increase factor (F) 0,7  
Energy Efficiency Index 39,7  
Measured air flow rate at best efficiency point (Q<sub>bep</sub>) 421 m<sup>3</sup>/h  
Measured air pressure at best efficiency point (P<sub>bep</sub>) 422 Pa  
Measured electric power input at best efficiency point (W<sub>bep</sub>) 135 W  
Nominal Power consumption of the light system (WL) 2 W  
Average illumination of the light on the cooking surface (E<sub>middle</sub>) 150 lux  
Sound power level at highest setting (L<sub>wa</sub>) 67 dBA



## Electrical Connection

Battery type Alkaline-Manganese Dioxide (Zn/MnO<sub>2</sub>)  
Frequency (Hz) 50-60 Hz  
Power supply cable length 1500 mm

Electrical connection rating	282 W	Plug	Not present
Current	1 A		
Voltage	220-240 V		

## Also available

Alternative colours available	Black, Cream, Blue, Red	Available colours	KFAB75BL-KFAB75CR-KFAB75UJ-KFAB75RD
-------------------------------	-------------------------	-------------------	-------------------------------------

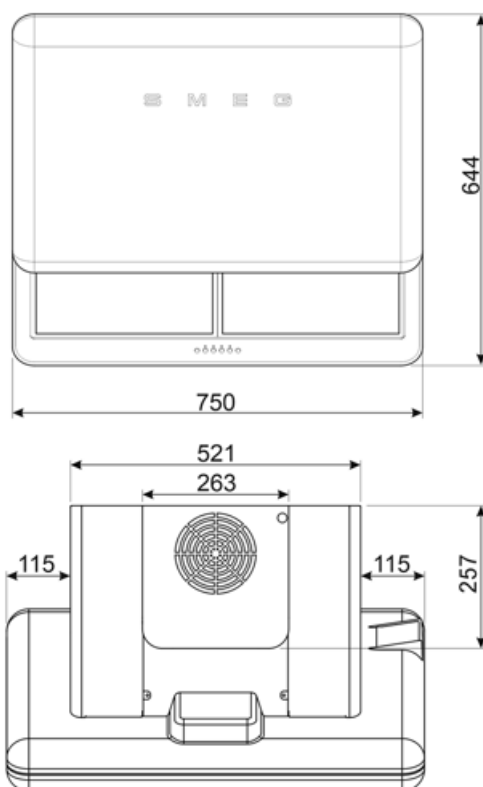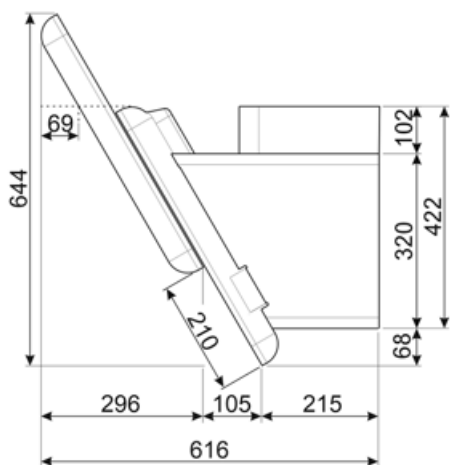


---

## Compatible Accessories

---

### FLTSI

Charcoal filters Kit 2 pieces



### KITCMNFABWH

Chimneys (2 pieces) Dimensions 550 min. 1035 max. (263x257) For KFAB75WH White



---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**A+:** Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



**Charcoal filters:** Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



**Warning light(s):** to advise when filters need changing.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Intensive/turbo setting:** when extra fast extraction is required.