

KFAB75WH

Product family	Hood
Tipo de Exaustor	Decorative wall hood
Design	Angled
Extraction	Recirculation
Electronic control	Yes
Perimeter extraction	No
Material	Painted material
Type of steel	Brushed
EAN code	8017709224899
Aesthetic	Estilo anos '50
Colour	White
Acabamento	Brilhante
Logotipo	Logotipo aplicado



Controls

Control setting	Electronic buttons	Led color	White
-----------------	--------------------	-----------	-------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	No
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	No

Technical Features



Hood without motor	No	No. of filters	3
Remote motor	No	Anti-grease filters	Stainless steel
No. of lights	2	Charcoal filters included	Yes
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Dimmer mode	No	Minimum distance from GAS hob	650 mm
Escala de temperatura de cor clara (°K)	4000 °K	Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	820 m³/h		

Motor power	280 W	Non return valve	Yes
-------------	-------	------------------	-----

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	333	50
Speed 2	477	59
Speed 3	649	67
Intensive speed	797	72

Accessories Included

Remote control	Yes	Tube reduction	No
Sliding door	Yes		

Performance / Energy Label



Consumo anual de energía (CAE extractor)	36 kWh/a
Energy efficiency class (EEC)	A+
Fluid Dynamic Efficiency (FDE)	36,6
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	68,2 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	61,1 %
Grease Filtering Efficiency Class (GFEC)	E
Air flow at minimum speed (Qmin)	333 m³/h
Air flow at maximum speed (Qmax)	649 m³/h
Air flow at boost speed (Qboost)	797 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	50 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dBA
Time increase factor (F)	0,7
Energy Efficiency Index	39,7
Measured air flow rate at best efficiency point (Qbep)	421 m³/h
Measured air pressure at best efficiency point (Pbep)	422 Pa
Measured electric power input at best efficiency point (Wbep)	135 W
Nominal Power consumption of the light system (WL)	2 W
Average illumination of the light on the cooking surface (Emiddle)	150 lux
Sound power level at highest setting (Lwa)	67 dBA

Electrical Connection



Plug	No	Voltage	220-240 V
Battery type	Alkaline-Manganese Dioxide (Zn/MnO ₂)	Frequency (Hz)	50-60 Hz
Electrical connection rating	282 W	Comprimento do cabo de alimentação	1500 mm
Current	1 A		

Also available

Outras cores disponíveis Preta, Creme, Azul,
Encarnada

Códigos das outras
cores disponíveis


KFAB75BL-KFAB75CR-
KFAB75UJ-KFAB75RD

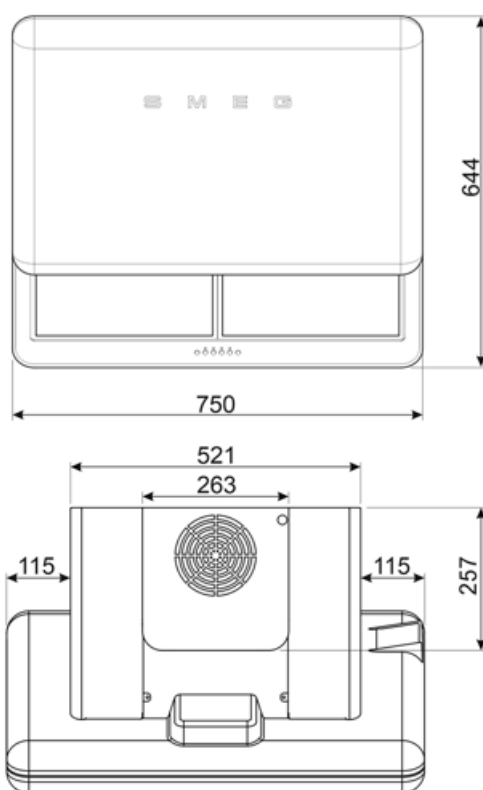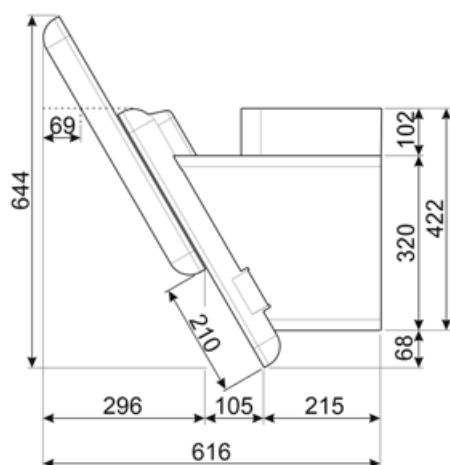

Compatible Accessories

FLTSI

Kit de filtros de carvão 2 peças



KITCMNFABWH

Par de chaminés (2 peças) dimensões
550 mín 1035 máx (263 * 257 mm)
KFAB75WH BRANCO



Symbols glossary



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



A+: A classe de eficiência energética A+ ajuda a economizar até 10% de energia em comparação com a classe A. O desempenho máximo com consumo mínimo é garantido.



Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.



Configuração intensiva/turbo: quando a extração extra rápida é necessária.



Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.



Filtros de carvão: Extrair através de filtros de carvão ou diretamente para o exterior diminui consideravelmente os fortes odores de cozimento.



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.