


# KFAB84CR






Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	Angled
Extraction	Re-circulation only
Electronic control	Yes
Material	Painted material
Type of steel	Polished
EAN code	8017709361273
Hood width	75 cm
Aesthetics	50's Style
Colour	Cream
Finishing	Gloss
Logo	Applied

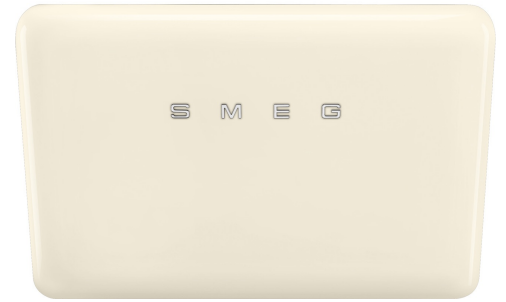

## Controls

Control setting	Touch control back-lighted White	Led colour	White
-----------------	-------------------------------------	------------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	
Auto-vent 2.0	

## Technical Features



No. of lights	2	No. of filters	1
Light type	LED	Anti-grease filters	Stainless steel
Light power	1 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light colour temperature scale (K)	4000 K	Minimum distance from GAS hob	650 mm
Light colour temperature range	2700 - 4000 K	Minimum distance from ELECTRIC hob	650 mm

Free outlet maximum capacity	712 m <sup>3</sup> /h	Non return valve	Yes
Motor power	137 W		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	279	45
Speed 2	453	57
Speed 3	605	64
Intensive speed	682	65

## Accessories Included



Charcoal filters included Yes

## Performance / Energy Label




Annual Efficiency Consumption (AEChood)	47 kWh/year	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	45 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Fluid Dynamic Efficiency (FDE)	30.1	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	65 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.9
Lighting Efficiency (LE)	51.0 lux/W	Energy Efficiency Index per first cavity	51.1
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	336 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	65.2 %	Measured air pressure at best efficiency point (Qbep)	443 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	137.3 W
Air flow at minumum speed (Qmin)	284 m <sup>3</sup> /h	Normal Power of the light system (WI)	3 W
Maximum extraction rate	620 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	153 lux
Intensive extraction rate	712 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	64 dBA

## Electrical Connection

<b>Battery type</b>		<b>Frequency (Hz)</b>	50-60 Hz
<b>Nominal power</b>	282 W	<b>Power supply cable length</b>	1500 mm
<b>Current</b>	1 A	<b>Plug</b>	No
<b>Voltage</b>	220-240 V		

## Also available

**Alternative colours available**      Matt white, Matte Black, Cream

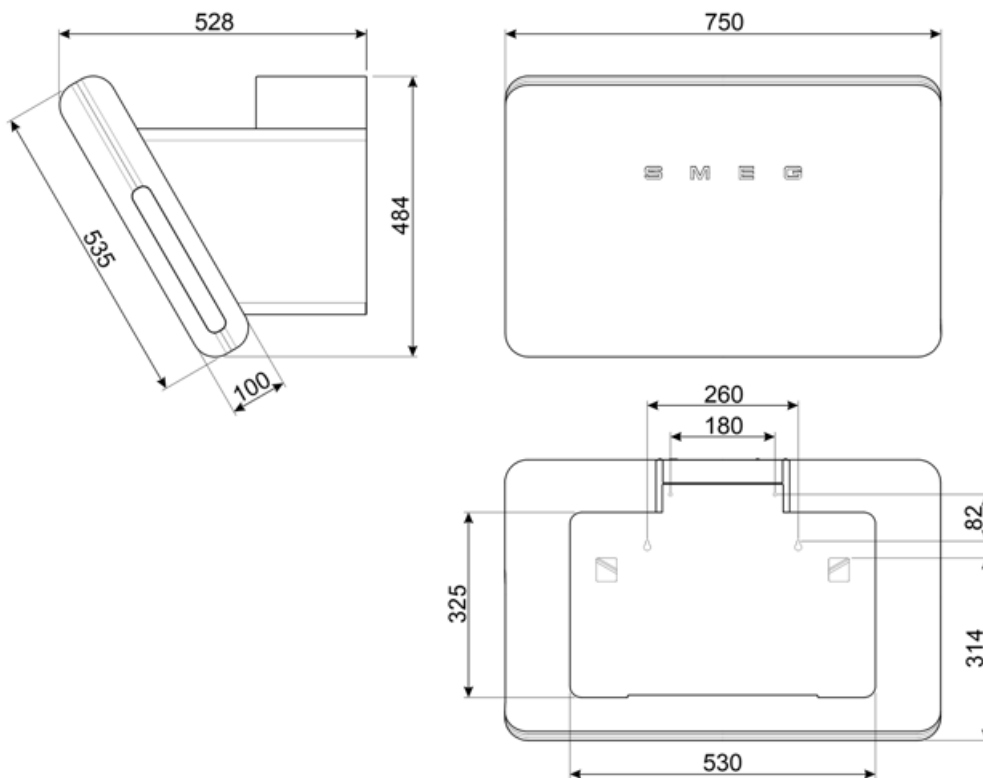

---

## Compatible Accessories

---

**FLT6**













Round Charcoal filters (kit 2 pieces)



**KITCMFABCR2**



## Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		A: Product drying performance, measured from A+++ to D / G depending on the product family
	Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Intensive/turbo setting: when extra fast extraction is required.
	Connection between hob and hood		Dimming Lights
	Tunable white from warm to cold.		V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.