KFAB84MB

Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	Angled
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Painted material
Type of steel	Polished
EAN code	8017709362669
Hood width	75 cm
Aesthetics	50's Style
Colour	Black
Finishing	Matte
Logo	Applied



Controls

Control setting	Touch control back-lighted White	**Led colour**	White

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	
V-Condense System	

Technical Features

No. of lights	2	**No. of filters**	1
Light type	LED	**Anti-grease filters**	Stainless steel
Light power	1 W	**Filter replacement indicator**	Yes
Dimmer mode	Yes	**Vent outlet**	150 mm
Light colour temperature scale (K)	4000 K	**Minimum distance from GAS hob**	650 mm
Light colour temperature range	2700 - 4000 K	**Minimum distance from ELECTRIC hob**	650 mm

Free outlet maximum capacity	712 m³/h	**Non return valve**	Yes
Motor power	137 W		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	279	45
Speed 2	453	57
Speed 3	605	64
Intensive speed	682	65

Accessories Included



Charcoal filters included Yes

Performance / Energy Label




Annual Efficiency Consumption (AEChood)	47 kWh/year	**Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)**	45 dBA
Energy efficiency class (EEC)	A	**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)**	64 dBA
Fluid Dynamic Efficiency (FDE)	30,1	**Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)**	65 dBA
Fluid Dynamic Efficiency class (FDEC)	A	**Time increase factor (F)**	0,9
Lighting Efficiency (LE)	51,0 lux/W	**Energy Efficiency Index per first cavity**	51,1
Lighting Efficiency Class (LEC)	A	**Measured air flow rate at best efficiency point (Qbep)**	336 m³/h
Grease Filtering Efficiency (GFE)	65,2 %	**Measured air pressure at best efficiency point (Qbep)**	443 Pa
Grease Filtering Efficiency Class (GFEC)	D	**Measured electric power input at best efficiency point (Wbep)**	137,3 W
Air flow at minumum speed (Qmin)	284 m³/h	**Normal Power of the light system (Wl)**	3 W
Maximum extraction rate	620 m³/h	**Average illumination of the light on the cooking surface (Emiddle)**	153 lux
Intensive extraction rate	712 m³/h	**Sound power level at highest setting (Lwa)**	64 dBA

Electrical Connection

Battery type		**Frequency (Hz)**	50-60 Hz
Nominal power	282 W	**Power supply cable length**	1500 mm
Current	1 A		
Voltage	220-240 V	**Plug**	No

Also available

Alternative colours availible	Matt white, Matte Black, Cream

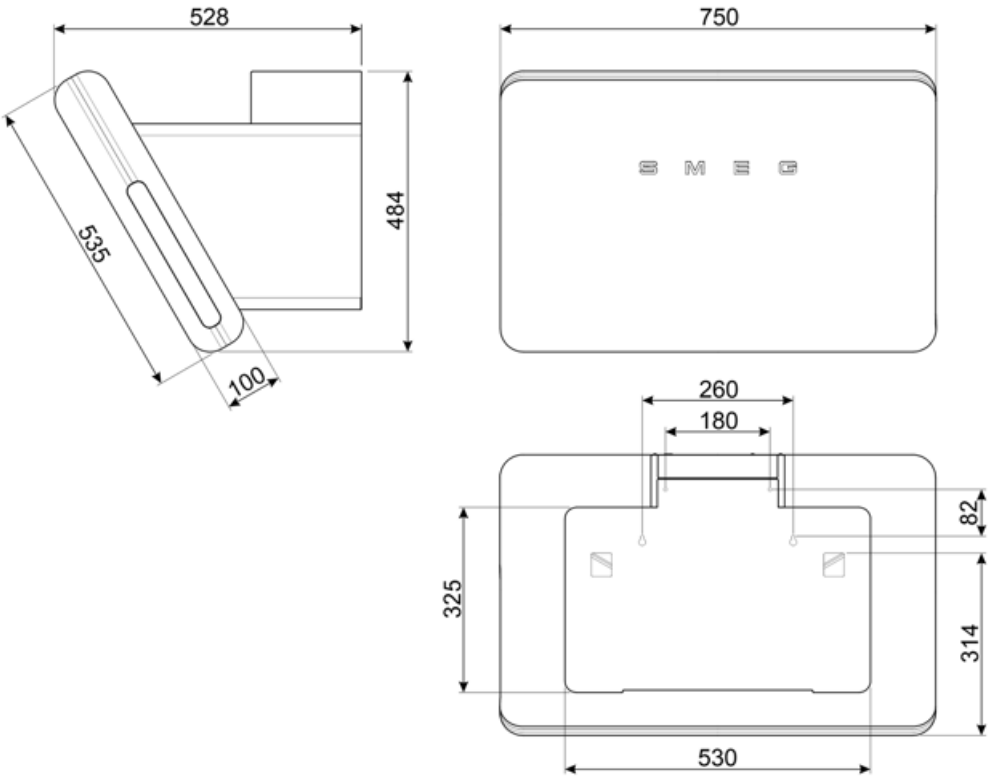

Compatible Accessories



FLT6

Round Charcoal filters (kit 2 pieces)



KITCMFABMB2

Alternative products

KFAB84CR

Colour: Cream



KFAB84MW

Colour: Matte White



KFAB84BL

Colour: Black



KFAB84ML

Colour: Moonlight

Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Connection between hob and hood



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Dimmering Lights



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Warning light(s): to advise when filters need changing.



Tunable white from warm to cold.



V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.