


KFAB84MW






Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	Angled
Extraction	Re-circulation only
Electronic control	Yes
Material	Painted material
Type of steel	Polished
EAN code	8017709362683
Hood width	75 cm
Aesthetics	50's Style
Colour	Matte White
Finishing	Matte
Logo	Applied

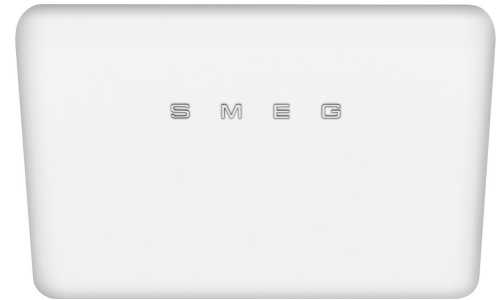

Controls

Control setting	Touch control back-lighted White	Led colour	White
-----------------	-------------------------------------	------------	-------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	
Auto-vent 2.0	

Technical Features



No. of lights	2	No. of filters	1
Light type	LED	Anti-grease filters	Stainless steel
Light power	1 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light colour temperature scale (K)	4000 K	Minimum distance from GAS hob	650 mm
Light colour temperature range	2700 - 4000 K	Minimum distance from ELECTRIC hob	650 mm

Free outlet maximum capacity	712 m ³ /h	Non return valve	Yes
Motor power	137 W		

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	279	45
Speed 2	453	57
Speed 3	605	64
Intensive speed	682	65

Accessories Included



Charcoal filters included Yes

Performance / Energy Label




Annual Efficiency Consumption (AEChood)	47 kWh/year	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	45 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Fluid Dynamic Efficiency (FDE)	30,1	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	65 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	51,0 lux/W	Energy Efficiency Index per first cavity	51,1
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	336 m ³ /h
Grease Filtering Efficiency (GFE)	65,2 %	Measured air pressure at best efficiency point (Qbep)	443 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	137,3 W
Air flow at minumum speed (Qmin)	284 m ³ /h	Normal Power of the light system (WI)	3 W
Maximum extraction rate	620 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	153 lux
Intensive extraction rate	712 m ³ /h	Sound power level at highest setting (Lwa)	64 dBA

Electrical Connection

Battery type		Frequency (Hz)	50-60 Hz
Nominal power	282 W	Power supply cable length	1500 mm
Current	1 A	Plug	No
Voltage	220-240 V		

Also available

Alternative colours available Matt white, Matte Black, Cream

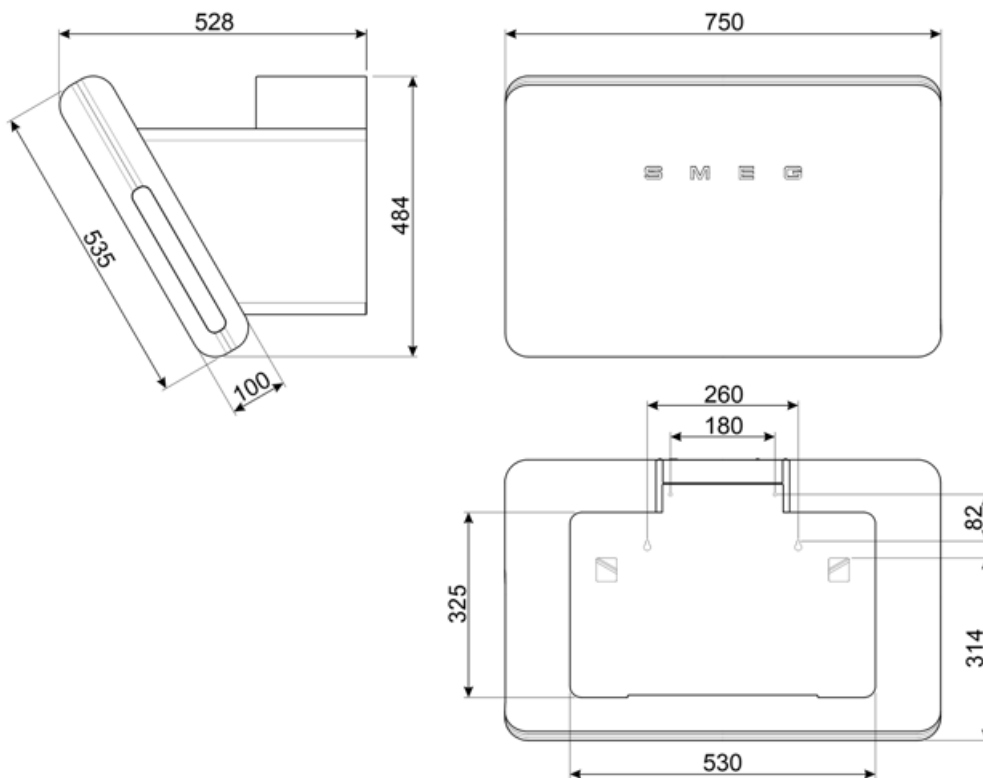

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITCMFABMW2



Alternative products


KFAB84MB

Colour: Black















KFAB84ML

Colour: Moonlight



Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		A: Product drying performance, measured from A+++ to D / G depending on the product family
	Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Intensive/turbo setting: when extra fast extraction is required.
	Connection between hob and hood		Dimming Lights
	Tunable white from warm to cold.		V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.