


# KFAB84MW






<b>Product family</b>	Hood
<b>Hood Type</b>	Decorative wall hood
<b>Design</b>	Angled
<b>Extraction</b>	Recirculation
<b>Electronic control</b>	Yes
<b>Material</b>	Painted material
<b>Type of steel</b>	Polished
<b>EAN code</b>	8017709362683
<b>Hood width</b>	75 cm
<b>Aesthetic</b>	50's Style
<b>Colour</b>	Matt White
<b>Finishing</b>	Matt
<b>Logo</b>	Applied

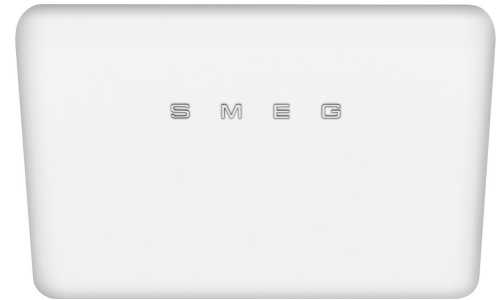






## Controls

<b>Control setting</b>	Touch control back-lighted White	<b>Led color</b>	White
------------------------	-------------------------------------	------------------	-------

## Program / Functions

<b>No. of speeds</b>	3
<b>Intensive speed</b>	
<b>24h air filter function</b>	
<b>Time-setting options</b>	
<b>Auto-vent 2.0</b>	
<b>V-Condense System</b>	

## Technical Features

				
<b>No. of lights</b>	2	<b>No. of filters</b>	1	
<b>Light type</b>	LED	<b>Anti-grease filters</b>	Stainless steel	
<b>Light Power</b>	1 W	<b>Filter replacement indicator</b>	Yes	
<b>Dimmer mode</b>	Yes	<b>Vent outlet</b>	150 mm	
<b>Light color temperature scale (K)</b>	4000 K	<b>Minimum distance from GAS hob</b>	650 mm	
<b>Light color temperature range</b>	2700 - 4000 K	<b>Minimum distance from ELECTRIC hob</b>	650 mm	

Free outlet maximum capacity	712 m <sup>3</sup> /h	Non return valve	Yes
Motor power	137 W		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	279	45
Speed 2	453	57
Speed 3	605	64
Intensive speed	682	65

## Accessories included



Charcoal filters included Yes

## Performance / Energy Label




Annual Efficiency Consumption (AEChood)	47 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	45 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Fluid Dynamic Efficiency (FDE)	30.1	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	65 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.9
Lighting Efficiency (LE)	51.0 lux/W	Energy Efficiency Index	51.1
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	336 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	65.2 %	Measured air pressure at best efficiency point (Pbep)	443 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	137.3 W
Air flow at minumum speed (Qmin)	284 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	3 W
Air flow at maximum speed (Qmax)	620 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	153 lux
Air flow at boost speed (Qboost)	712 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	64 dBA

## Electrical Connection

Battery type		Frequency (Hz)	50-60 Hz
Electrical connection rating	282 W	Power supply cable length	1500 mm
Current	1 A	Plug	Not present
Voltage	220-240 V		

## Also available

Alternative colours available: Matt white, Matt Black, Cream

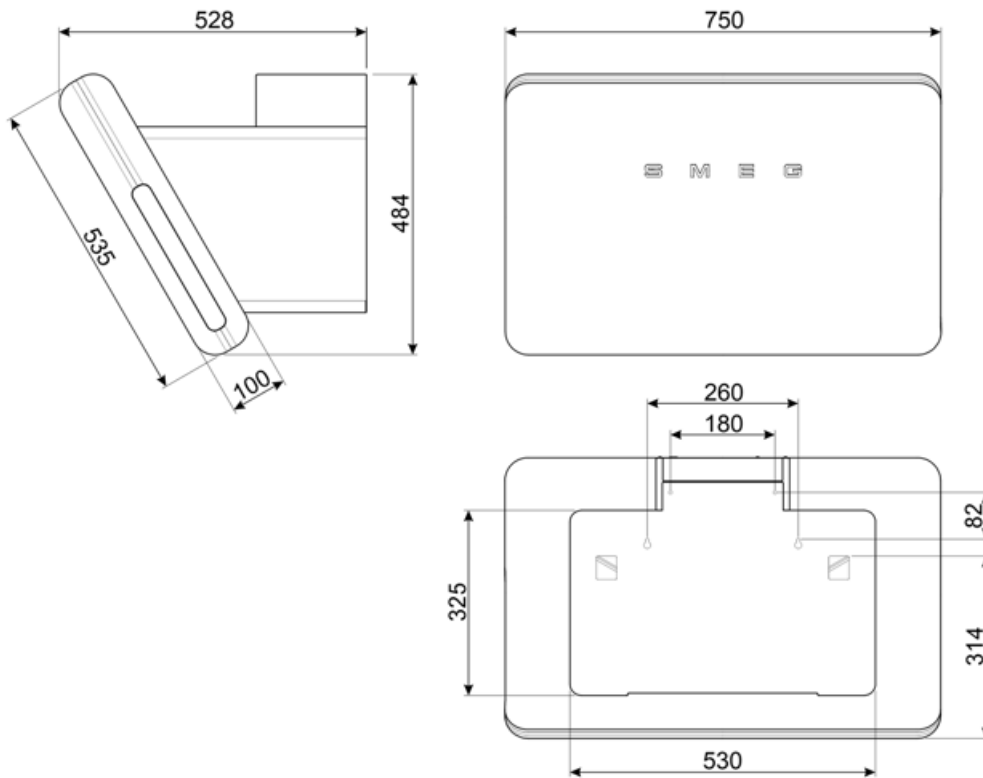

---

## Compatible Accessories

---

**FLT6**

Round Charcoal filters (kit 2 pieces)



**KITCMFABMW2**



---

## Alternative products

---


**KFAB84MB**

Colour: Black















**KFAB84ML**

Colour: Moonlight



## Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Energy efficiency class A
	Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Intensive/turbo setting: when extra fast extraction is required.
	Connection between hob and hood		Dimmering Lights
	Tunable white from warm to cold.		V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.