

KI120XE

Product family	Hood
Hood Type	Island Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709204051
Hood width	120 cm
Aesthetics	Universal
Colour	Stainless steel
Finishing	Brushed
Logo	Embossed




Controls

Control setting	Electronic buttons	Led colour	White
-----------------	--------------------	------------	-------

Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

Technical Features



No. of lights	4	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light power	1 W	Vent outlet	150 mm
Light colour	4000 K	Minimum distance from GAS hob	750 mm
temperature scale (K)		Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	820 m³/h	Non return valve	Yes
Motor power	275 W		
No. of filters	4		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	316	48

Speed 2	385	59
Speed 3	529	62
Intensive speed	783	70

Accessories Included

Tube reduction Yes


Performance / Energy Label



Annual Efficiency Consumption (AEChood)	64 kWh/year	Airbourne acoustical A- weighted sound Power	48 dBA
Energy efficiency class (EEC)	B	Emission at minimum speed (SPEmin)	
Fluid Dynamic Efficiency (FDE)	28.7	Airborne acoustical A- weighted sound Power	62 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Emission at maximum speed (SPEmax)	
Lighting Efficiency (LE)	70.9 lux/W	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	70 dBA
Lighting Efficiency Class (LEC)	A	Time increase factor (F)	1.00
Grease Filtering Efficiency (GFE)	79.8 %	Energy Efficiency Index per first cavity	58.7
Grease Filtering Efficiency Class (GFEC)	C	Measured air flow rate at best efficiency point (Qbep)	394 m ³ /h
Air flow at minimum speed (Qmin)	316 m ³ /h	Measured air pressure at best efficiency point (Qbep)	449 Pa
Maximum extraction rate	529 m ³ /h	Measured electric power input at best efficiency point (Wbep)	171 W
Intensive extraction rate	783 m ³ /h	Normal Power of the light system (WI)	4 W
		Average illumination of the light on the cooking surface (Emiddle)	312 lux
		Sound power level at highest setting (Lwa)	62 dBA

Electrical Connection

Nominal power	279 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	No
Frequency (Hz)	50-60 Hz		

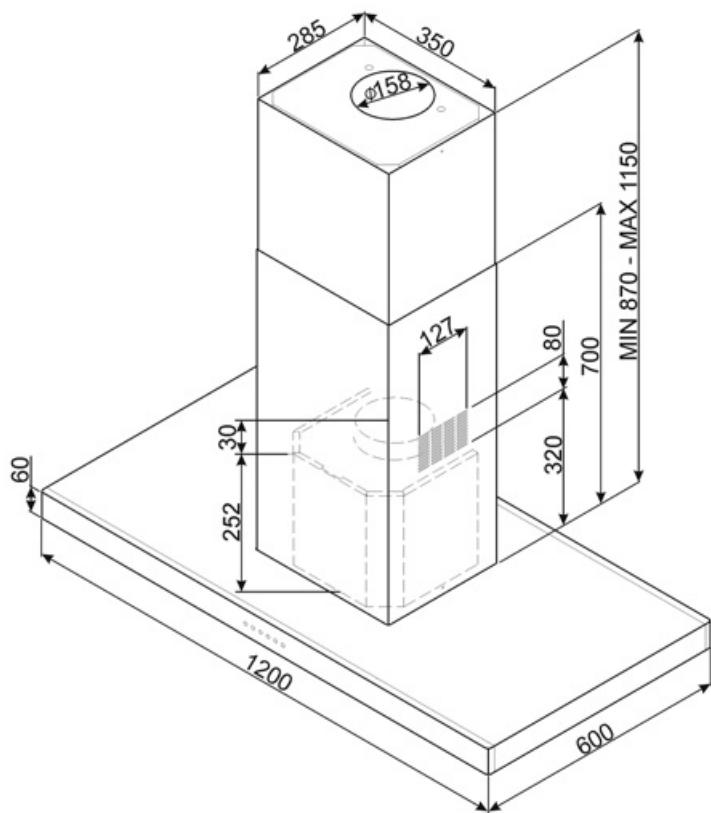

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Control panel: The control panel is located on the front of the hood, featuring a digital display and several buttons for controlling the extraction speed, lights, and other features. The control panel is typically located on the left side of the hood, just below the extraction area.