

KI120XE

Product family	Hood
Hood Type	Island Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709204051
Hood width	120 cm



Aesthetics

Aesthetics	Universal	Finishing	Brushed
Colour	Stainless steel	Logo	Embossed

Controls

Control setting	Electronic buttons	Led colour	White
-----------------	--------------------	------------	-------

Programs / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

Technical Features

				
No. of lights	4	Anti-grease filters	Aluminium	
Light type	LED	Filter replacement indicator	Yes	
Light power	1 W	Vent outlet	150 mm	
Light colour	4000 °K	Minimum distance from GAS hob	750 mm	
temperature scale (°K)		Minimum distance from ELECTRIC hob	650 mm	
Free outlet maximum capacity	820 m³/h			
Motor power	275 W			

No. of filters 4 Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	316	48
Speed 2	385	59
Speed 3	529	62
Intensive speed	783	70

Accessories Included

Tube reduction Yes

Performance / Energy Label

B

Annual Efficiency Consumption (AEChood)	64 KWh/year	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	62 dB(A)
Energy efficiency class (EEC)	B	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dB(A)
Fluid Dynamic Efficiency (FDE)	28.7	Power Consumption in Off mode (Po)	0.71 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	1.00
Lighting Efficiency (LE)	70.9 lux/W	Energy Efficiency Index per first cavity	58.7
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	394 m³/h
Grease Filtering Efficiency (GFE)	79.8 %	Measured air pressure at best efficiency point (Qbep)	449 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	171 W
Air flow at minumum speed (Qmin)	316 m³/h	Normal Power of the light system (WI)	4 W
Maximum extraction rate	529 m³/h	Average illumination of the light on the cooking surface (Emiddle)	312 lux
Intensive extraction rate	783 m³/h	Sound power level at highest setting (Lwa)	62 dB(A)
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dB(A)		

Electrical Connection


Nominal power 279 W Frequency (Hz) 50-60 Hz

Voltage

220-240 V

Power supply cable
length

1500 mm

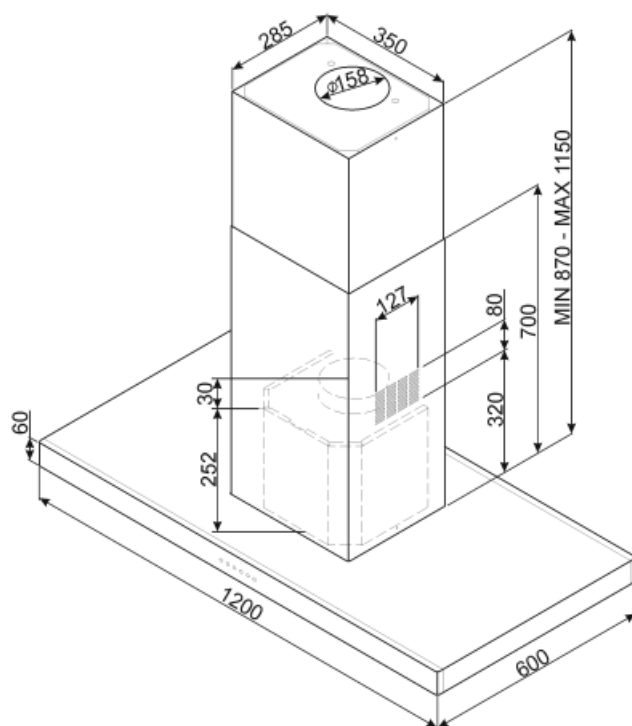

Not included accessories



FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



B: Product energy rating, measured from A+++ to D / G depending on the product family.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.