

KI120XE

Product family Hood

Hood Type Decorative island hood

DesignT flatExtractionExtractionElectronic controlYes

MaterialStainless steelType of steelBrushed

EAN code 8017709204051

Hood width120 cmAestheticUniversaleColourStainless steel

Finishing Satin
Logo Embossed



150 mm

750 mm

650 mm

Controls

Control setting Electronic buttons Led color White

Program / Functions

No. of speeds Intensive speed

Time-setting options





Vent outlet

ELECTRIC hob

GAS hob

Minimum distance from

Minimum distance from

Technical Features







No. of lights 4 Anti-grease filters Aluminium Light type LED Filter replacement Yes

Light Power 1 W indicator

Light color temperature 4000 K

scale (K)
Free outlet maximum 820 m³/h

Free outlet maximum 820 m³/l capacity

Motor power 275 W

No. of filters 4 Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	316	48



Speed 2	385	59
Speed 3	529	62
Intensive speed	783	70

Accessories Included

Tube reduction Yes

Performance / Energy Label

B f

Annual Efficiency 64 kWh/a Consumption (AEChood)

Energy efficieency class B (EEC)

Fluid Dynamic Efficiency 28,7

(FDE) Fluid Dynamic Efficiency A

class (FDEC)

Lighting Efficiency (LE) 70,9 lux/W

Lighting Efficiency Class A

(LEC)

Grease Filtering 79,8 %

316 m³/h

529 m³/h

279 W

Efficiency (GFE)

Grease Filtering C Efficiency Class (GFEC)

Air flow at minumum

speed (Qmin)

Air flow at maximum

speed (Qmax)

Air flow at boost speed 783 m³/h

(Qboost)

Airbourne acouistical A- 48 dBA

weighted sound Power **Emission at minimum** speed (SPEmin)

Airborne acoustical A-62 dBA

weighted sound Power Emission at maximum speed (SPEmax)

Airbourne acoustical A- 70 dBA

weighted sound power emission at boost speed

(SPEboost)

Time increase factor (F) 1.00 **Energy Efficiency Index** 58,7

Measured air flow rate 394 m³/h at best efficiency point

(Qbep)

Measured air pressure

at best efficiency point

(Pbep)

Measured electric 171 W

power input at best efficiency point (Wbep)

Nominal Power 4 W consumption of the light

system (WL)

Average illumination of

the light on the cooking surface (Emiddle)

Sound power level at highest setting (Lwa) 312 lux

449 Pa

62 dBA

1500 mm

Electrical Connection

Electrical connection

rating


220-240 V Voltage Frequency (Hz) 50-60 Hz

Power supply cable

length

Plug Not present



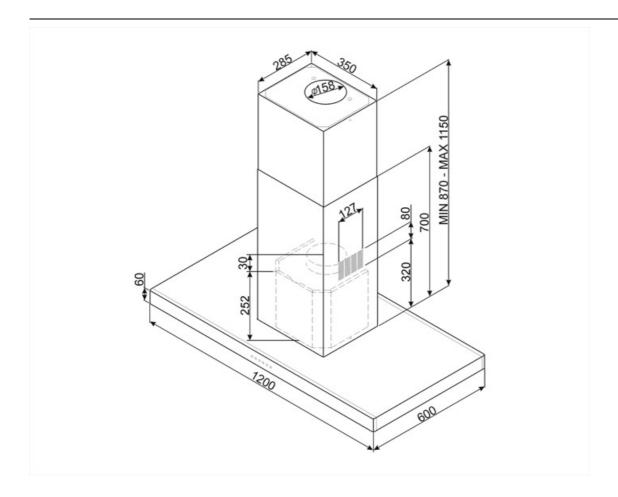



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.





Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.

Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.