

KI120XE

| | |
|--------------------|------------------------|
| Product family | Hood |
| Hood Type | Decorative island hood |
| Design | T flat |
| Extraction | Extraction |
| Electronic control | Yes |
| Material | Stainless steel |
| Type of steel | Brushed |
| EAN code | 8017709204051 |
| Hood width | 120 cm |
| Aesthetic | Universale |
| Colour | Stainless steel |
| Finishing | Satin |
| Logo | Embossed |



Controls

| | | | |
|-----------------|--------------------|-----------|-------|
| Control setting | Electronic buttons | Led color | White |
|-----------------|--------------------|-----------|-------|

Program / Functions

| | |
|----------------------|---|
| No. of speeds | 3 |
| Intensive speed |  |
| Time-setting options |  |

Technical Features



| | | | |
|-----------------------------------|-----------------------|------------------------------------|-----------|
| No. of lights | 4 | Anti-grease filters | Aluminium |
| Light type | LED | Filter replacement indicator | Yes |
| Light Power | 1 W | Vent outlet | 150 mm |
| Light color temperature scale (K) | 4000 K | Minimum distance from GAS hob | 750 mm |
| Free outlet maximum capacity | 820 m ³ /h | Minimum distance from ELECTRIC hob | 650 mm |
| Motor power | 275 W | Non return valve | Yes |
| No. of filters | 4 | | |

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dBA] |
|---------|---|----------------------------------|
| Speed 1 | 316 | 48 |

| | | |
|-----------------|-----|----|
| Speed 2 | 385 | 59 |
| Speed 3 | 529 | 62 |
| Intensive speed | 783 | 70 |

Accessories Included

Tube reduction Yes

Performance / Energy Label




Annual Efficiency Consumption (AEChood) 64 kWh/a
Energy efficiency class (EEC) B
Fluid Dynamic Efficiency (FDE) 28,7
Fluid Dynamic Efficiency class (FDEC) A
Lighting Efficiency (LE) 70,9 lux/W
Lighting Efficiency Class (LEC) A
Grease Filtering Efficiency (GFE) 79,8 %
Grease Filtering Efficiency Class (GFEC) C
Air flow at minimum speed (Qmin) 316 m³/h
Air flow at maximum speed (Qmax) 529 m³/h
Air flow at boost speed (Qboost) 783 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 48 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 62 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 70 dBA
Time increase factor (F) 1,00
Energy Efficiency Index 58,7
Measured air flow rate at best efficiency point (Qbep) 394 m³/h
Measured air pressure at best efficiency point (Pbep) 449 Pa
Measured electric power input at best efficiency point (Wbep) 171 W

Nominal Power consumption of the light system (WL) 4 W
Average illumination of the light on the cooking surface (Emiddle) 312 lux
Sound power level at highest setting (Lwa) 62 dBA

Electrical Connection

Electrical connection rating 279 W
Voltage 220-240 V
Frequency (Hz) 50-60 Hz
Power supply cable length 1500 mm
Plug Not present

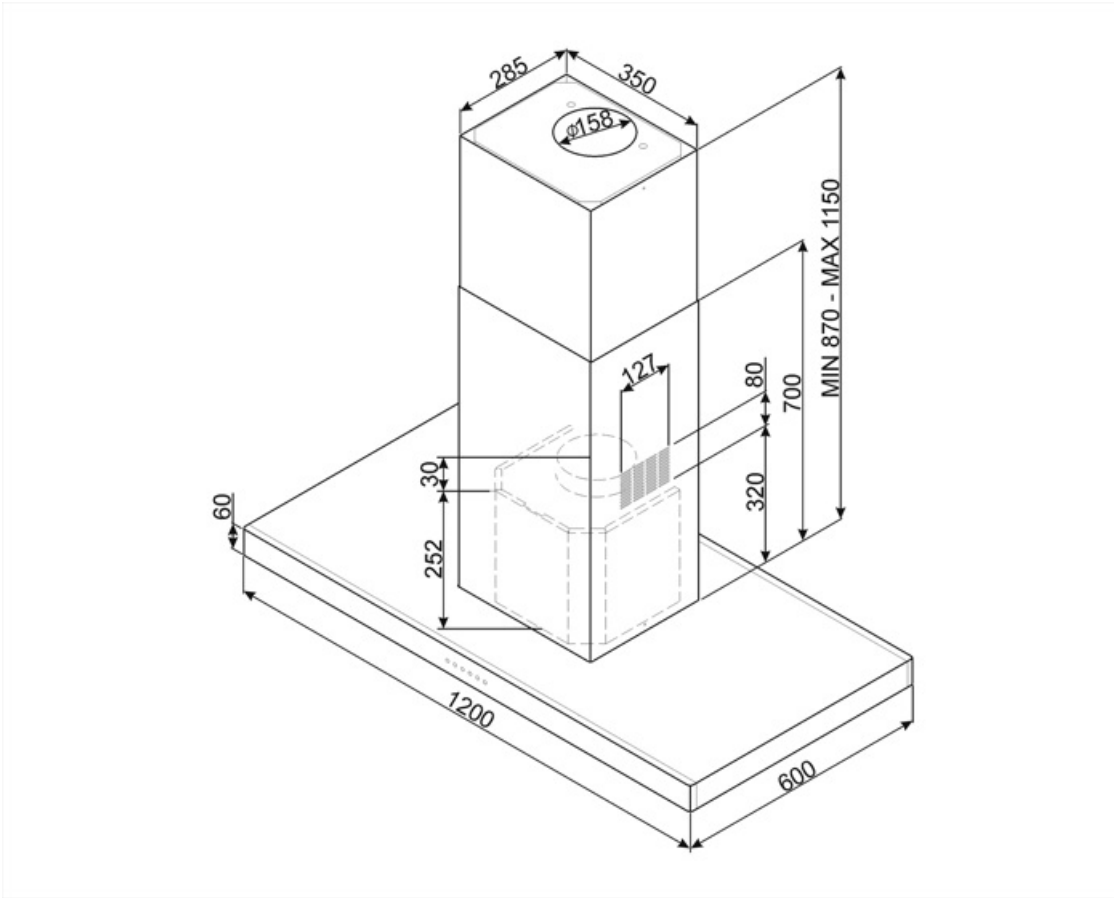

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.