

KI120XE

Product family Hood

Hood Type Decorative island hood

Design T flat Extraction Extraction **Electronic control** Yes

Stainless steel Material Type of steel Brushed

EAN code 8017709204051

Hood width 120 cm **Aesthetic** Universale Colour Stainless steel

Finishing Satin Logo **Embossed**



150 mm

750 mm

650 mm

Yes

Controls

Led color White Control setting Electronic buttons

Program / Functions

No. of speeds Intensive speed

Time-setting options





Minimum distance from

Minimum distance from

GAS hob

ELECTRIC hob

Technical Features







No. of lights 4 Anti-grease filters Aluminium LED Filter replacement Light type Yes indicator

1 W **Light Power** Vent outlet

Light color temperature 4000 K scale (K)

Free outlet maximum 820 m³/h

capacity 275 W Motor power

Non return valve No. of filters 4

		Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed	1	316	48

SMEG SPA 12/12/2025



Speed 2	385	59
Speed 3	529	62
Intensive speed	783	70

Accessories included

Tube reduction Yes

Performance / Energy Label

B f

Annual Efficiency 64 kWh/a Consumption (AEChood)

Energy efficieency class B

(EEC)

Fluid Dynamic Efficiency 28,7

(FDE)

Fluid Dynamic Efficiency A

class (FDEC)

Lighting Efficiency (LE) 70,9 lux/W

C

529 m³/h

279 W

Lighting Efficiency Class A

(LEC)

Grease Filtering 79,8 %

Efficiency (GFE)

Grease Filtering

Efficiency Class (GFEC)

Air flow at minumum 316 m³/h

speed (Qmin)

Air flow at maximum

speed (Qmax)

Air flow at boost speed 783 m³/h

(Qboost)

Airbourne acouistical A- 48 dBA

weighted sound Power **Emission at minimum**

speed (SPEmin)

Airborne acoustical A-62 dBA

weighted sound Power Emission at maximum speed (SPEmax)

Airbourne acoustical A- 70 dBA

weighted sound power emission at boost speed

(SPEboost)

Time increase factor (F) 1.00

Energy Efficiency Index 58,7 Measured air flow rate 394 m³/h

at best efficiency point

(Qbep)

Measured air pressure

at best efficiency point

(Pbep)

Measured electric 171 W

power input at best efficiency point (Wbep)

Nominal Power 4 W consumption of the light

system (WL)

Average illumination of 312 lux

the light on the cooking surface (Emiddle)

Sound power level at highest setting (Lwa)

449 Pa

62 dBA

1500 mm

Electrical Connection

Electrical connection

rating

220-240 V Voltage Frequency (Hz) 50-60 Hz


Power supply cable

length

Plug Not present

SMEG SPA 12/12/2025



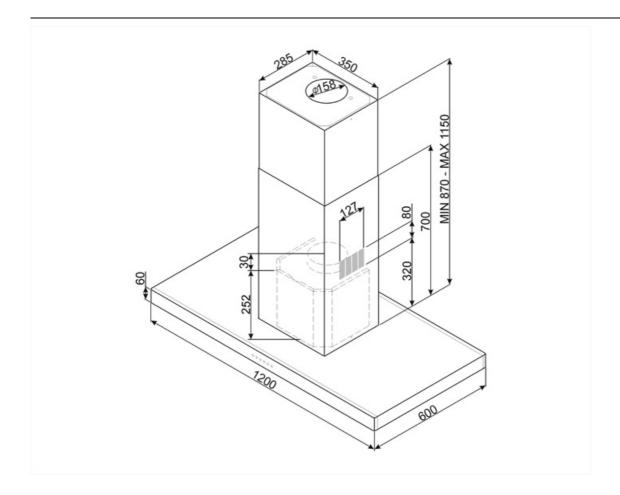

SMEG SPA 12/12/2025



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

SMEG SPA 12/12/2025



Symbols glossary



·Ö-

Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.




Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.





Warning light(s): to advise when filters need changing.





Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 12/12/2025