

# KI120XE

**Product family** Hood

**Hood Type** Decorative island hood

Design T flat Extraction Extraction **Electronic control** Yes

Stainless steel Material Type of steel Brushed

EAN code 8017709204051

Hood width 120 cm **Aesthetic** Universale Colour Stainless steel

Satin **Finishing** Logo **Embossed** 



### **Controls**

Led color White Control setting Electronic buttons

## **Program / Functions**

No. of speeds Intensive speed

Time-setting options





### **Technical Features**







No. of lights 4 Anti-grease filters LED Filter replacement Light type Yes

1 W **Light Power** 

Light color temperature 4000 K

scale (K)

Free outlet maximum 820 m<sup>3</sup>/h

capacity 275 W

Motor power No. of filters 4 Aluminium

indicator

150 mm Vent outlet 750 mm Minimum distance from

GAS hob

Minimum distance from

**ELECTRIC hob** 

Non return valve

650 mm

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	316	48

**SMEG SPA** 12/7/2025



Speed 2	385	59
Speed 3	529	62
Intensive speed	783	70

### Accessories included

**Tube reduction** Yes

## Performance / Energy Label

B f

**Annual Efficiency** 64 kWh/a Consumption (AEChood) Energy efficieency class B

(EEC)

Fluid Dynamic Efficiency 28,7

(FDE)

Fluid Dynamic Efficiency A class (FDEC)

Lighting Efficiency (LE) 70,9 lux/W

Lighting Efficiency Class A

(LEC)

**Grease Filtering** 79,8 % Efficiency (GFE)

529 m<sup>3</sup>/h

783 m<sup>3</sup>/h

279 W

**Grease Filtering** C Efficiency Class (GFEC)

Air flow at minumum 316 m<sup>3</sup>/h

speed (Qmin)

Air flow at maximum

speed (Qmax)

Air flow at boost speed

(Qboost)

Airbourne acouistical A- 48 dBA

weighted sound Power **Emission at minimum** speed (SPEmin)

Airborne acoustical A-62 dBA

weighted sound Power Emission at maximum speed (SPEmax)

Airbourne acoustical A- 70 dBA

weighted sound power emission at boost speed

(SPEboost)

Time increase factor (F) 1.00 **Energy Efficiency Index** 58,7 394 m<sup>3</sup>/h

Measured air flow rate at best efficiency point

(Qbep)

Measured air pressure 449 Pa

at best efficiency point

(Pbep)

Measured electric 171 W power input at best

efficiency point (Wbep)

**Nominal Power** 4 W consumption of the light system (WL)

Average illumination of

the light on the cooking surface (Emiddle)

Sound power level at highest setting (Lwa) 312 lux

62 dBA

1500 mm

#### **Electrical Connection**

**Electrical connection** 

rating

220-240 V Voltage Frequency (Hz) 50-60 Hz


Power supply cable

length

Plug Not present

**SMEG SPA** 12/7/2025



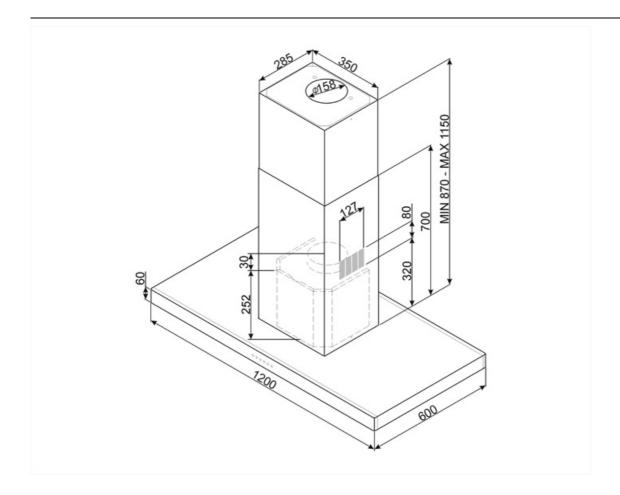

SMEG SPA 12/7/2025



# **Compatible Accessories**

#### FLT6

Round Charcoal filters (kit 2 pieces)





#### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

SMEG SPA 12/7/2025



## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



SMEG SPA 12/7/2025