

# KI52E3

|                |                                       |
|----------------|---------------------------------------|
| Product family | Hood                                  |
| Hood Type      | Canopy Cooker Hoods                   |
| Design         | Fully integrated                      |
| Extraction     | Ducted out or re-circulation possible |
| Material       | Painted material                      |
| EAN code       | 8017709304362                         |
| Hood width     | 52 cm                                 |



## Aesthetics

|            |           |                   |             |
|------------|-----------|-------------------|-------------|
| Aesthetics | Universal | Serigraphy colour | Black       |
| Colour     | Silver    | Logo              | Silk screen |

## Controls

|                 |        |
|-----------------|--------|
| Control setting | Slider |
|-----------------|--------|

## Programs / Functions

|               |   |
|---------------|---|
| No. of speeds | 3 |
|---------------|---|

## Technical Features



|                              |          |                                    |           |
|------------------------------|----------|------------------------------------|-----------|
| No. of lights                | 2        | No. of filters                     | 1         |
| Light type                   | LED      | Anti-grease filters                | Aluminium |
| Light power                  | 4 W      | Vent outlet                        | 150 mm    |
| Light colour                 | 3000 °K  | Minimum distance from GAS hob      | 650 mm    |
| Free outlet maximum capacity | 350 m³/h | Minimum distance from ELECTRIC hob | 500 mm    |
| Motor power                  | 115 W    |                                    |           |

|         | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dB(A)] |
|---------|----------------------------------|------------------------------------|
| Speed 1 | 160                              | 54                                 |
| Speed 2 | 220                              | 59                                 |
| Speed 3 | 335                              | 66                                 |

## Accessories Included

Tube reduction Yes

## Performance / Energy Label



Annual Efficiency Consumption (AEChood) 59 KWh/year

Energy efficiency class (EEC) C

Fluid Dynamic Efficiency (FDE) 13.1

Fluid Dynamic Efficiency class (FDEC) D

Lighting Efficiency (LE) 13 lux/W

Lighting Efficiency Class (LEC) D

Grease Filtering Efficiency (GFE) 75.1 %

Grease Filtering Efficiency Class (GFEC) C

Air flow at minumum speed (Qmin) 160 m³/h

Maximum extraction rate 335 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 54 dB(A)

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 66 dB(A)

Time increase factor (F) 1.5

Energy Efficiency Index per first cavity 80.6

Measured air flow rate at best efficiency point (Qbep) 153 m³/h

Measured air pressure at best efficiency point (Qbep) 196 Pa

Measured electric power input at best efficiency point (Wbep) 103 W

Normal Power of the light system (WI) 8 W






Average illumination of the light on the cooking surface (Emiddle) 100 lux

Sound power level at highest setting (Lwa) 66 dB(A)

## Electrical Connection

Plug UK 13 AMP  
Nominal power 103 W  
Voltage 220-240 V

Frequency (Hz) 50 Hz  
Power supply cable length 1000 mm

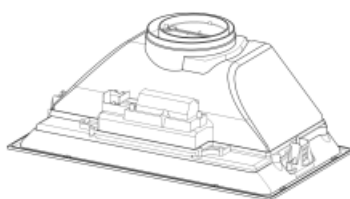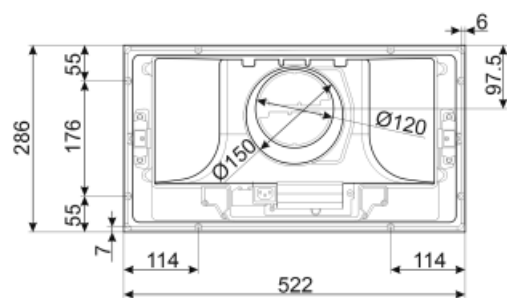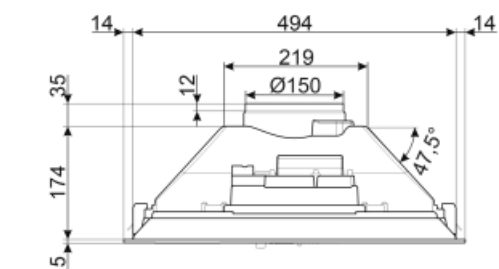

---

## Not included accessories

---

**KITFC6191**

Charcoal filter round (kit 2 pieces)



---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**C:** Product energy rating



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.