

# KI905NXE2

Product family	Hood
Tipo de Exaustor	Decorative island hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	No
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709253882
Aesthetic	Linea
Colour	Black
Acabamento	Satin
Logotipo	Logotipo embutido



## Controls



Control setting	Touch control	Display	Yes
Led color	Ice		

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	No
Other functions	No
Time-setting options	No
Other options	No
Ventilação automática	No

## Technical Features



Hood without motor	No	No. of filters	3
Remote motor	No	Anti-grease filters	Aluminium
No. of lights	4	Charcoal filters included	No
Light type	LED	Filter replacement indicator	No
Light Power	1 W	Vent outlet	150 mm
Dimmer mode	No	Minimum distance from GAS hob	650 mm
Escala de temperatura de cor clara (°K)	4000 °K		

Free outlet maximum capacity	820 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	266	49
Speed 2	385	59
Speed 3	469	61
Intensive speed	703	70

## Accessories Included

Remote control	No	Tube reduction	No
Sliding door	No		

## Performance / Energy Label




Consumo anual de energía (CAE exaustor)	68 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	49 dBA
Energy efficiency class (EEC)	B	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	61 dBA
Fluid Dynamic Efficiency (FDE)	27,9	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Fluid Dynamic Efficiency class (FDEC)	B	Power Consumption in Off mode (Po)	0,49 W
Lighting Efficiency (LE)	79,8 lux/W	Time increase factor (F)	1,00
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	399 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	84,3 %	Measured air pressure at best efficiency point (Pbep)	445 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	176 W
Air flow at minumum speed (Qmin)	266 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	4 W
Air flow at maximum speed (Qmax)	469 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	351 lux
Air flow at boost speed (Qboost)	703 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	61 dBA

## Electrical Connection

Plug	No	Frequency (Hz)	50-60 Hz
Electrical connection rating	279 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V		

## Optional accessories

Charcoal filter	FLT6	Non return valve	No
Remote control	No	Kit with aesthetic components	No
Chimney extension	No	Diffuser kit	No
Vent outlet	No		

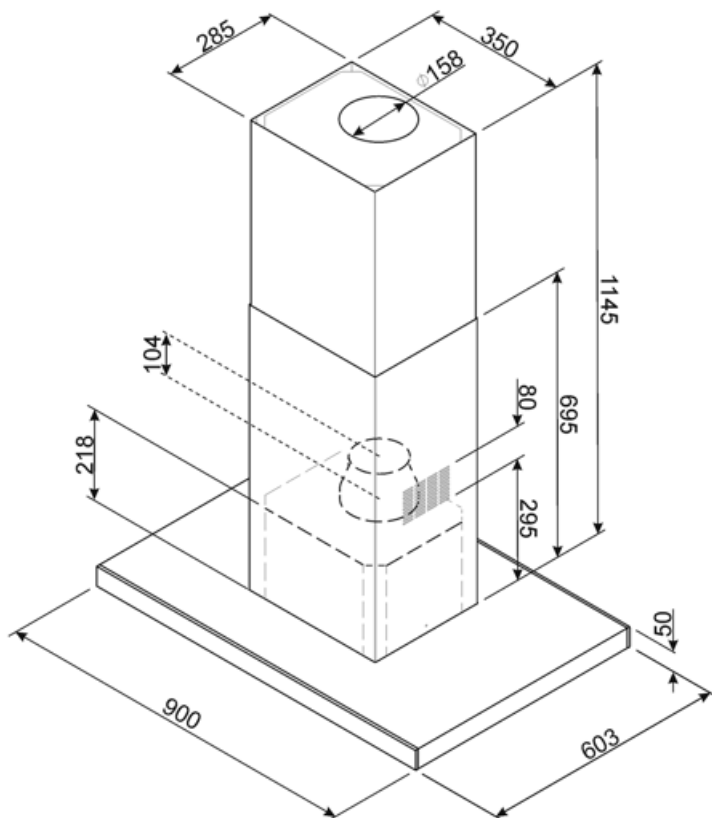

---

## Compatible Accessories

---

### FLT6

Filtros de carvão redondos (kit 2 peças)



### KITALLFC

Filtro de carvão universal Aço inoxidável AISI 304 O filtro pode ser lavado na máquina lava-louça a 50 °C (água e detergente adequado) e para secar colocar no forno 180°C 25 minutos



## Symbols glossary

---



**Filtros:** O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



**Display LED:** para mostrar os programas, funções e opções selecionadas e o tempo até ao final do ciclo.



**Controles táteis:** O controles táteis, fáceis de usar, permitem que o aparelho seja programado com o toque de um botão.



**Luzes:** Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.



**Configuração intensiva/turbo:** quando a extração extra rápida é necessária.