

KI90CE

Product family	Hood
Hood Type	Decorative island hood
Design	Chimney
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709204068
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Embossed



Controls

Control setting	Buttons	Led color	White
-----------------	---------	-----------	-------

Programs / Functions

No. of speeds	3
---------------	---

Technical Features



No. of lights	4	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	600 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	200 W	Non return valve	Yes
No. of filters	3		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	239	40
Speed 2	410	57

Speed 3	578	63
------------	-----	----

Accessories included

Tube reduction	Yes
----------------	-----

Performance / Energy Label




Annual Efficiency Consumption (AEChood)	57 kWh/a
Energy efficiency class (EEC)	B
Fluid Dynamic Efficiency (FDE)	24,1
Fluid Dynamic Efficiency class (FDEC)	B
Lighting Efficiency (LE)	93,9 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	80,3 %
Grease Filtering Efficiency Class (GFEC)	C
Air flow at minumum speed (Qmin)	239 m³/h
Air flow at maximum speed (Qmax)	578 m³/h

Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	40 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	63 dBA
Time increase factor (F)	1,1
Energy Efficiency Index	62,3
Measured air flow rate at best efficiency point (Qbep)	333 m³/h
Measured air pressure at best efficiency point (Pbep)	348 Pa
Measured electric power input at best efficiency point (Wbep)	134 W
Nominal Power consumption of the light system (WL)	4 W
Average illumination of the light on the cooking surface (Emiddle)	413 lux
Sound power level at highest setting (Lwa)	63 dBA

Electrical Connection

Plug	Not present	Frequency (Hz)	50-60 Hz
Electrical connection rating	205 W	Power supply cable length	1000 mm
Voltage	220-240 V		

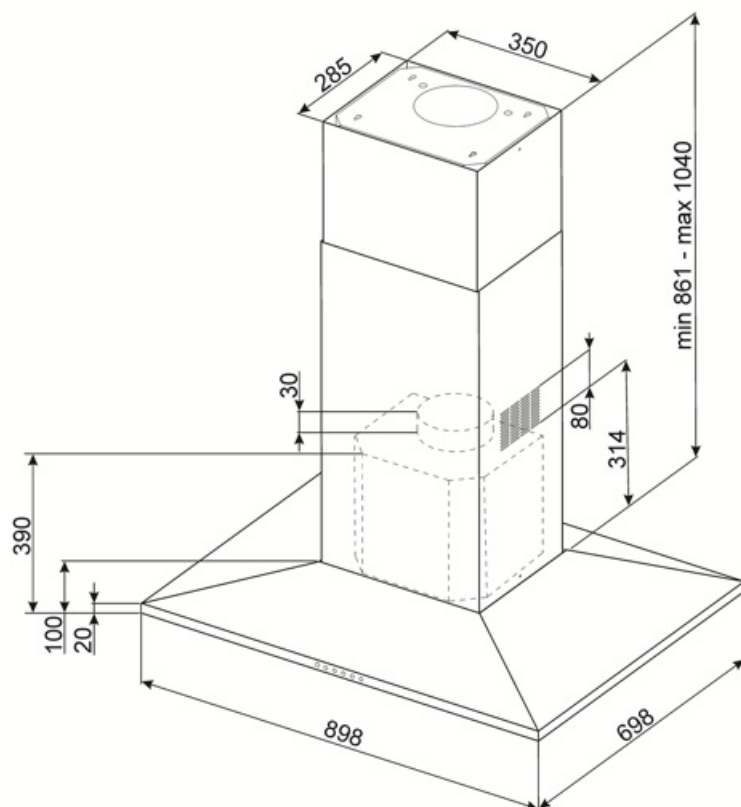

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.