

# KI90CE

Product family	Hood
Hood Type	Decorative island hood
Design	Chimney
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709204068
Hood width	90 cm



## Aesthetics

Aesthetic Colour	Universale Stainless steel	Finishing Logo	Satin Embossed
------------------	----------------------------	----------------	----------------

## Controls

Control setting	Buttons	Led color	White
-----------------	---------	-----------	-------

## Programme / Functions

No. of speeds	3
---------------	---

## Technical Features



No. of lights	4	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	600 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	200 W	Non return valve	Yes
No. of filters	3		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	239	40
Speed 2	410	57
Speed 3	578	63

## Accessories Included

Tube reduction Yes

## Performance / Energy Label

8


**Annual Efficiency Consumption (AEChood)** 57 kWh/a  
**Energy efficiency class (EEC)** B  
**Fluid Dynamic Efficiency (FDE)** 24,1  
**Fluid Dynamic Efficiency class (FDEC)** B  
**Lighting Efficiency (LE)** 93,9 lux/W  
**Lighting Efficiency Class (LEC)** A  
**Grease Filtering Efficiency (GFE)** 80,3 %  
**Grease Filtering Efficiency Class (GFEC)** C  
**Air flow at mininum speed (Qmin)** 239 m³/h  
**Air flow at maximum speed (Qmax)** 578 m³/h

**Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)** 40 dB(A)  
**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** 63 dB(A)  
**Time increase factor (F)** 1,1  
**Energy Efficiency Index** 62,3  
**Measured air flow rate at best efficiency point (Qbep)** 333 m³/h  
**Measured air pressure at best efficiency point (Pbep)** 348 Pa  
**Measured electric power input at best efficiency point (Wbep)** 134 W  
**Nominal Power consumption of the light system (WL)** 4 W  
**Average illumination of the light on the cooking surface (Emiddle)** 413 lux  
**Sound power level at highest setting (Lwa)** 63 dB(A)

## Electrical Connection

**Electrical connection rating** 205 W  
**Voltage** 220-240 V

**Frequency (Hz)** 50-60 Hz  
**Power supply cable length** 1000 mm

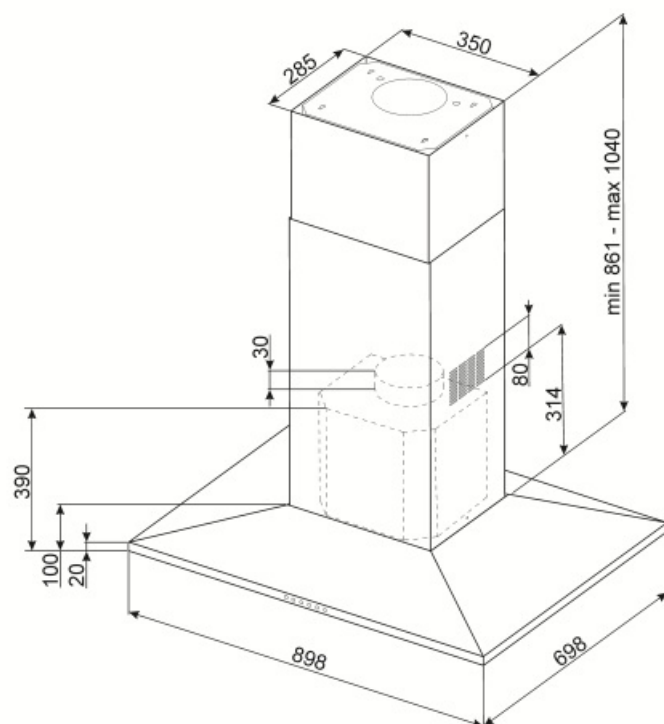

---

## Not included accessories

---



### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary (TT)

---



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



B: Product energy rating, measured from A+++ to D / G depending on the product family.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.