

KI90XE

Product family Hood

Hood Type Decorative island hood

Design T flat Extraction Extraction **Electronic control** Yes

Stainless steel Material Type of steel Brushed

EAN code 8017709204044

Hood width 90 cm **Aesthetic** Universale Colour Stainless steel

Finishing Satin Logo **Embossed**



Controls

Led color White Control setting Electronic buttons

Program / Functions

No. of speeds Intensive speed

Time-setting options





Technical Features







No. of lights 4 Anti-grease filters LED Filter replacement Light type Yes

1 W **Light Power**

Light color temperature 4000 K scale (K)

Free outlet maximum 820 m³/h

capacity

Motor power 275 W

No. of filters 3 Aluminium

indicator Vent outlet

150 mm Minimum distance from 750 mm

GAS hob

Minimum distance from

ELECTRIC hob

Non return valve

650 mm

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	311	49

SMEG SPA 26/11/2025



Speed 2	385	59
Speed 3	533	63
Intensive speed	740	71

Accessories included

Tube reduction Yes

Performance / Energy Label

B f

Annual Efficiency 66 kWh/a Consumption (AEChood) Energy efficieency class B (EEC)

Fluid Dynamic Efficiency 27.4 (FDE)

Fluid Dynamic Efficiency B class (FDEC)

Lighting Efficiency (LE) 88.6 lux/W

Lighting Efficiency Class A (LEC)

Grease Filtering 83.1 % Efficiency (GFE) **Grease Filtering**

C Efficiency Class (GFEC)

Air flow at minumum 311 m³/h

speed (Qmin)

Air flow at maximum 533 m³/h

speed (Qmax)

Air flow at boost speed 740 m³/h (Qboost)

Measured electric power input at best

efficiency point (Wbep) **Nominal Power**

consumption of the light

Airbourne acouistical A- 49 dBA

Airbourne acoustical A- 71 dBA

weighted sound Power **Emission at minimum**

Airborne acoustical A-

weighted sound Power

weighted sound power

Energy Efficiency Index

Measured air flow rate

at best efficiency point

Measured air pressure

at best efficiency point

emission at boost speed

Emission at maximum

speed (SPEmin)

speed (SPEmax)

(SPEboost)

(Qbep)

(Pbep)

system (WL)

Average illumination of the light on the cooking surface (Emiddle)

Sound power level at highest setting (Lwa)

1500 mm

390 lux

63 dBA

58.8

390 m³/h

451 Pa

171 W

4 W

63 dBA

Electrical Connection

Electrical connection 279 W

rating

220-240 V Voltage Frequency (Hz) 50-60 Hz


Power supply cable

length

Plug Not present

SMEG SPA 26/11/2025



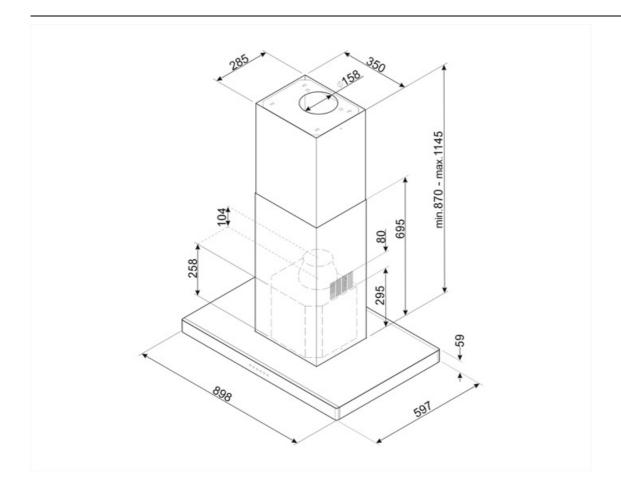

SMEG SPA 26/11/2025



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

SMEG SPA 26/11/2025



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



SMEG SPA 26/11/2025