

KI90XE

Product family	Hood
Tipo de Exaustor	Decorative island hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	No
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709204044
Hood width	90 cm
Aesthetic	Universal
Colour	Stainless steel
Acabamento	Satin
Logotipo	Logotipo embutido



Controls

Control setting	Electronic buttons	Display	No
Led color	White		

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	No
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	No

Technical Features

				
Hood without motor	No	No. of filters	3	
Remote motor	No	Anti-grease filters	Aluminium	
No. of lights	4	Charcoal filters included	No	
Light type	LED	Filter replacement indicator	Yes	
Light Power	1 W	Vent outlet	150 mm	
Dimmer mode	No	Minimum distance from GAS hob	750 mm	
Escala de temperatura de cor clara (K)	4000 K			

Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	311	49
Speed 2	385	59
Speed 3	533	63
Intensive speed	740	71

Accessories Included

Remote control	No	Tube reduction	Yes
Sliding door	No		


Performance / Energy Label



Consumo anual de energia (CAE exaustor)	66 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	49 dBA
Energy efficiency class (EEC)	B	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	63 dBA
Fluid Dynamic Efficiency (FDE)	27,4	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dBA
Fluid Dynamic Efficiency class (FDEC)	B	Energy Efficiency Index	58,8
Lighting Efficiency (LE)	88,6 lux/W	Measured air flow rate at best efficiency point (Qbep)	390 m³/h
Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (Pbep)	451 Pa
Grease Filtering Efficiency (GFE)	83,1 %	Measured electric power input at best efficiency point (Wbep)	171 W
Grease Filtering Efficiency Class (GFEC)	C	Nominal Power consumption of the light system (WL)	4 W
Air flow at minumum speed (Qmin)	311 m³/h	Average illumination of the light on the cooking surface (Emiddle)	390 lux
Air flow at maximum speed (Qmax)	533 m³/h	Sound power level at highest setting (Lwa)	63 dBA
Air flow at boost speed (Qboost)	740 m³/h		

Electrical Connection

Electrical connection rating	279 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V	Plug	No
Frequency (Hz)	50-60 Hz		

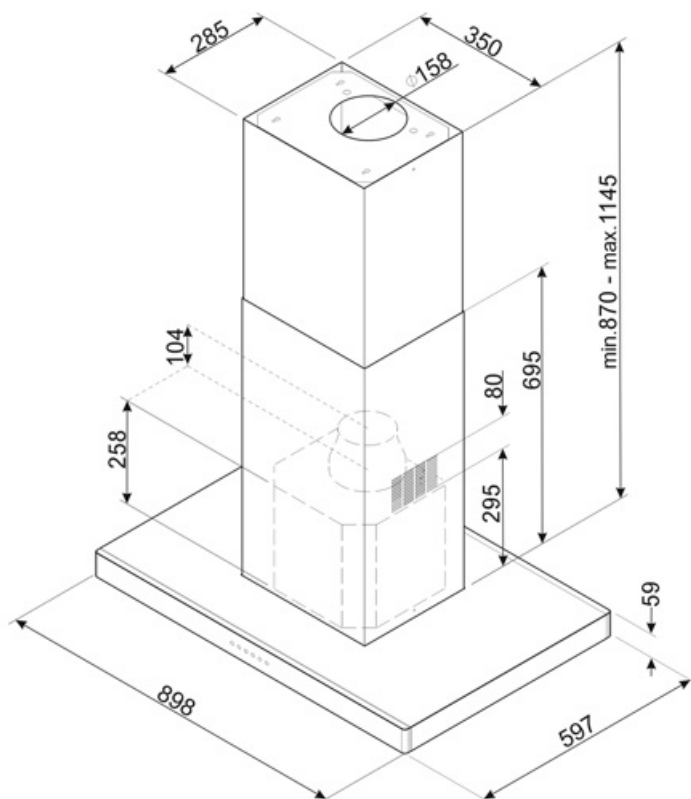

Compatible Accessories



FLT6

Filtros de carvão redondos (kit 2 peças)



KITALLFC

Filtro de carvão universal Aço inoxidável AISI 304 O filtro pode ser lavado na máquina lava-louça a 50 °C (água e detergente adequado) e para secar colocar no forno 180°C 25 minutos

Symbols glossary



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.



Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.



Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.



Configuração intensiva/turbo: quando a extração extra rápida é necessária.