

# KICGR70X



Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709262204
Hood width	70 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Silk screen







## Controls




Control setting	Electronic buttons	Display	1 a LED
Led color	Red		

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent	

## Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Free outlet maximum capacity	720 m <sup>3</sup> /h	Minimum distance from GAS hob	650 mm
Motor power	270 W	Minimum distance from ELECTRIC hob	550 mm
No. of filters	1		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	300	57
Speed 2	420	62
Speed 3	590	69
Intensive speed	690	72

## Accessories included

Tube reduction Yes

## Performance / Energy Label




Annual Efficiency Consumption (AEChood)	54 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	56 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	69 dBA
Fluid Dynamic Efficiency (FDE)	29,2	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	91 lux/W	Energy Efficiency Index	51,7
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	398 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	75,1 %	Measured air pressure at best efficiency point (Pbep)	417 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	158 W
Air flow at minumum speed (Qmin)	300 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	590 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	200 lux
Air flow at boost speed (Qboost)	690 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	69 dBA

## Electrical Connection

---

Electrical connection rating	272 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		

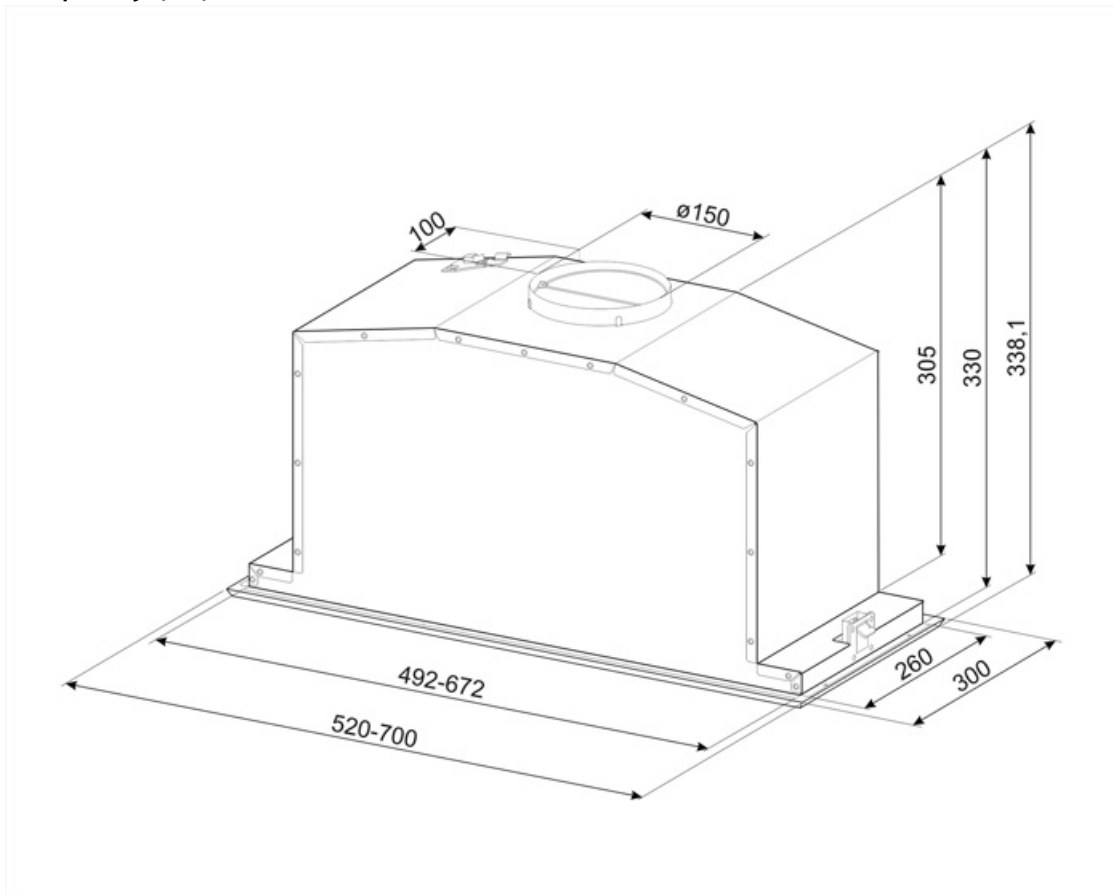

---

## Compatible Accessories

---

### KITFC152

Charcoal filters Round Kit 2 pieces



### KITVENT150

Motor inlet 150 mm with check valve



## Symbols glossary



**24h:** When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



**Energy efficiency class A**



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**Warning light(s):** to advise when filters need changing.



**Perimeter extraction panels:** very efficient and aid noise reduction.



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



A smart infrared system, which allows a hood and hob with this feature to work together.



**LED display:** to show programmes, functions and options selected and the time to the end of the cycle.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Intensive/turbo setting:** when extra fast extraction is required.