KICGR70X2



Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709346072
Hood width	70 cm
Aesthetic	Universale
Colour	Stainless Steel
Finishing	Satin
Logo	Silk screen

Controls

Control setting	Electronic buttons	**Display**	1 a LED
Led color	Red		

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Delay function	
Time-setting options	
Auto-Vent	

Technical Features

No. of lights	2	**No. of filters**	2
Light type	LED	**Anti-grease filters**	Aluminium
Light Power	1 W	**Filter replacement indicator**	Yes
Light color temperature (K)	4000 K	**Vent outlet**	150 mm

Free outlet maximum capacity	740 m³/h	**Minimum distance from GAS hob**	650 mm
Motor power	250 W	**Minimum distance from ELECTRIC hob**	550 mm

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	290	47
Speed 2	420	56
Speed 3	610	64
Intensive speed	720	68

Accessories included

Tube reduction	Yes


Performance / Energy Label



Annual Efficiency Consumption (AEChood)	54 kWh/a	**Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)**	47 dBA
Energy efficicency class (EEC)	A	**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)**	64 dBA
Fluid Dynamic Efficiency (FDE)	30,4	**Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)**	68 dBA
Fluid Dynamic Efficiency class (FDEC)	A	**Time increase factor (F)**	0,9
Lighting Efficiency (LE)	91 lux/W	**Energy Efficiency Index**	51,9
Lighting Efficiency Class (LEC)	A	**Measured air flow rate at best efficiency point (Qbep)**	390 m³/h
Grease Filtering Efficiency (GFE)	75,1 %	**Measured air pressure at best efficiency point (Pbep)**	455 Pa
Grease Filtering Efficiency Class (GFEC)	C	**Measured electric power input at best efficiency point (Wbep)**	162 W
Air flow at minumum speed (Qmin)	290 m³/h	**Nominal Power consumption of the light system (WL)**	2,2 W
Air flow at maximum speed (Qmax)	610 m³/h	**Average illumination of the light on the cooking surface (Emiddle)**	200 lux
Air flow at boost speed (Qboost)	720 m³/h	**Sound power level at highest setting (Lwa)**	64 dBA

Electrical Connection

Electrical connection rating	252 W	**Power supply cable length**	1500 mm
Voltage	220-240 V	**Plug**	Not present
Frequency (Hz)	50-60 Hz		

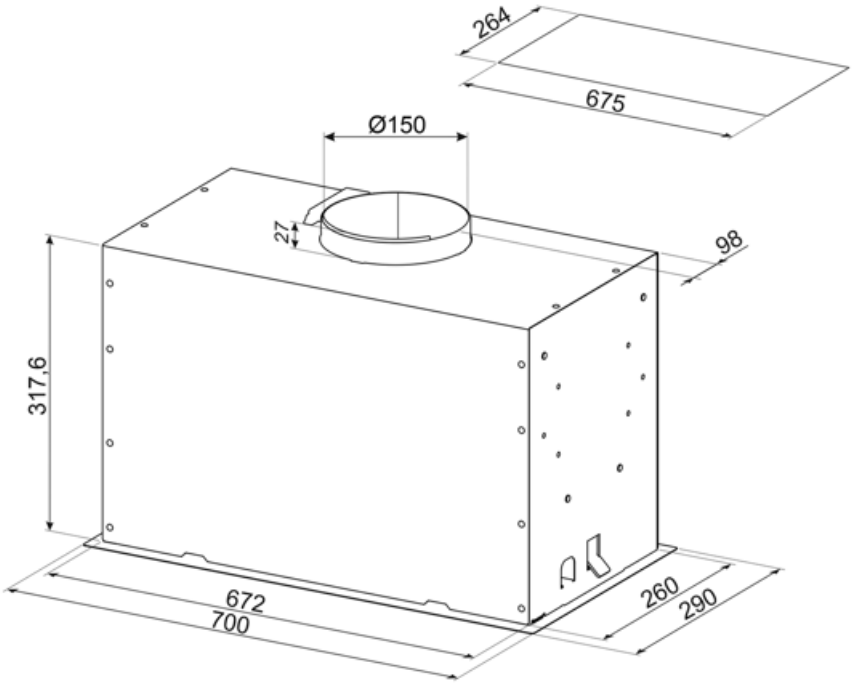

Compatible Accessories



KITFC152

Charcoal filters Round Kit 2 pieces



KITVENT150

Motor inlet 150 mm with check valve

Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Energy efficiency class A



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A smart infrared system, which allows a hood and hob with this feature to work together.



Delay timer: can be set to run the programme at a convenient time or to take advantage of off-peak energy periods.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.