

KICTIS90BL

Product family	Hood
Tipo de Exaustor	Decorative island hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	No
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709262174
Aesthetic	Universal
Colour	Stainless steel
Acabamento	Satin
Glass Type	Black
Logotipo	Logotipo embutido



Controls



Control setting	Touch control	Display	No
Led color	Red		

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	

Technical Features



Hood without motor	No	No. of filters	3
Remote motor	No	Anti-grease filters	Aluminium
No. of lights	4	Charcoal filters included	No
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Dimmer mode	No		

Free outlet maximum capacity	725 m³/h	Minimum distance from GAS hob	650 mm
Motor power	270 W	Minimum distance from ELECTRIC hob	500 mm
		Non return valve	No

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	300	52
Speed 2	420	59
Speed 3	580	66
Intensive speed	700	69

Accessories Included

Remote control	No	Tube reduction	Yes
Sliding door	No		

Performance / Energy Label




Consumo anual de energia (CAE exaustor)	43 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	52 dBA
Energy efficiency class (EEC)	A+	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	66 dBA
Fluid Dynamic Efficiency (FDE)	35	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	69 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,7
Lighting Efficiency (LE)	68 lux/W	Energy Efficiency Index	41,6
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	428 m³/h
Grease Filtering Efficiency (GFE)	75,1 %	Measured air pressure at best efficiency point (Pbep)	461 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	157 W
Air flow at minumum speed (Qmin)	300 m³/h	Nominal Power consumption of the light system (WL)	4 W
Air flow at maximum speed (Qmax)	580 m³/h	Average illumination of the light on the cooking surface (Emiddle)	300 lux
Air flow at boost speed (Qboost)	700 m³/h		

Sound power level at
highest setting (Lwa) 66 dBA

Electrical Connection

Plug	No	Frequency (Hz)	50-60 Hz
Electrical connection rating	274 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V		

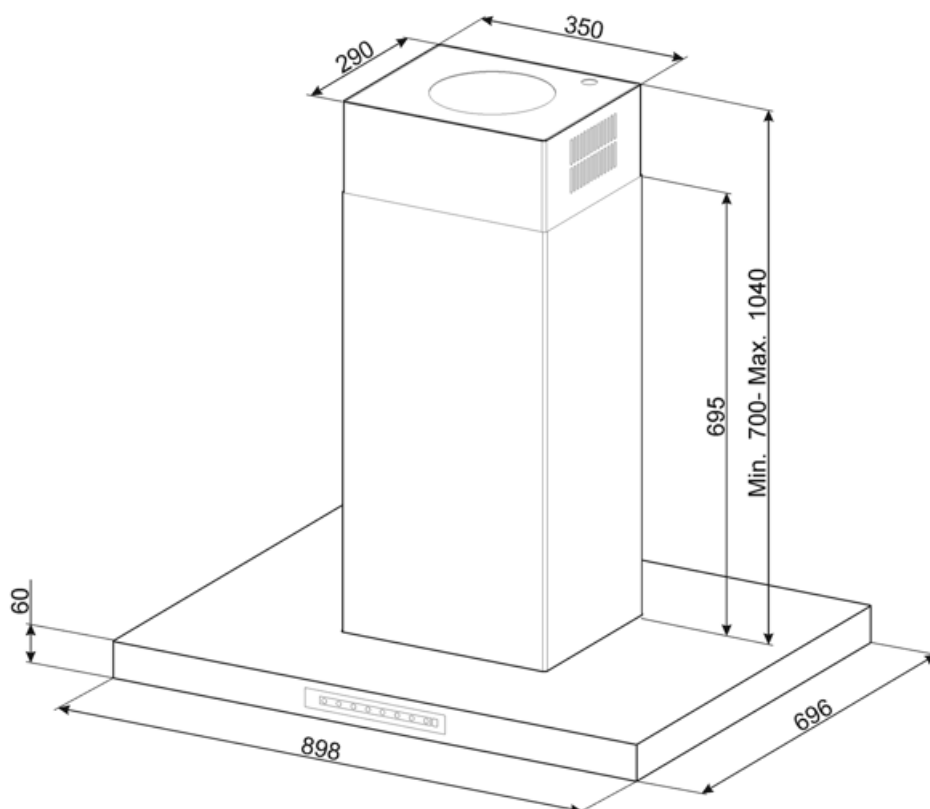

Compatible Accessories



KITFC161

Kit de filtros de carvão 2 peças



KITVENT150

Motor entrada 150 mm com válvula de não retorno

Symbols glossary

	24h: Quando selezionada, esta função refresca o ar durante cerca de 10 minutos a cada hora durante um período de 24 horas, a uma velocidade mínima e a um nível de ruído imperceptível.		Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.
	A+: A classe de eficiência energética A+ ajuda a economizar até 10% de energia em comparação com a classe A. O desempenho máximo com consumo mínimo é garantido.		Um sistema de infravermelhos inteligente, que permite que um exaustor e uma placa com este recurso trabalhem juntos.
	Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.		Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.
	Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.		Controles táteis: O controles táteis, fáceis de usar, permitem que o aparelho seja programado com o toque de um botão.
	Configuração intensiva/turbo: quando a extração extra rápida é necessária.		