

# KICV90BL



Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	Angled
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709262150
Hood width	90 cm



## Aesthetics





Aesthetics	Universal	Glass Type	Black
Colour	Black	Serigraphy colour	Grey
Finishing	Glass	Logo	Embossed

## Controls



Control setting	Touch control	Led colour	Red
-----------------	---------------	------------	-----

## Programs / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent	

## Technical Features



No. of lights	2	Anti-grease filters	Aluminium
---------------	---	---------------------	-----------

Light type	LED	Filter replacement indicator	Yes
Light power	1 W		
Free outlet maximum capacity	750 m³/h	Vent outlet	150 mm
Motor power	270 W	Minimum distance from GAS hob	450 mm
No. of filters	2	Minimum distance from ELECTRIC hob	450 mm

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	310	52
Speed 2	420	56
Speed 3	580	66
Intensive speed	720	70

## Accessories Included

Tube reduction	Yes
----------------	-----

## Performance / Energy Label


A\*

Annual Efficiency Consumption (AEChood)	41 KWh/year	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	62 dB(A)
Energy efficiency class (EEC)	A+	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	65 dB(A)
Fluid Dynamic Efficiency (FDE)	34.8	Power Consumption in Off mode (Po)	0.49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.7
Lighting Efficiency (LE)	68 lux/W	Energy Efficiency Index per first cavity	40.5
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	470 m³/h
Grease Filtering Efficiency (GFE)	45.1 %	Measured air pressure at best efficiency point (Qbep)	470 Pa
Grease Filtering Efficiency Class (GFEC)	F	Measured electric power input at best efficiency point (Wbep)	154 W
Air flow at minumum speed (Qmin)	310 m³/h	Normal Power of the light system (WI)	2 W
Maximum extraction rate	580 m³/h	Average illumination of the light on the cooking surface (Emiddle)	150 lux
Intensive extraction rate	720 m³/h		
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	52 dB(A)		

Sound power level at highest setting (Lwa) 62 dB(A)

Electrical Connection

Nominal power	272 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm

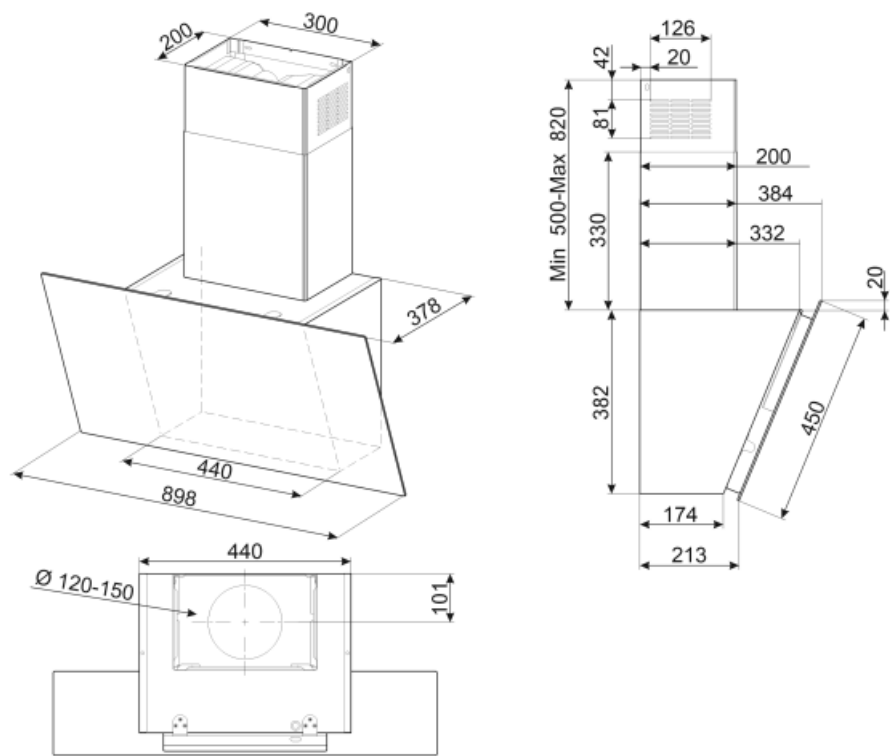

---

## Not included accessories

---



### KITFC152

Charcoal filters Round Kit 2 pieces



### KITALLFC











Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITVENT150

Imbocco motore 150 mm con valvola di non ritorno

## Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.
	Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.		A smart infrared system, which allows a hood and hob with this feature to work together.
	Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Perimeter extraction panels: very efficient and aid noise reduction.
	Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.		Intensive/turbo setting: when extra fast extraction is required.